


53-5150

40 WATT RMS, I" TWEETER

A 1" aluminum dome tweeter with an extremely detailed sound, and a low price point. Features an aluminum former, copper voicecoil, and a silk surround.





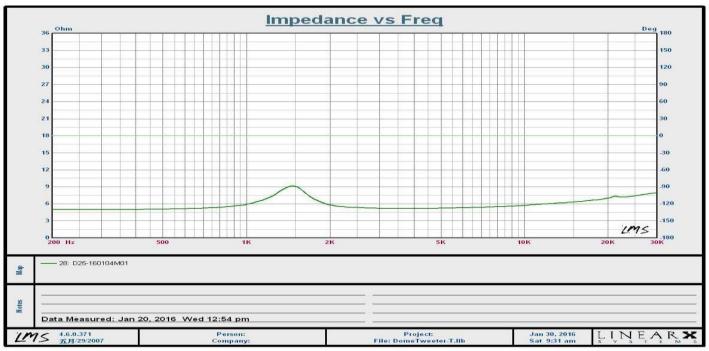



40 WATT RMS, I" TWEETER

SPECIFICATIONS

Frequency Response: 1475 ~ 20KHz Impedance: 6 ohms Re: 4.8 ohms Fo: 1475 Hz Sensitivity: 88dB



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mcm manufacturer:

Other Similar products are found below :

 NWTBATCAPMB13
 27-505
 27-4200
 27-840
 28-5958
 50-10820
 28-1510
 27-5918
 27-5977
 24-12352
 287-14020
 28-6023
 35SPS-3
 28

 6008
 21-4605
 21-4575
 21-19084
 21-12825
 27-570
 28-1525
 83-17604
 27-5833
 27-6020
 24-12345
 28-6017
 28-6032
 21-18966
 30-1530

 28-970
 27-560
 26-120
 CA68B
 24-12344
 28-6005
 24-13075
 PCM-2100-50
 21-18956
 28-6080
 24-5360
 24-1040
 27-5917
 28-6031

 HD15MM35N-100F
 28-975
 27-4270
 85-11102
 27-5940
 27-5949
 27-6112
 HD15MM35N-6F