


53-5165

50 WATT RMS, I" TWEETER

A I" aluminum dome tweeter that provides great accuracy, with no fatigue. Features an aluminum former, copper-clad aluminum voicecoil, and a silk surround.





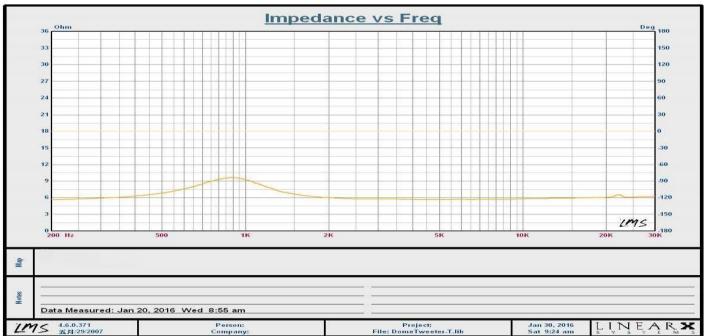



53-5165

50 WATT RMS, I" TWEETER

SPECIFICATIONS

Frequency Response: 890 ~ 20KHz

Impedance: 6 ohms

Re: 5.2 ohms Fo: 890 Hz

Sensitivity: 91dB



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mcm manufacturer:

Other Similar products are found below:

NWTBATCAPMB13 27-505 27-4200 27-840 28-5958 50-10820 28-1510 27-5918 27-5977 24-12352 287-14020 28-6023 35SPS-3 28-6008 21-4605 21-4575 21-19084 21-12825 27-570 28-1525 83-17604 27-5833 27-6020 24-12345 28-6017 28-6032 21-18966 30-1530 28-970 27-560 26-120 CA68B 24-12344 28-6005 24-13075 PCM-2100-50 21-18956 28-6080 24-5360 24-1040 27-5917 28-6031 HD15MM35N-100F 28-975 27-4270 85-11102 27-5940 27-5949 27-6112 HD15MM35N-6F