



Lead Coupler XHK

Insulated, made of brass. Both ends suitable for accepting spring-loaded \varnothing 4 mm plugs with rigid insulating sleeve.

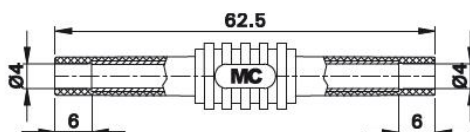

Order No.	Type	Rated voltage/current		*Colors ¹⁾
66.9123-*	XHK	1000 V, CAT II / 32 A	  us	<div style="display: flex; gap: 2px;"> <div style="width: 15px; height: 10px; background-color: black; color: white; text-align: center; font-size: 8px;">21</div> <div style="width: 15px; height: 10px; background-color: red; color: white; text-align: center; font-size: 8px;">22</div> <div style="width: 15px; height: 10px; background-color: blue; color: white; text-align: center; font-size: 8px;">23</div> <div style="width: 15px; height: 10px; background-color: yellow; color: black; text-align: center; font-size: 8px;">24</div> <div style="width: 15px; height: 10px; background-color: green; color: white; text-align: center; font-size: 8px;">25</div> </div>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [staubli](#) manufacturer:

Other Similar products are found below :

[23.3070-21,+ -22,+ -23,+ -24,+ -25](#) [61.7607-21 25M](#) [66.9706-21](#) [63.9358-22](#) [28.0127-10027](#) [49.0126-05023](#) [49.0126-20024](#) [28.0124-20029](#)
[22.2633-23](#) [23.3020-28](#) [66.9407-05028](#) [49.7049-24](#) [60.7008-999-21](#) [61.7664-999-23](#) [61.7612-100-22](#) [14.0034-29](#) [23.0440-21](#) [28.0116-](#)
[05022](#) [28.0116-05023](#) [24.0224-21](#) [65.9098-21](#) [64.9214-2122](#) [23.3060-24](#) [67.9799-22](#) [61.7607-29 25M](#) [23.3120-28](#) [49.0126-05024](#) [49.0126-](#)
[05025](#) [49.0079-05023](#) [66.9392-15022](#) [66.9407-05027](#) [66.9408-10028](#) [67.9770-100-21](#) [22.1027 & 22.2380-23](#) [61.7611-100-33](#) [60.7018-100-](#)
[21](#) [28.0116-20022](#) [28.0125-02522](#) [66.9328-25](#) [65.3314-21,+ -22,+ -23,+ -24,+ -25,+ -29](#) [22.3006-21](#) [28.0055-05024](#) [23.3120-20](#) [49.0126-](#)
[02525](#) [28.0126-05024](#) [28.0126-20020](#) [28.0124-05020](#) [28.0125-05021](#) [28.0125-20023](#) [22.2656-25](#)