

### Features

- ◆ I/O isolation voltage 3000 VACrms
- ◆ Reinforced insulation, rated for 300 VAC working voltage
- ◆ Certified to IEC/EN/UL 60950-1 safety standards
- ◆ Safety barrier 100 % production test
- ◆ Low coupling capacity
- ◆ Single-in-line package (SIP)
- ◆ Lead-free design, RoHS compliant
- ◆ 3-year product warranty



The TMV-EN series is a range of 1 Watt non-regulated DC/DC converters with high I/O-isolation. This product features an isolation barrier which is approved for supplementary an reinforced insulation. SMD construction and a special designed toroidal transformer made it possible to built these converters in a standard SIP package with a very small footprint. These features making the TMV-EN series an economical solution in many DC/DC converter applications requiring safety agency approval.

### Models

Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505 EN	5 VDC ±10 %	5 VDC	200 mA	66 %
TMV 0512 EN		12 VDC	80 mA	66 %
TMV 0515 EN		15 VDC	65 mA	66 %
TMV 0505D EN		±5 VDC	±100 mA	66 %
TMV 0512D EN		±12 VDC	±40 mA	72 %
TMV 0515D EN		±15 VDC	±30 mA	73 %
TMV 1205 EN	12 VDC ±10 %	5 VDC	200 mA	66 %
TMV 1212 EN		12 VDC	80 mA	66 %
TMV 1215 EN		15 VDC	65 mA	66 %
TMV 1205D EN		±5 VDC	±100 mA	66 %
TMV 1212D EN		±12 VDC	±40 mA	74 %
TMV 1215D EN		±15 VDC	±30 mA	75 %

### Input Specifications

Input current no load / full load	5 Vin models: 55 mA / 300 mA typ. 12 Vin models: 30 mA / 125 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 29 V max.
Reverse voltage protection	0.3 A max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	internal capacitor
Input fuse	recommended, required for compliance with CB
– recommended min. fuse rating	5 V models: 500 mA 12 V models: 200 mA

### Output Specifications

Voltage set accuracy	±3 % max.
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation: 1.2 % / 1 % change of Vin – Load variation 20 – 100 %: <10 %
Ripple and noise (20 MHz Bandwidth)	100 mVp-p typ.
Temperature coefficient	±0.02 %/K
Short circuit protection	limited 0.5 sec. max.
Capacitive load	single output models: 680 µF max. dual output models: 220 µF max. (each output)

### Isolation / Safety

Isolation voltage	– Isolation test voltage (tested for 1 sec.) – I/O isolation voltage (60 sec.) – Rated max. working voltage	4'500 Vpk 3'000 VACrms 300 VACrms / 640 Vpk
Isolation capacitance (input/output)		15 pF typ.
Isolation resistance (input/output)		>10 Gohm
Safety standards		IEC 60950-1:2005 +A1:2009 EN 60950-1:2006 +A1:2010 +A11:2009 +A12:2011 UL 60950-1, CSA C22.2 No. 60950-1-03
Safety approvals	– CB report (IEC & EN) – UL certification	<a href="http://www.tracopower.com/products/tmv-en-cb.pdf">www.tracopower.com/products/tmv-en-cb.pdf</a> <a href="http://www.tracopower.com/products/tmv-en-ul.pdf">www.tracopower.com/products/tmv-en-ul.pdf</a>

### General Specifications

Temperature ranges	– Operating – Max. ambient approved IEC/UL 60950-1 – Case temperature	–40°C to +85°C (with derating) +70°C +90°C max.
Derating		2.85 %/K above 70°C
Humidity (non condensing)		95 % rel H max.
Temperature coefficient		±0.02 %/K typ.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		>2'000'000 h
Switching frequency		80 kHz typ. (frequency modulation)
Frequency change over line and load		±30 % max.
Altitude during operation		4'000m max. (13'000 ft) approved
Environmental compliance	– Reach – RoHS	<a href="http://www.tracopower.com/overview/tmv-en">www.tracopower.com/overview/tmv-en</a> RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	non conductive plastic (UL 94V-0 rated)
Package weight	4.0 g (0.14 oz)
Soldering temperature	max. 265°C / 10 sec.

**Application note:** [www.tracopower.com/products/tmv-en-application.pdf](http://www.tracopower.com/products/tmv-en-application.pdf)

**Outline Dimensions**

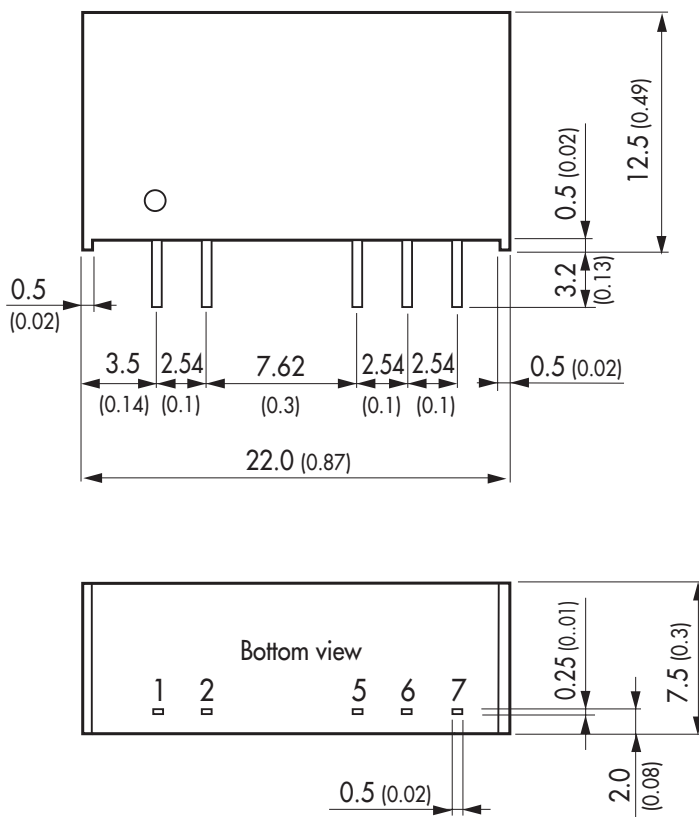

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Dimensions in [mm], ( ) = Inch  
Tolerance  $\pm 0.5$  (0.02)  
Pin pitch tolerance  $\pm 0.13$  (0.005)  
Pin width tolerance  $\pm 0.05$  (0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [traco manufacturer](#):*

Other Similar products are found below :

[TEL 2-1211](#) [TES 2N-2423](#) [TEL 3-4823](#) [TEL 3-1212](#) [TEL 15-1212](#) [TMR 0523](#) [TEN 40-1211](#) [TMR1-1213](#) [TPP40-105A-J](#) [TPP40-112A-J](#)  
[TPP40-148A-J](#) [TXM100-115](#) [TEL10-2410WI](#) [TEL10-2423WI](#) [TEL 2-2423](#) [TES 2N-0511](#) [TEN 15-2423WI](#) [TMA 1215S](#) [TMH 0512S](#) [TMH](#)  
[1205S](#) [TXL 060-3.3S](#) [TIM2-4819](#) [TPP30-109A-J](#) [TPP30-124A-J](#) [TRS2-0922](#) [TRS2-1223](#) [TMA 1512D](#) [TME 2409S](#) [TEN 5-1222](#) [TML](#)  
[15112](#) [TXL 100-05S](#) [TMR1-0515](#) [TPP30-148A-J](#) [TRS2-1222](#) [TEL10-4823WI](#) [TMPS10-105](#) [TEL 2-0521](#) [TEN 5-2410WI](#) [TMH 1212D](#)  
[TOS 06-05SM](#) [TEL 3-1211](#) [TEN 25-2423](#) [TIS 075-124](#) [TIS 500-124-230](#) [TCL 024-124DC](#) [TIM2-2410](#) [TMR1-4812SM](#) [TXM100-112](#)  
[TRS2-1212](#) [TEL10-4822WI](#)