


HE Series Reed Relays

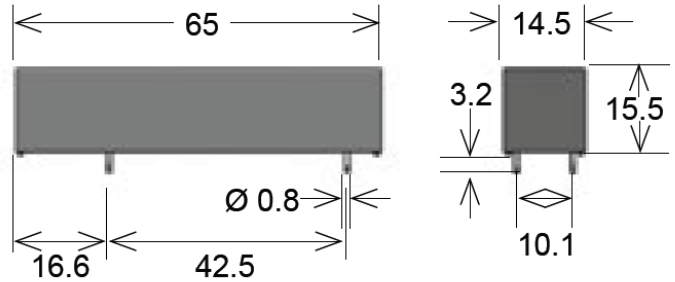

- Features: High Voltage Relay, Through-Hole / Axial Wire Option, Compact Design, Special Pin-Outs
- Applications: High Voltage Test Sets, Cable Testers, Medical Equipment & Others
- Markets: Medical, Test and Measurement & Others

Part Description: **HE 00-0X-00-00**

Nominal Voltage	Contact QTY	Contact Form	Switch Model	Pin Out
05, 06, 12, 24, 48	1, 2	A, B	69, 83	02, 03, 150, 300

Customer Options	Switch Model		Unit
	69	83	
Contact Data	69	83	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	50	50	W
Switching Voltage (max.) DC or peak AC	10,000	7,500	V
Switching Current (max.) DC or peak AC	3.0	3.0	A
Carry Current (max.) DC or peak AC	5.0	5.0	A
Contact Resistance (max.) @ 0.5V & 50mA	150	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	15	10	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	3.0	3.0	ms
Release Time (max.) Measured with no Coil Excitation	1.5	1.5	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10 ¹²	10 ¹²	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.2	0.2	pF

Coil Data		Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
Contact Form	Switch Model					
Unit		VDC	Ohm	VDC	VDC	mW
1A	69	12	110	9	1	1,310
		24	465	18	2	1,240
	83	12	260	9	1	554
		24	1050	18	2	554
1B*	69	12	260	9	1	554
		24	1,050	18	2	548
	83	12	410	9	1	351
		24	1,520	18	2	378
2A	83	12	140	9	1	1,000

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

* Re-closure of Form B may occur if the max. coil voltage is exceeded. Coil polarity on Form B must be observed. Pin 2 is positive.

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-20 to 70	°C
Storage Temperature	-35 to 105	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

HE Reed Relay




Handling & Assembly Instructions

- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.
- Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

Life Test Data

*Load increase reduces life expectancy of Reed Switches

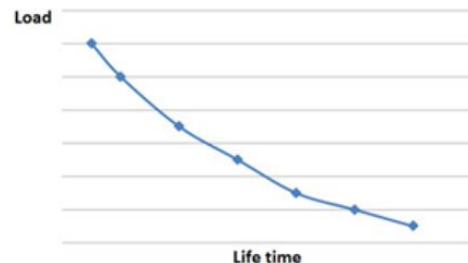


Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	




Pin Outs


Dimensions available in Product Datasheets.




HExx - 1A83 - 02
HExx - 1A69 - 02




HExx - 1A83
HExx - 1A69




HExx - 1B




HExx - 1A83 - 03
HExx - 1A69 - 03

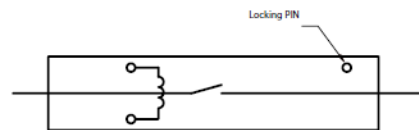

HExx - 1A83 - 150
HExx - 1A69 - 150

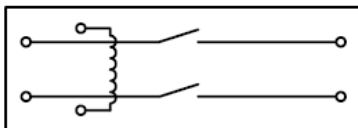

HExx - 2A

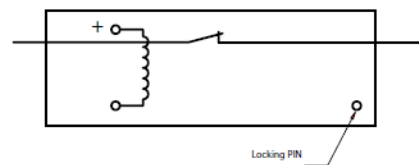

HExx - 1B83 - 150
HExx - 1B69 - 150

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [standexmeder](#) manufacturer:

Other Similar products are found below :

[MK18-B-500W](#) [DIP05-1A72-12L](#) [CRF05-1AS](#) [HE06-1B83-150](#) [HE24-1A83](#) [MK02/0-1A66-1000W](#) [SHV12-1A85-78L3K](#) [KT12-1A-BV88589](#) [SIL05-1A72-71QHR](#) [NDFEB 8X15MM](#) [BE12-2A85-BV420](#) [MK04-1A66B-500W](#) [DIP05-1A72-13L](#) [HM24-1A69-20-6](#) [HM12-1A83-06-UL](#) [H12-1B83](#) [KT12-1A-40L-THT](#) [SIL05-1A31-71L](#) [MK06-4-C](#) [LI05-1A85](#) [NDFEB 10X5X1.9MM](#) [LS01-1A66-PP-500W](#) [M11/M8](#) [LS02-1A66-PP-500W](#) [HM24-1A69-300](#) [LS02-1A66-PA-500W](#) [KT05-1A-40L-THT](#) [MK21M-1A66C-500W](#) [DIP24-1C90-51D](#) [SIL24-1A72-71D](#) [SIL24-1A75-71L](#) [DIP12-1A72-12L](#) [ORD211-1015](#) [DIP12-2A72-21L](#) [H24-1A83](#) [MK17-C-3](#) [SHV12-1A85-78L4K](#) [ALNICO500; 10X40MM](#) [HE24-1A83-02](#) [MS05-1A87-75DHR](#) [DIL05-2C90-63L](#) [DIP24-1A72-12L](#) [HM24-1A69-06](#) [DIP24-1A31-16D](#) [HE06-1A16](#) [MK03-1A66E-500W](#) [LS01-1A66-PA-500W](#) [ORD228VL-2030](#) [DIP05-1C90-51L](#) [ALNICO500 5X22MM](#)