


HM Series Reed Relays

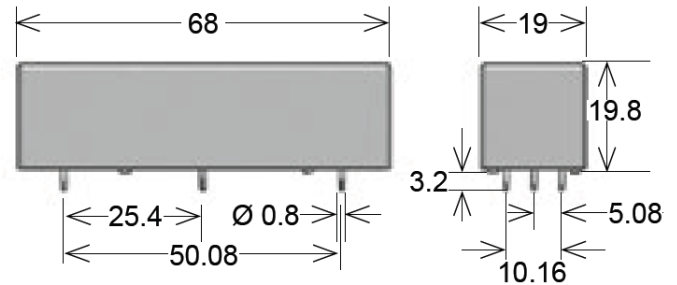

- Features: High Voltage Relay, Through-Hole / Axial Wire Option, Latching Version, Special Pin-Outs
- Applications: High Voltage Test Sets, Cable Testers, Medical Equipment & Others
- Markets: Medical, Test and Measurement & Others

Part-Description: **HM 00-0X00-000**

Nominal Voltage	Contact QTY	Contact Form	Switch Model	Pin Out
05, 12, 24	1	A, B	69, 83	02, 03, 06, 08, 26, 20-6, 150, 300

Customer Options	Switch Model		Unit
	69	83	
Contact Data			
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	50	50	W
Switching Voltage (max.) DC or peak AC	10,000	7,500	V
Switching Current (max.) DC or peak AC	3.0	3.0	A
Carry Current (max.) DC or peak AC	5.0	5.0	A
Contact Resistance (max.) @ 0.5V & 50mA	150	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	15	10	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	3.0	3.0	ms
Release Time (max.) Measured with no Coil Excitation	1.5	1.5	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10 ¹²	10 ¹²	Ohm
Capacitance (typ.) @ 10kHz across open Switch	1	1	pF

Coil Data		Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
Contact Form	Switch Model					
Unit		VDC	Ohm	VDC	VDC	mW
1A	69	05	30	3.8	0.5	833
		12	150	9	1	960
		24	600	18	2	960
	83	05	45	3.8	0.5	556
		12	250	9	1	576
		24	1,000	18	2	576
1B	69	05	60	3.8	0.5	556
		12	150	9	1	960
		24	1,000	18	2	576
	83	05	45	3.8	0.5	556
		12	250	9	1	576
		24	1,000	18	2	576

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-20 to 70	°C
Storage Temperature	-35 to 95	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

Handling & Assembly Instructions


- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.
- Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

HM Reed Relay



Life Test Data

*Load increase reduces life expectancy of Reed Switches

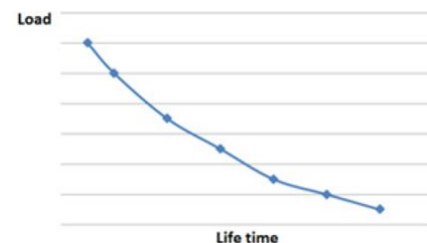

Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	




Pin Out

Top View


2.5mm [0.098"] pitch grid

HMxx-1Axx

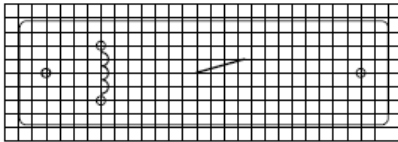


2.54mm [0.100"] pitch grid

HMxx-1Axx-02

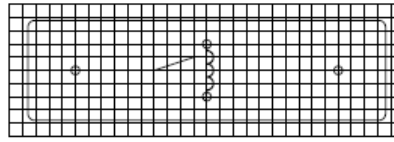


2.5mm [0.098"] pitch grid


HMxx-1Bxx-06

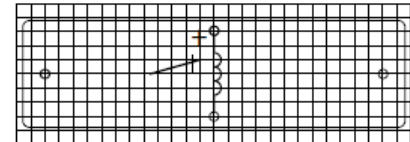


HMxx-1Axx-03

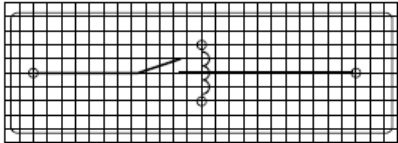


HMxx-1Axx-04

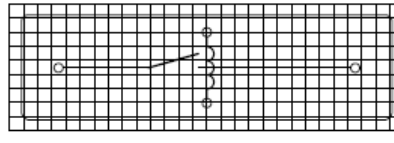


HMxx-1Bxx-105

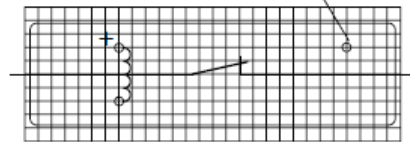


HMxx-1Axx-06

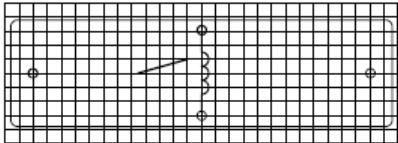

HMxx-1Axx-08

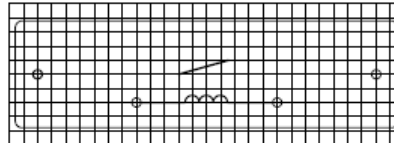

HMxx-1Axx-150

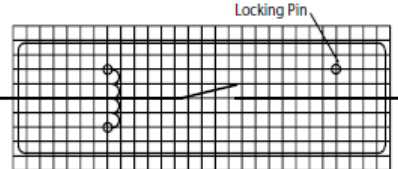

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [standexmeder](#) manufacturer:

Other Similar products are found below :

[MK18-B-500W](#) [DIP05-1A72-12L](#) [CRF05-1AS](#) [HE06-1B83-150](#) [HE24-1A83](#) [MK02/0-1A66-1000W](#) [SHV12-1A85-78L3K](#) [KT12-1A-BV88589](#) [SIL05-1A72-71QHR](#) [NDFEB 8X15MM](#) [BE12-2A85-BV420](#) [MK04-1A66B-500W](#) [DIP05-1A72-13L](#) [HM24-1A69-20-6](#) [HM12-1A83-06-UL](#) [H12-1B83](#) [KT12-1A-40L-THT](#) [SIL05-1A31-71L](#) [MK06-4-C](#) [LI05-1A85](#) [NDFEB 10X5X1.9MM](#) [LS01-1A66-PP-500W](#) [M11/M8](#) [LS02-1A66-PP-500W](#) [HM24-1A69-300](#) [LS02-1A66-PA-500W](#) [KT05-1A-40L-THT](#) [MK21M-1A66C-500W](#) [DIP24-1C90-51D](#) [SIL24-1A72-71D](#) [SIL24-1A75-71L](#) [DIP12-1A72-12L](#) [ORD211-1015](#) [DIP12-2A72-21L](#) [H24-1A83](#) [MK17-C-3](#) [SHV12-1A85-78L4K](#) [ALNICO500; 10X40MM](#) [HE24-1A83-02](#) [MS05-1A87-75DHR](#) [DIL05-2C90-63L](#) [DIP24-1A72-12L](#) [HM24-1A69-06](#) [DIP24-1A31-16D](#) [HE06-1A16](#) [MK03-1A66E-500W](#) [LS01-1A66-PA-500W](#) [ORD228VL-2030](#) [DIP05-1C90-51L](#) [ALNICO500 5X22MM](#)