


# TLS2200® Materials

BradyID.com/tls2200

## Polyester Labels for General Industrial ID (B-422, B-423, B-430, B-432, B-483, B-489, B-498)

White or clear label stock with choice of finish and adhesives for smooth or rough surfaces. Use for a wide variety of asset identification, panel labeling and general ID.

Portable Printers

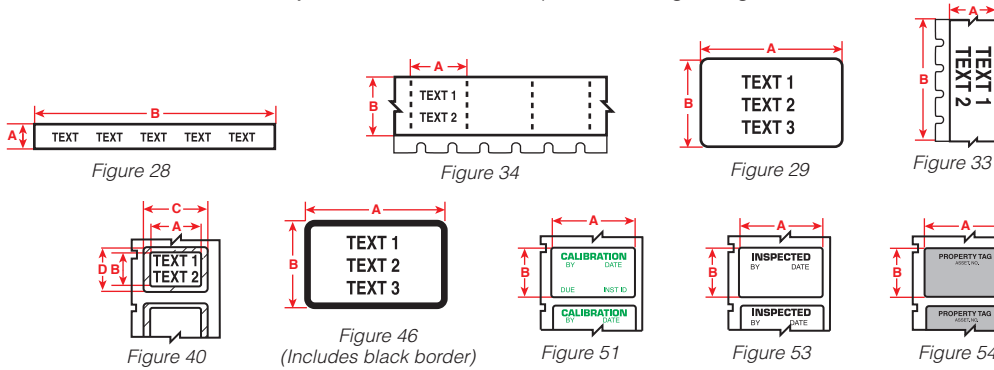

| Fits Printer Models                           | Diagram | Catalog #       | B-#   | Material  | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---|---------|-----------------|-------|-----------|-------|-------------------------|--------------------------|----------------|-----------------|-------------|
| <b>Standard adhesive (B-423 gloss white):</b> |         |                 |       |           |       |                         |                          |                |                 |             |
| TLS, BMP71*                                   | Fig. 29 | PTL-1-423       | B-423 | Polyester | White | 0.250 (6.4)             | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-3-423       | B-423 | Polyester | White | 0.375 (9.5)             | 0.375 (9.5)              | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-4-423       | B-423 | Polyester | White | 0.400 (10.6)            | 0.400 (10.2)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-5-423       | B-423 | Polyester | White | 0.500 (12.7)            | 0.200 (5.1)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 53 | PTL-6-423       | B-423 | Polyester | White | 0.500 (12.7)            | 0.275 (7.0)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-7-423      | B-423 | Polyester | White | 0.500 (12.7)            | 0.500 (12.7)             | 1              | 5000            | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-7-423       | B-423 | Polyester | White | 0.500 (12.7)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 33 | PTL-8-423       | B-423 | Polyester | White | 0.500 (12.7)            | 50 ft. (15.2 m)          | 1              | 1 Roll Cont.    | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-9-423       | B-423 | Polyester | White | 0.650 (16.5)            | 0.200 (5.1)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-10-423      | B-423 | Polyester | White | 0.750 (19.1)            | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-13-423      | B-423 | Polyester | White | 0.900 (22.9)            | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-14-423      | B-423 | Polyester | White | 1.000 (25.4)            | 0.187 (4.8)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-15-423      | B-423 | Polyester | White | 1.000 (25.4)            | 0.275 (7.0)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-16-423     | B-423 | Polyester | White | 1.000 (25.4)            | 0.375 (9.5)              | 1              | 5000            | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-16-423      | B-423 | Polyester | White | 1.000 (25.4)            | 0.375 (9.5)              | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-17-423     | B-423 | Polyester | White | 1.000 (25.4)            | 0.500 (12.7)             | 1              | 5000            | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-17-423      | B-423 | Polyester | White | 1.000 (25.4)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-19-423     | B-423 | Polyester | White | 1.000 (25.4)            | 1.000 (25.4)             | 1              | 2500            | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-19-423      | B-423 | Polyester | White | 1.000 (25.4)            | 1.000 (25.4)             | 1              | 250             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-20-423     | B-423 | Polyester | White | 1.000 (25.4)            | 2.000 (50.8)             | 1              | 1000            | R6010       |
| TLS, BMP71*                                   | Fig. 46 | PTL-24-423-BK   | B-423 | Polyester | White | 1.130 (28.7)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-25-423      | B-423 | Polyester | White | 1.250 (31.8)            | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-27-423      | B-423 | Polyester | White | 1.500 (38.1)            | 0.125 (3.2)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-28-423      | B-423 | Polyester | White | 1.500 (38.1)            | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | BM71-29-423     | B-423 | Polyester | White | 1.500 (38.1)            | 0.500 (12.7)             | 1              | 5000            | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-29-423      | B-423 | Polyester | White | 1.500 (38.1)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 51 | PTL-30-423-CALI | B-423 | Polyester | White | 1.500 (38.1)            | 0.750 (19.1)             | 1              | 250             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-31-423      | B-423 | Polyester | White | 1.500 (38.1)            | 1.000 (25.4)             | 1              | 250             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-32-423      | B-423 | Polyester | White | 1.500 (38.1)            | 1.500 (38.1)             | 1              | 250             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-2-423       | B-423 | Polyester | White | 2.000 (50.8)            | 0.250 (6.4)              | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-20-423      | B-423 | Polyester | White | 2.000 (50.8)            | 1.000 (25.4)             | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-26-423      | B-423 | Polyester | White | 2.750 (69.9)            | 1.250 (31.8)             | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-22-423      | B-423 | Polyester | White | 3.000 (76.2)            | 1.000 (25.4)             | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-37-423      | B-423 | Polyester | White | 3.000 (76.2)            | 1.900 (48.3)             | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-23-423      | B-423 | Polyester | White | 4.000 (101.6)           | 1.000 (25.4)             | 1              | 100             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-38-423      | B-423 | Polyester | White | 4.000 (101.6)           | 1.900 (48.3)             | 1              | 100             | R6010       |
| <b>Standard adhesive (B-430 clear):</b>       |         |                 |       |           |       |                         |                          |                |                 |             |
| TLS, BMP71*                                   | Fig. 33 | PTL-46-430      | B-430 | Polyester | Clear | 0.375 (9.5)             | 50 ft. (15.2 m)          | 1              | 1 Roll Cont.    | R6010       |
| TLS, BMP71*                                   | Fig. 53 | PTL-6-430       | B-430 | Polyester | Clear | 0.500 (12.7)            | 0.275 (7.0)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-44-430      | B-430 | Polyester | Clear | 0.500 (12.7)            | 0.375 (9.5)              | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-7-430       | B-430 | Polyester | Clear | 0.500 (12.7)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 33 | PTL-8-430       | B-430 | Polyester | Clear | 0.500 (12.7)            | 50 ft. (15.2 m)          | 1              | 1 Roll Cont.    | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-16-430      | B-430 | Polyester | Clear | 1.000 (25.4)            | 0.375 (9.5)              | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-17-430      | B-430 | Polyester | Clear | 1.000 (25.4)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 33 | PTL-42-430      | B-430 | Polyester | Clear | 1.000 (25.4)            | 50 ft. (15.2 m)          | 1              | 1 Roll Cont.    | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-45-430      | B-430 | Polyester | Clear | 1.050 (38.1)            | 0.375 (9.5)              | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-28-430      | B-430 | Polyester | Clear | 1.500 (38.1)            | 0.250 (6.4)              | 1              | 750             | R6010       |
| TLS, BMP71*                                   | Fig. 29 | PTL-29-430      | B-430 | Polyester | Clear | 1.500 (38.1)            | 0.500 (12.7)             | 1              | 500             | R6010       |
| TLS, BMP71*                                   | Fig. 33 | PTL-43-430      | B-430 | Polyester | Clear | 1.900 (48.3)            | 50 ft. (15.2 m)          | 1              | 1 Roll Cont.    | R6010       |

See all TLS2200® and PC Link™ Ribbon parts on page 323.

\* Yellow media adaptor required for use in the BMP®71 printer. See page 324.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [brady](#) manufacturer:*

Other Similar products are found below :

[BMP21-PLUS-KIT1](#) [M71C-2000-595-YL](#) [66271](#) [67063](#) [DAT-38-292-1](#) [DAT-38-292-2.5](#) [DAT-43-502-1](#) [134304](#) [ECL-107-619](#) [18453](#)  
[18617](#) [18669](#) [LAT-31-747-1](#) [LAT-5-747-10](#) [SCN03-1](#) [SCN03-8](#) [SCN10-7](#) [SCN10-8](#) [18472](#) [18489](#) [18581](#) [AF-1-9-PK](#) [PSPT-187-175-YL](#)  
[29690](#) [PTL-17-422](#) [PTL-42-439](#) [PWC-PK-1](#) [33108](#) [3450-A](#) [3450-D](#) [3450-G](#) [34511](#) [34513](#) [34515](#) [34517](#) [34518](#) [35400](#) [M71-22-423](#) [THT-](#)  
[12-727-10](#) [THT-17-7546-3](#) [THT-38-724-10](#) [THT-5-449-10](#) [THT-55-424-1](#) [THT-6-428-10](#) [THT-7-424-3](#) [33054](#) [33104](#) [33107](#) [3450-C](#) [3450-](#)  
[E](#)