


R&S® RTC1000 Oscilloscope Great value

1 50 MHz to 300 MHz
1 Two channels

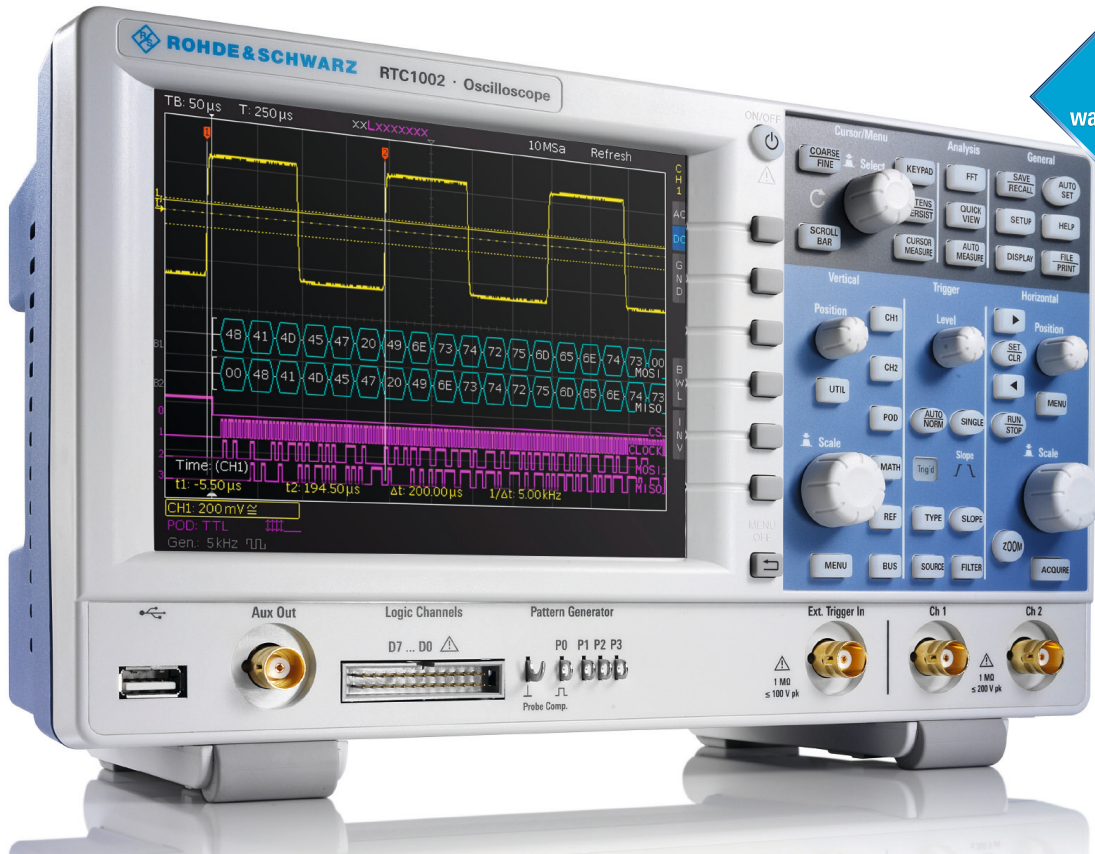

3 year warranty


ROHDE & SCHWARZ


Product Brochure | Version 03.01

R&S® RTC1000 Oscilloscope At a glance

High sensitivity, multifunctionality and a great price – that is what makes the R&S® RTC1000 oscilloscope so special.

From embedded developers to service technicians to educators – the wide range of functions address a broad group of users. State-of-the-art, high-performance technology in an extremely silent design meets the high requirements of today's customers. These oscilloscopes include a wide range of upgrade options, providing true investment protection for the future.

The R&S® RTC1000 is an X-in-one instrument that offers the functionality of an oscilloscope, logic analyzer, protocol analyzer, frequency analyzer, pattern generator, function generator, digital voltmeter and component tester in a single instrument.

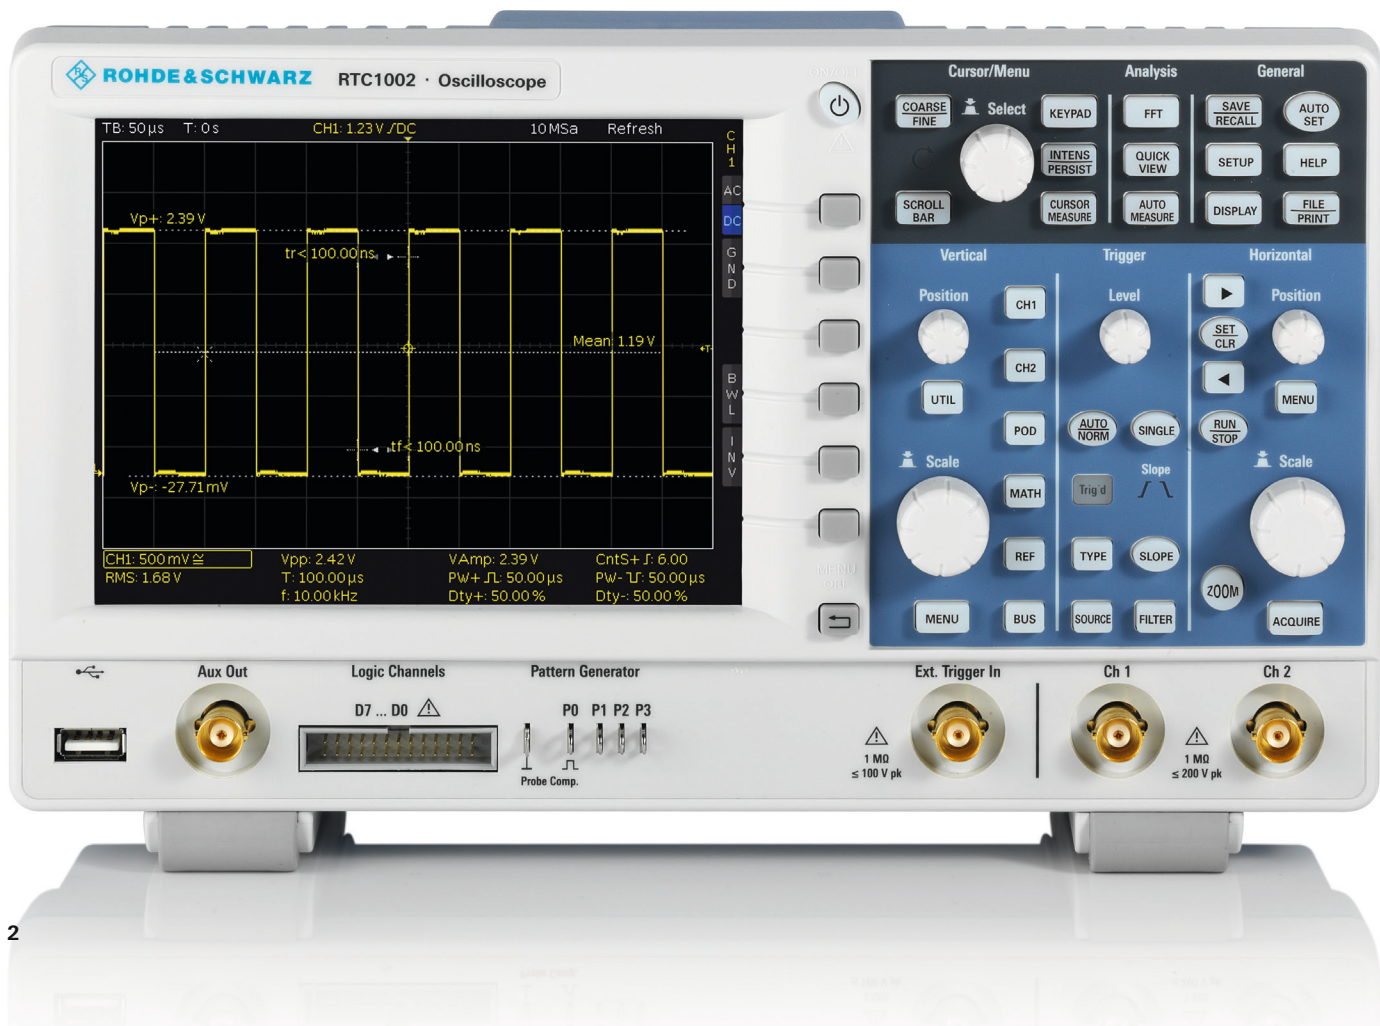

R&S® RTC1000

Oscilloscope

Benefits and key features

Top-class hardware-based acquisition for precise measurement results

- ▮ Up to 2 Gsample sampling rate
- ▮ 2 Msample memory depth
- ▮ Low-noise measurement due to state-of-the-art A/D converters

Versatile measurement functions and fast results

- ▮ Wide selection of automatic measurement functions
- ▮ QuickView: key results at the press of a button
- ▮ Mask test: easy creation of a new mask with just a few keystrokes
- ▮ FFT: the easy way to analyze the signal spectrum

X-in-1 oscilloscope

- ▮ Oscilloscope
- ▮ Logic analyzer
- ▮ Protocol analyzer
- ▮ Waveform and pattern generator
- ▮ Digital voltmeter
- ▮ Component tester
- ▮ Frequency analysis mode
- ▮ Mask test mode

▷ [page 6](#)

Future-ready investment and scalability

- ▮ Free firmware updates
- ▮ Bandwidth upgrades as required
- ▮ Serial bus analysis options via software licenses

Choose your Rohde & Schwarz embedded oscilloscope

	R&S® RTC1000	R&S® RTB2000	R&S® RTM3000	R&S® RTA4000
Number of scope channels	2	2/4	2/4	4
Bandwidth in MHz	50, 70, 100, 200, 300	70, 100, 200, 300	100, 200, 350, 500, 1000	200, 350, 500, 1000
Max. sampling rate in Gsample/s	1.25/channel, 2.5 interleaved	1.25/channel, 2.5 interleaved	2.5/channel, 5 interleaved	2.5/channel, 5 interleaved
Max. memory depth in Msample	1/channel, 2 interleaved	10/channel, 20 interleaved; 160 Msample (optional) segmented memory	40/channel, 80 interleaved; 400 Msample (optional) segmented memory	100/channel, 200 interleaved; 1 Gsample (standard) segmented memory
Vertical bits (ADC)	8	10	10	10
Min. input sensitivity	1 mV/div	1 mV/div	500 µV/div	500 µV/div
Display	6.5", 640 × 480 pixel	10" capacitive touch, 1280 × 800 pixel	10" capacitive touch, 1280 × 800 pixel	10" capacitive touch, 1280 × 800 pixel
Update rate	5000 waveforms/s	50 000 waveforms/s	64 000 waveforms/s	64 000 waveforms/s
MSO	8 channels, 1 Gsample/s	16 channels, 2.5 Gsample/s	16 channels, 5 Gsample/s	16 channels, 5 Gsample/s
Protocol (optional)	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, audio (I ² S), ARINC, MIL	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, audio (I ² S), ARINC, MIL
Generator(s)	1 ARB, 4-bit pattern generator	1 ARB, 4-bit pattern generator	1 ARB, 4-bit pattern generator	1 ARB, 4-bit pattern generator
Math	+, -, *, /, FFT (128k points)	+, -, *, /, FFT (128k points)	+, -, *, /, FFT (128k points), 21 advanced functions	+, -, *, /, FFT (128k points), 21 advanced functions
Rohde & Schwarz probe interface	–	–	standard	standard
RF capability	FFT	FFT	spectrum analysis	spectrum analysis

Excellent features

Two displays instead of one

- 20 vertical divisions with virtual screen for straightforward display of up to 13 signals
- Minimizable soft menus to enlarge horizontal waveform viewing area


Integrated logic analyzer (MSO)

- 8 additional digital channels
- Synchronous, time-correlated analysis of analog and digital components in embedded designs
- Fully retrofittable

Standard LAN and USB interface

- Seamless integration via MTP
- Remote display over LAN

Standard component tester

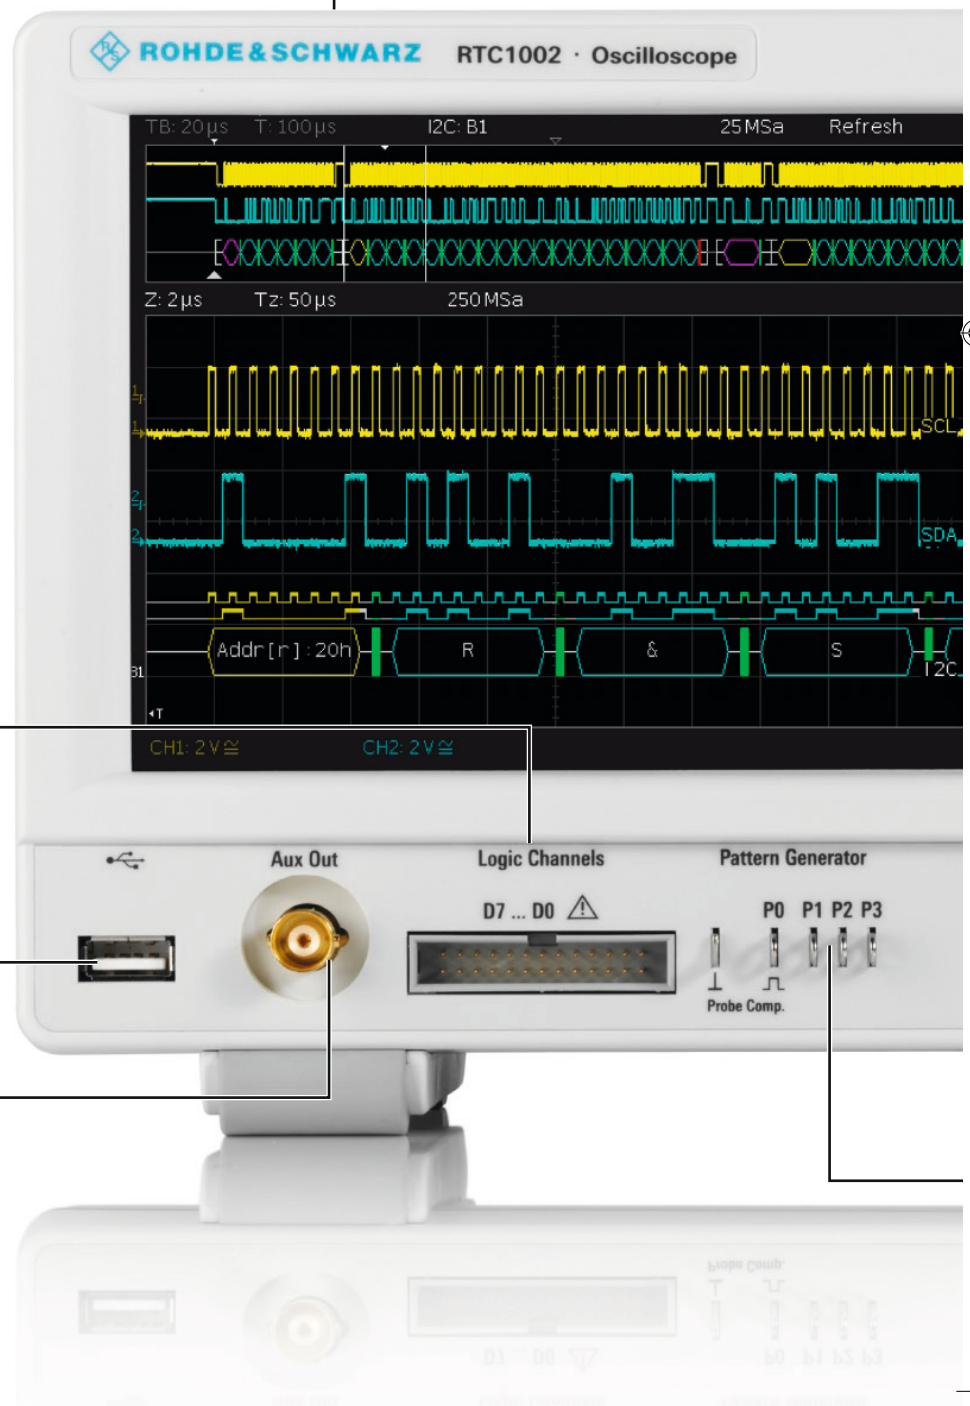

7 second boot time

FFT frequency analysis

- Standard, 128k points

QuickView: results at the push of a button

- Graphical display of key measurement results for the active signal

Autoset function

- Automatic selection of vertical, horizontal and trigger settings for optimal viewing of active signals

Documentation of results at the push of a button


Integrated waveform and pattern generator up to 50 Mbit/s

- Output of sine, square/pulse, ramp and noise waveforms
- Output of arbitrary waveform files and 4-bit signal patterns






X-in-1 oscilloscope

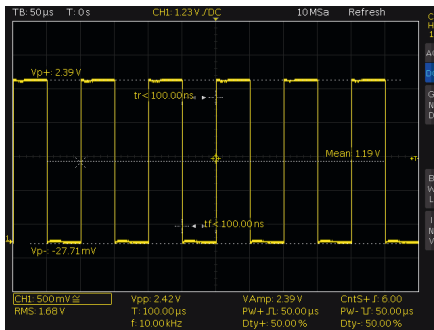


Oscilloscope

With a sampling rate of up to 2 Gsample/s and a memory depth of up to 2 Msample, the R&S®RTC1000 oscilloscope excels in its class. A waveform update rate of more than 10000 waveforms/s ensures a responsive instrument that reliably catches signal faults. Included tools provide quick results, e.g. QuickView, mask tests, FFT, math, cursors and automatic measurements (including statistics).

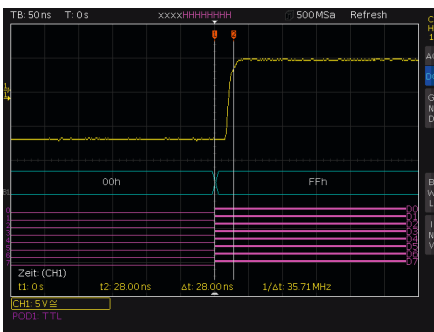


Logic analyzer

The R&S®RTC-B1 option turns every R&S®RTC1000 into an intuitive-to-use MSO with 8 additional digital channels. The oscilloscope captures and analyzes signals from analog and digital components in an embedded design – synchronously and time-correlated to each other. For example, the delay between the input and output of an A/D converter can be conveniently determined using the cursor measurements.

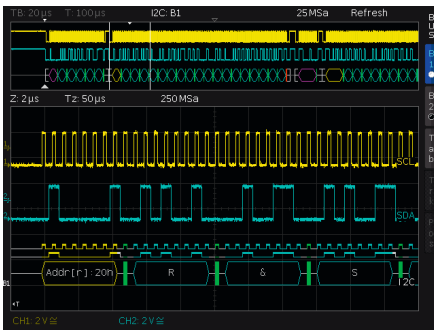

Protocol analyzer


Protocols such as I²C, SPI and CAN/LIN frequently transfer control messages between integrated circuits. The R&S®RTC1000 has versatile options for protocol-specific triggering and decoding of serial interfaces. Selective acquisition and analysis of relevant events and data is possible. With the hardware-based implementation, smooth operation and a high update rate are ensured even for long acquisitions. This is advantageous, for example, for capturing multiple packetized serial bus signals.

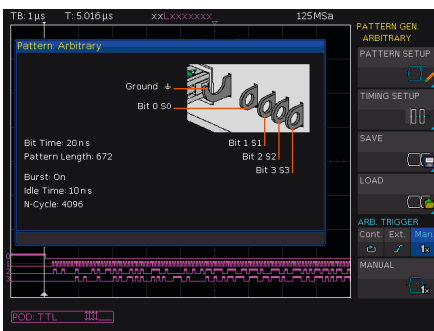

Waveform and pattern generator


The integrated R&S®RTC-B6 waveform and pattern generator up to 50 Mbit/s is useful for educational purposes and for implementing prototype hardware. In addition to common sine, square/pulse, ramp and noise waveforms, it outputs arbitrary waveforms and 4-bit patterns. Waveforms and patterns can be imported as CSV files or copied from oscilloscope waveforms. You can preview signals before playing them back to quickly check signal correctness. Predefined patterns for e.g. I²C, SPI, UART and CAN/LIN are provided.



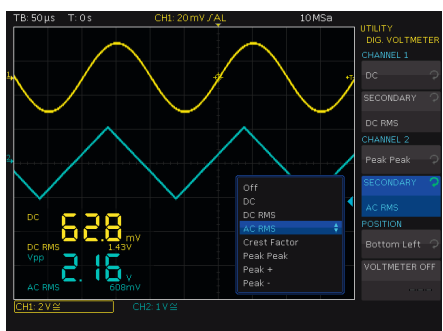


Digital voltmeter

For simultaneous measurements, the R&S®RTC1000 features a 3-digit digital voltmeter (DVM) and six-digit frequency counter on each channel. Provided measurement functions include DC, AC + DC (RMS) and AC (RMS).

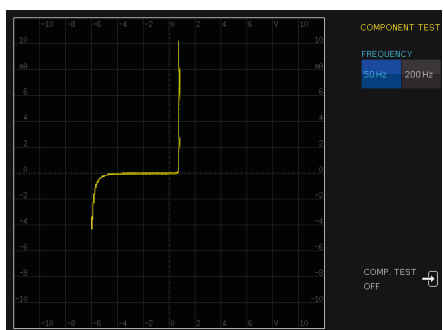


Component tester

You will also benefit from the included component tester. A 50 Hz and a 200 Hz measuring frequency are provided to support your potentially tedious search for faulty components. And since a picture says more than a thousand words – or rather a thousand values – you will be able to tell at a glance if your error analysis is on track.

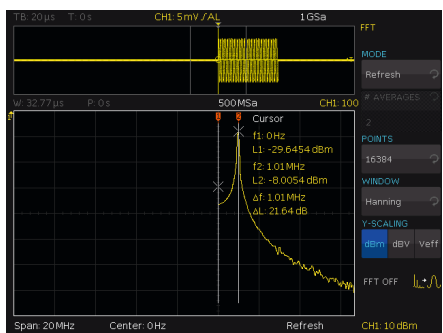

Frequency analysis mode

Difficult-to-find faults often result from the interaction between time and frequency signals. The FFT function of the R&S®RTC1000 is activated at the push of a button and by simply entering the center frequency and span. Thanks to the R&S®RTC1000 oscilloscopes' high-performance FFT functionality, signals can be analyzed with up to 128k points. Other practical tools include cursor measurements and autoset in the frequency domain.

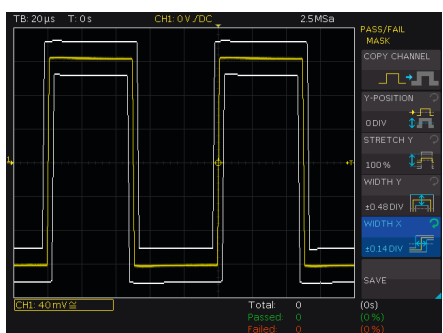

Mask test mode

Mask tests quickly reveal whether a specific signal lies within defined tolerance limits. Masks assess the quality and stability of a DUT based on statistical pass/fail evaluation. Signal anomalies and unexpected results are quickly identified. When the mask is violated, the measurement stops. Each violation generates a pulse output at the AUX-OUT connector of the R&S®RTC1000. This pulse output can be used to trigger actions in the measurement setup.



Specifications in brief

Specifications in brief		
Vertical system		
Number of channels		2
Bandwidth (-3 dB)	R&S®RTC1002 (with R&S®RTC-B220/-B221/-B222/-B223)	50/70/100/200/300 MHz
Rise time (calculated)	R&S®RTC1002 (with R&S®RTC-B220/-B221/-B222/-B223)	7/5/3.5/1.75/1.15 ns
Input impedance		1 M Ω \pm 2% 14 pF \pm 2 pF
Input sensitivity	max. bandwidth in all ranges	1 mV/div to 10 V/div
DC gain accuracy	offset and position = 0, maximum operating temperature change of \pm 5°C after self-alignment	
	input sensitivity all ranges	3%
Acquisition system		
Maximum realtime sampling rate		1 Gsample/s, 2 Gsample interleaved
Acquisition memory		1 Msample, 2 Msample interleaved
Horizontal system		
Timebase range		1 ns/div to 100 s/div
Trigger system		
Trigger types	standard	edge, width, video (PAL, SECAM, PAL-M, SDTV, HDTV), pattern, timeout
	option	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN
Analysis and measurement functions		
QuickView	at the push of a button, internal measurement values are written directly onto the waveform and updated continuously	peak-to-peak voltage, pos./neg. peak, rise/fall time, mean value, RMS value, time, frequency
Automated measurements		burst width, count positive/negative pulses, count falling/rising edges, mean value, RMS cycle, RMS, mean cycle, peak \pm , frequency, period, amplitude, base level, pos./neg. overshoot, pulse width, duty cycle \pm , rise/time, delay, phase
Waveform mathematics		addition, subtraction, multiplication, division, FFT
MSO option		
Digital channels		8 (1 logic probe)
Sampling rate		1 Gsample/s
Acquisition memory		1 Msample
Waveform generator option		
Resolution, sampling rate		8-bit, 978 ksample/s
Amplitude	high Z; 50 Ω	60 mV to 6 V (V_{pp}); 30 mV to 3 V (V_{pp})
DC offset	sine	0.1 Hz to 50 kHz
	pulse/rectangle and ramp/triangle	0.1 Hz to 10 kHz
4-bit pattern generator option		
Programmable pattern	sample time	20 ns to 42 s, up/down
	memory depth	2048 sample
4-bit counter	frequency	100 mHz to 50 MHz
Square wave	frequency	1 mHz to 500 kHz
Digital voltmeter		
Measurements	DC, AC + DC RMS, AC RMS resolution	up to 3 digits
Frequency counter		
Resolution		6 digits
General data		
Screen		6.5" VGA color display (640 \times 480 pixel)
Interfaces		1 \times USB host, USB device, LAN, GPIB (optional), DVI-D for external monitor
Audible noise	maximum sound pressure level at a distance of 0.3 m	30.4 dB(A)
Dimensions	W \times H \times D	285 mm \times 175 mm \times 140 mm (11.22 in \times 6.89 in \times 5.51 in)
Weight		1.7 kg (3.75 lb)

Ordering information

Designation	Type	Order No.
R&S®RTC1000 base model		
Oscilloscope, 50 MHz, 2 channels	R&S®RTC1002	1335.7500P02
Base unit (including standard accessories: R&S®RT-ZP03 passive probe per channel, R&S®RTC-B6 waveform generator, power cord, getting started manual and safety instructions)		
Choose your bandwidth upgrade		
Upgrade of R&S®RTC1002 to 70 MHz bandwidth	R&S®RTC-B220	1335.7300.03
Upgrade of R&S®RTC1002 to 100 MHz bandwidth	R&S®RTC-B221	1335.7317.03
Upgrade of R&S®RTC1002 to 200 MHz bandwidth	R&S®RTC-B222	1335.7275.03
Upgrade of R&S®RTC1002 to 300 MHz bandwidth	R&S®RTC-B223	1335.7323.03
Choose your options		
Mixed Signal Upgrade for non-MSO models, 250 MHz	R&S®RTC-B1	1335.7281.03
Waveform Generator	R&S®RTC-B6	1335.7298.03
I ² C/SPI Serial Triggering and Decoding	R&S®RTC-K1	1335.7230.03
UART/RS-232/RS-422/RS-485 Serial Triggering and Decoding	R&S®RTC-K2	1335.7246.03
CAN/LIN Serial Triggering and Decoding	R&S®RTC-K3	1335.7252.03
Application Bundle, consists of the following options: R&S®RTC-K1, R&S®RTC-K2, R&S®RTC-K3, R&S®RTC-B6	R&S®RTC-PK1	1335.7330.03
Choose your additional probes		
Single-ended passive probes		
300 MHz, 10 MHz, 10:1/1:1, 10 M Ω /1 M Ω , 400 V, 12 pF/82 pF	R&S®RT-ZP03	3622.2817.02
500 MHz, 500 MHz, 10:1, 300 V (RMS), 10 pF	R&S®RT-ZP05	3623.2927.02
500 MHz, 10 M Ω , 10:1, 400 V, 9.5 pF	R&S®RTM-ZP10	1409.7708.02
38 MHz, 1 M Ω , 1:1, 55 V, 39 pF	R&S®RT-ZP1X	1333.1370.02
High voltage single-ended passive probes		
250 MHz, 100:1, 100 M Ω , 850 V, 6.5 pF	R&S®RT-ZH03	1333.0873.02
400 MHz, 100:1, 50 M Ω , 1000 V, 7.5 pF	R&S®RT-ZH10	1409.7720.02
400 MHz, 1000:1, 50 M Ω , 1000 V, 7.5 pF	R&S®RT-ZH11	1409.7737.02
Current probes		
20 kHz, AC/DC, 10 A/1000 A	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 30 A	R&S®RT-ZC03	1333.0844.02
10 MHz, AC/DC, 150 A	R&S®RT-ZC10	1409.7750.02
100 MHz, AC/DC, 30 A	R&S®RT-ZC20	1409.7766.02
120 MHz, AC/DC, 5 A	R&S®RT-ZC30	1409.7772.02
Power Supply for current probes	R&S®RT-ZA13	1409.7789.02
Active differential probes		
100 MHz, 1000:1/100:1, 8 M Ω , 1000 V (RMS), 3.5 pF	R&S®RT-ZD01	1422.0703.02
200 MHz, 10:1, 1 M Ω , 20 V diff., 3.5 pF	R&S®RT-ZD02	1333.0821.02
Logic probes		
Active 8 Channel Logic Probe	R&S®RT-ZL03	1333.0715.02
Probe accessories		
Feedthrough Termination 50 Ω	R&S®HZ22	3594.4015.02
Adapter, BNC to 4 mm dual banana	R&S®RT-ZA11	1333.0796.02
Choose your accessories		
Soft Case, for R&S®RTC1002 oscilloscope and accessories	R&S®RTC-Z3	1333.0867.02
Rackmount Kit	R&S®ZZA-RTC1K	1333.0967.02

Oscilloscope portfolio



Multi
Domain



Multi
Domain

R&S® family	RTH1000	RTC1000	RTB2000	RTM3000
Vertical				
Bandwidth	60/100/200/350/500 MHz ¹⁾	50/70/100/200/300 MHz ¹⁾	70/100//200/300 MHz ¹⁾	100/200/350/500 MHz/1 GHz ¹⁾
Number of channels	2 plus DMM/4	2	2/4	2/4
V/div 1 MΩ	2 mV to 100 V	1 mV to 10 V	1 mV to 5 V	500 μV to 10 V
V/div 50 Ω	–			500 μV to 1 V
Horizontal				
Sampling rate	1.25 Gsample/s per channel (4-channel model); 2.5 Gsample/s per channel (2-channel model); 5 Gsample/s (all channels interleaved)	1 Gsample/s per channel 2 Gsample/s (2 channels interleaved)	1.25 Gsample/s per channel; 2.5 Gsample/s (2 channels interleaved)	2.5 Gsample/s per channel; 5 Gsample/s (2 channels interleaved)
Max. memory (per channel/1 channel active)	125 ksample (4-channel model); 250 ksample (2-channel model); 500 ksample (50 Msample in segmented memory mode ²⁾)	1 Msample; 2 Msample	10 Msample; 20 Msample (160 Msample in segmented memory mode ²⁾)	40 Msample; 80 Msample (400 Msample in segmented memory mode ²⁾)
Segmented memory	option	–	option	
Acquisition rate	50 000 waveforms/s	10 000 waveforms/s	50 000 waveforms/s	64 000 waveforms/s (700 000 waveforms/s in fast segmented memory mode ²⁾)
Trigger				
Options	advanced, digital trigger (14 trigger types) ²⁾	elementary (5 trigger types)	basic (6 trigger types)	basic (7 trigger types)
Mixed signal option				
No. of digital channels ¹⁾	8	8	16	16
Sampling rate of digital channels	1.25 Gsample/s	1 Gsample/s	1.25 Gsample/s	two logic probes: 2.5 Gsample/s on each channel; one logic probe: 5 Gsample/s on each channel
Max. memory of digital channels	125 ksample	1 Msample	10 Msample	80 Msample
Analysis				
Cursor meas. types	4	13	4	4
Stand. meas. functions	35	31	31	31
Mask test	elementary (tolerance mask around the signal)			
Mathematics	elementary			basic (math on math)
Serial protocols triggering and decoding ¹⁾	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, CAN-FD, SENT (6)	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN (4)		I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429 (7)
Display functions	data logger	–	–	–
Applications ¹⁾	high resolution frequency counter, advanced spectrum analysis, harmonics analysis	–	digital voltmeter (DVM)	power, digital voltmeter (DVM), spectrum analysis and spectrogram
Compliance testing ¹⁾	–	–	–	–
Display and operation				
Size and resolution	7", color, 800 × 480 pixel	6.5", color, 640 × 480 pixel	10.1", color, 1280 × 800 pixel	10.1", color, 1280 × 800 pixel
Operation	optimized for touchscreen operation, parallel button operation	optimized for fast button operation	optimized for touchscreen operation, parallel button operation	
General data				
Size in mm (W × H × D)	201 × 293 × 74	285 × 175 × 140	403 × 189 × 142	403 × 189 × 142
Weight in kg	2.4	1.7	2.5	3.3
Battery	lithium-ion, > 4 h	–	–	–

¹⁾ Upgradeable.

²⁾ Requires an option.



RTA4000	RTE1000	RTO2000
200/350/500 MHz/1 GHz ¹⁾	200/350/500 MHz/1.5/2 GHz ¹⁾	600 MHz/1/2/3/4/6 GHz ¹⁾
4	2/4	2/4 (only 4 channels in 4 GHz and 6 GHz model)
500 µV to 10 V	500 µV to 10 V	1 mV to 10 V (500 µV to 10 V) ²⁾
500 µV to 1 V	500 µV to 5 V	1 mV to 1 V (500 µV to 1 V) ²⁾
2.5 Gsample/s per channel; 5 Gsample/s (2 channels interleaved)	5 Gsample/s per channel	10 Gsample/s per channel; 20 Gsample/s (2 channels interleaved in 4 GHz and 6 GHz model)
100 Msample; 200 Msample (1 Gsample in segmented memory mode ²⁾)	50 Msample/200 Msample	standard: 50 Msample/200 Msample; max. upgrade: 1 Gsample/2 Gsample
option	standard	standard
64 000 waveforms/s (700 000 waveforms/s in fast segmented memory mode ²⁾)	1 000 000 waveforms/s (2 000 000 waveforms/s in ultra-segmented memory mode)	1 000 000 waveforms/s (3 000 000 waveforms/s in ultra-segmented memory mode)
basic (7 trigger types)	advanced, digital trigger (13 trigger types)	advanced (includes zone trigger), digital trigger (14 trigger types) ²⁾
16	16	16
two logic probes: 2.5 Gsample/s on each channel; one logic probe: 5 Gsample/s on each channel	5 Gsample/s	5 Gsample/s
200 Msample	100 Msample	200 Msample
4	3	3
31	47	47
elementary (tolerance mask around the signal)	advanced (freely configurable, hardware-based)	
basic (math on math)	advanced (formula editor)	advanced (formula editor)
I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429 (7)	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429, FlexRay™, CAN-FD, USB 2.0/HSIC, Ethernet, Manchester, NRZ, SENT, SpaceWire, CXPI, USB Power Delivery, automotive Ethernet 100BASE-T1 (18)	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429, FlexRay™, CAN-FD, MIPI RFFE, USB 2.0/HSIC, MDIO, 8b 10b, Ethernet, Manchester, NRZ, SENT, MIPI D-PHY, SpaceWire, MIPI M-PHY/UniPro, CXPI, USB 3.1 Gen1, PCIe 1.1/2.0, USB Power Delivery, automotive Ethernet 100BASE-T1 (26)
–	histogram, trend, track ²⁾	
power, digital voltmeter (DVM), spectrum analysis and spectrogram	R&S®RTM applications + 16-bit high definition mode, advanced spectrum analysis and spectrogram	R&S®RTE applications + jitter, clock data recovery, I/Q data, RF analysis
–	–	various options available, for details see data sheet (PD 3607.2684.22)
10.1", color, 1280 × 800 pixel	10.4", color, 1024 × 768 pixel	12.1", color, 1280 × 800 pixel
optimized for touchscreen operation, parallel button operation		
403 × 189 × 142	427 × 249 × 204	427 × 249 × 204
3.3	8.6	9.6
–	–	–





Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners
PD 3607.4287.12 | Version 03.01 | November 2017 (sk)
R&S®RTC1000 Oscilloscope
Data without tolerance limits is not binding | Subject to change
© 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607428712

3607_4287.12_03.01_PDF_1_en



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [rohde & schwarz](#) manufacturer:

Other Similar products are found below :

[HMF2525](#) [HMP2020](#) [HMP2030](#) [HZ22](#) [HZ24](#) [HV512](#) [HMC8041](#) [RTC1K-102](#) [RTC1K-202](#) [HA-Z211](#) [RTB2002 \(RTB2K-72\)](#) [RTB2002 + RTB-B221 \(RTB2K-102\)](#) [RTM-B222](#) [RTM-B223](#) [RTM-B225](#) [RTM-B2210](#) [RTM-B243](#) [RTM-B2410](#) [R&S FPL1003-P4](#) [R&S® FPH-B8](#) [NGL-K103](#) [FPC-COM1](#) [RTB2K-202](#) [HMC8042](#) [HZ42](#) [RTB2K-104](#) [HA-Z302](#) [RTB-PK1](#) [RTM-K1](#) [RTM-B242](#) [R&S HMP4030](#) [NGE103B](#) [R&S NRX](#) [R&S RTM-K36](#) [RTB2K-COM4](#) [HMC8012](#) [HM8118.02](#) [RTM-K3](#) [RTM-K15](#) [RTM-K18](#) [R&S HM7042-5](#) [RTB2004 \(RTB2K-74\)](#) [RTM3K-COM4](#) [RTM-K2](#) [RTM-K5](#) [RTM-K6](#) [RTM-K7](#) [RTM-K31](#) [NGL-B105](#) [NGE-COM3A](#)