

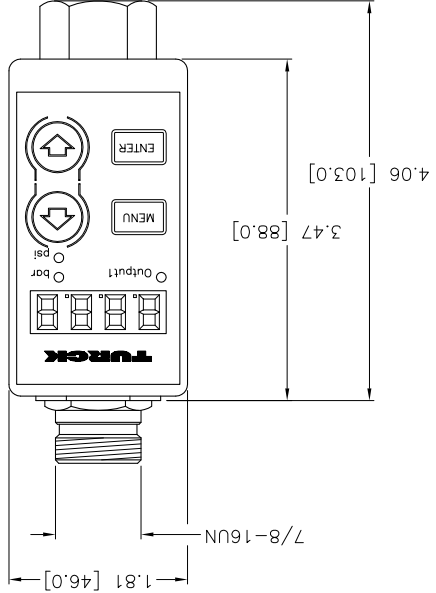


REV	A	DESCRIPTION	DRAWING RELEASE	BY	RDS	DATE	12/13/01	ECO NO.	T5077
<p>FINISH</p> <p>MATERIAL</p> <p>1. 2. 3. 4.</p> <p>RELATED DOCUMENTS</p>									
<p>3RD ANGLE PROJECTION</p> <p>THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</p> <p>TURCK INC 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p> <p>DRFT RDS DATE 11/12/01</p> <p>DESCRIPTION PC010-G11/4A1M-ARX-B1151</p> <p>UNIT OF MEASUREMENT</p> <p>SCALE 1=2.0</p> <p>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</p> <p>CONTACT TURCK FOR MORE INFORMATION</p> <p>INCH [MILLIMETER]</p> <p>DO NOT SCALE THIS DRAWING</p> <p>FILE: m6831068</p> <p>SHEET 1 OF 1</p>									

SOURCE DRAWING - FOR REFERENCE ONLY

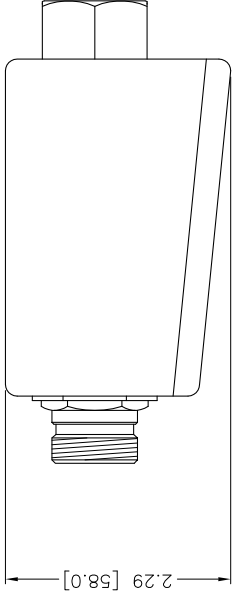

SPECIFICATIONS	
DISCRETE OUTPUT	RELAY, PROGRAMMABLE N.O. OR N.C.
RIPPLE	≤ 10%
SWITCHING CURRENT	≤ 2.5 A (INDUCTIVE LOAD)
CURRENT CONSUMPTION	≤ 32 mA
SWITCHING FREQUENCY	50 Hz
SWITCHING DELAY	SWITCH-ON AND SWITCH-OFF DELAY
OUTPUT RESPONSE TIME	ADJUSTABLE FROM 0-50 SECONDS IN STEPS OF 1 SECOND
POWER-ON EFFECT	PER IEC 947-5-2
REVERSE POLARITY PROTECTION	YES
TRANSIENT PROTECTION	EN 60947-5-2
AMBIENT TEMPERATURE	-25°C TO 75° (-13°F TO 167°F)
MEDIUM TEMPERATURE	-15°C TO 80° (5°F TO 176°F)
ENCLOSURE	MEETS NEMA 4, 6, 12, 13 AND IP 67
SHOCK	50 g PER IEC 68-2-27
VIBRATION	5 g (25-200 Hz) AND 35 g (60-2000 Hz) PER IEC 68-2-6
SETPOINT	≤ 2% OF RATED OVERALL RANGE
REPEATABILITY	≤ 0.5% OF RATED OVERALL RANGE
MEASURING VALUE/PROGRAMMING	4-DIGIT 7 SEGMENT DISPLAY (bar/psi)
STATUS DISPLAY	LEDS INDICATE OUTPUT STATUS AND SELECTED MEASURING UNITS (bar/psi)

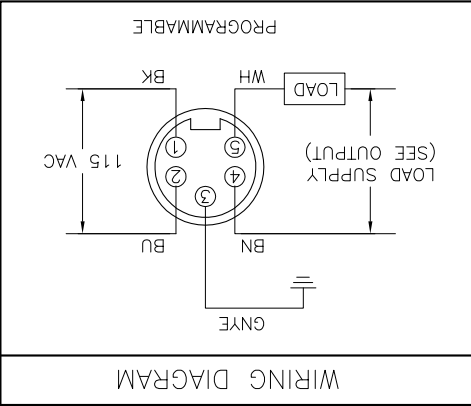

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [turck](#) manufacturer:

Other Similar products are found below :

[BI10-M30-AP6X-H1141](#) [BI2-G12-AZ33X-7M](#) [BS4151-0/13.5](#) [NI12U-G18-ADZ30X2-B1331](#) [NI12U-M18-AN4X](#) [BI1.5-G08K-AN6X](#) [BI5-G18-AZ3X](#) [BI5-G18-AZ3X-B1331-50MM](#) [VB20](#) [B 5143-0](#) [BI 2-EG08K-AP6X-V1131](#) [BMWS 8151-0/9](#) [BI30U-CK40-AP6X2-H1141](#) [NI12U-M18-AP6X-H1141](#) [NI4U-EG08-AN6X-H1341](#) [NI5-G12-AP6X-H1141](#) [NI14-G18-ADZ30X2](#) [BC10-QF5.5-RN6X2](#) [PKG 3M-4/S90](#) [B1N360V-Q20L60-2LU3-H1151](#) [FKFD 4.5](#) [RK40-2M](#) [BI5-G18-AP6X-B1441/S34](#) [RK 4T-10](#) [BI4-M12-AN6X-H1141](#) [NI3-EG08K-Y1-H1341](#) [BCF5-S18-RP4X/S90](#) [BI5-M18-Y0X-H1141](#) [NI35U-CK40-ADZ30X2-B3131](#) [W/BS4](#) [WK 4T-2](#) [IM1-22EX-T](#) [NI12U-MT18-AP4X-H1141](#) [BI1.5-EG08-AP6X-H1341](#) [BC 5-Q08-AP6X2-V1131](#) [BC5-S18-Y1X](#) [CT 2-A30/M](#) [C10-T13X/024VDC](#) [FDN20-4S-4XSG-E](#) [FKV-CC](#) [FSFD 8](#) [NI4U-EG08-RP6X-V1131](#) [CMBS 8141-0](#) [FEN20-16DXP](#) [BI10-M30-AN6X-H1141](#) [VB80-P7X9-8/CS12](#) [FKFD 8](#) [RI360P0-QR24M0-INCRX2-H1181](#) [PKW 3M-6](#) [NI8-M18E-VN4X](#) [WK 4.5T-2/S618](#)