



## ECO Halogen 80W LINEAR



### Product Overview

Main voltage halogen lamps operate direct from the mains, without the need for a transformer, and can be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

### Features

- More eco-valued.
- Excellent color rendering and consistency
- Reliable construction

### Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a glass product, handle with care

## Specifications – R7s

|                                |                  |
|--------------------------------|------------------|
| SKU                            | S5773            |
| Lamp                           | R7s              |
| Nominal Power (W)              | 80               |
| Voltage                        | 220-240Vac 50Hz  |
| Current (mA)                   |                  |
| Nominal Luminous Flux (lm)     | 1400             |
| CCT (K)                        | 2900K warm White |
| Nominal Lifetime (h)           | 2000             |
| Dimmable                       | Yes              |
| Switching Cycles               | 8000             |
| Warm-up time to 60% (S)        | instant          |
| Length (mm)                    | 78               |
| Diameter (mm)                  | 8                |
| Mercury (mg)                   | 0                |
| Clean-up instructions          | See website      |
| Retrofit Yes                   |                  |
| Equivalent Wattage (W)         | 100              |
| Rated Power (W)                | 80               |
| Rated Luminous Flux (lm)       | 1400             |
| Rated Lifetime (h)             | 2000             |
| Power Factor                   | 1                |
| Rated Peak Candelas (cd)       |                  |
| Lumen Maintenance Factor at    |                  |
| Nominal Lifetime               | 2000             |
| CRI                            | >99              |
| Start Time (s)                 | instant          |
| Ambient Temperature Range (°C) | -20 to 40        |

## Energy Label – R7s


|                                |             |
|--------------------------------|-------------|
| Energy Class                   | C           |
| Energy Consumption (kWh/1000h) | 80.00 (80)* |

\* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

## Product Markings – R7s


|                   |                 |
|-------------------|-----------------|
| Voltage           | 220-240Vac 50Hz |
| Nominal Power (W) | 80              |
| Current (mA)      |                 |
| CE Mark           | Yes             |
| WEEE Mark         | Yes             |
| Batch Code        | Yes             |

Dimensions

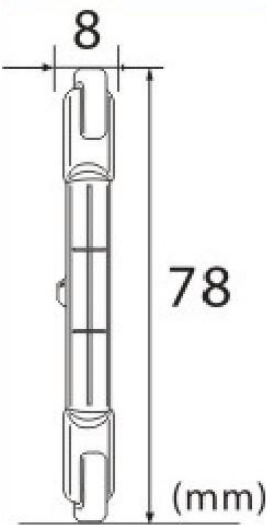

Photometric Information

2900K

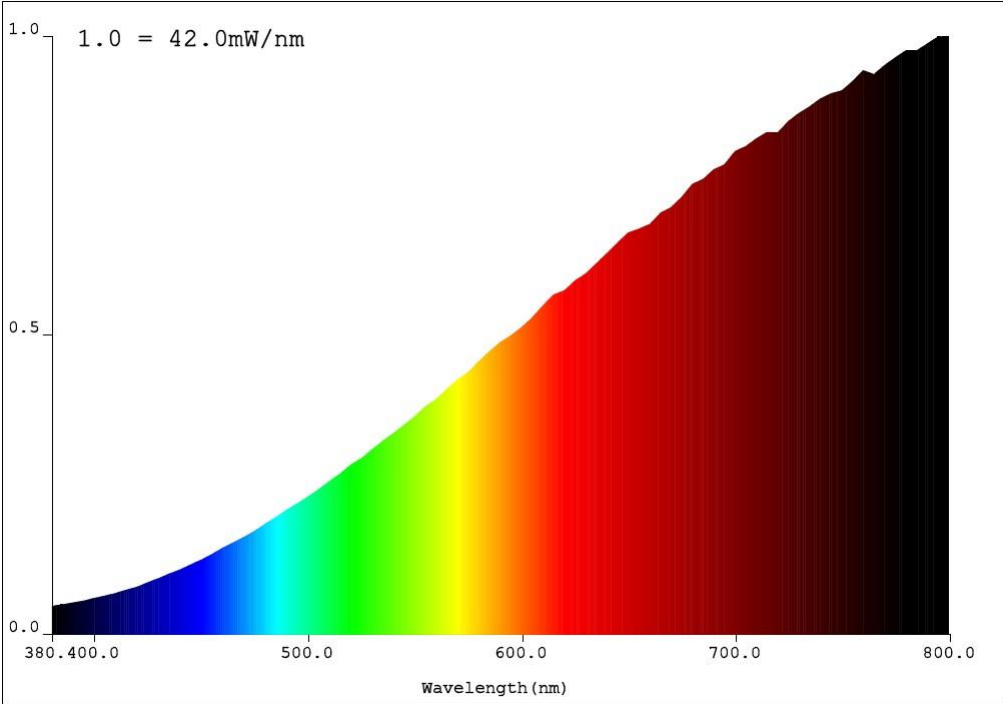

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [energizer manufacturer](#):*

Other Similar products are found below :

[1215F2X3](#) [LR43 186](#) [AC13](#) [AC312](#) [AC675](#) [603298](#) [638006](#) [639830](#) [E300132000](#) [S9025](#) [7638900414660](#) [HARD CASE RECHARGEABLE](#) [HARD CASE PRO MULTI USE](#) [HCHD311](#) [S9029](#) [639826](#) [603386](#) [HARD CASE PROFF 4AA](#) [HARDCASE PRO HEADLIGHT](#) [639618](#) [RCLINM2WR](#) [S8865](#) [S8707](#) [S8100](#) [7638900424478](#) [7638900313130](#) [626177](#) [E300116200](#) [E300115900](#) [E300280600](#) [639838](#) [HARDCASE PRO WORK LIGHT](#) [603305](#) [METAL LED 6AA](#) [S8864](#) [HDD32E](#) [MS2AALED](#) [ENERGIZER® 2-IN-1 LANTERN HANDHELD](#) [E300124200](#) [E300171700](#) [ENFFL81E](#) [E300112600](#) [633474](#) [HDA32E](#) [7638900421422](#) [HARD CASE PRO PIVOT](#) [HCSP61E](#) [7638900424485](#) [HDC32E](#) [E300115800](#)