DATA SHEET



LED Retrofit 11.6W E27,B22



Product Overview

LED retrofit lamps are direct replacements for conventional incandescent, halogen, and compact fluorescent (CFL) lamps. LEDs deliver higher lumens per watt (Im/W) which means significant energy savings while lasting more than ten times longer than incandescent sources. With their directional light, instant on and ability to dim, LEDs are fast becoming the light source of choice

Features

- Light even distribution.
- More eco-valued.
- Wider beam angle.

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

DATA SHEET

Specifications – E27,B22 Cap

| SKU | S8706,S8884 | S8864,S8883 |
|--------------------------------|--------------------|--------------------|
| Lamp Cap | E27 | B22 |
| Nominal Power (W) | 11.6 | 11.6 |
| Voltage | 220-240Vac 50-60Hz | 220-240Vac 50-60Hz |
| Current (mA) | 86 | 86 |
| Nominal Luminous Flux (Im) | 1060 | 1060 |
| CCT (K) | 2700K Warm white | 2700K Warm white |
| Nominal Lifetime (h) | 15000 | 15000 |
| Dimmable | No | No |
| Switching Cycles | 15000 | 15000 |
| Warm-up time to 60% (S) | 0.10 | 0.10 |
| Length (mm) | 120 | 118 |
| Diameter (mm) | 60 | 60 |
| Mercury (mg) | | |
| Clean-up instructions | See website | See website |
| Retrofit | Yes | Yes |
| Equivalent Wattage (W) | 75 | 75 |
| Rated Power (W) | 11.6 | 11.6 |
| Rated Luminous Flux (Im) | 1060 | 1060 |
| Rated Lifetime (h) | 15000 | 15000 |
| Power Factor | 0.50 | 0.50 |
| Rated Peak Candelas (cd) | 117 | 117 |
| Lumen Maintenance Factor at | | |
| Nominal Lifetime | 15000 | 15000 |
| CRI | 80 | 80 |
| Start Time (s) | 0.10 | 0.10 |
| Ambient Temperature Range (°C) | -20 to 40 | -20 to 40 |

Energy Label – E27,B22 Cap


| Energy Class | A+ | A+ | | |
|---|--------------|--------------|--|--|
| Energy Consumption (kWh/1000h) | 11.6 (11.6)* | 11.6 (11.6)* | | |
| * The kWh/1000h value published on the energy label is required to be rounded up to an integer according to | | | | |
| the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference. | | | | |


Product Markings – E27, B22 Cap

| Voltage | 220-240Vac 50-60Hz | 220-240Vac 50-60Hz |
|-------------------|--------------------|--------------------|
| Nominal Power (W) | 11.6 | 11.6 |
| Current (mA) | 86 | 86 |
| CE Mark | Yes | Yes |
| WEEE Mark | Yes | Yes |
| Batch Code | Yes | Yes |

DATA SHEET

Dimensions

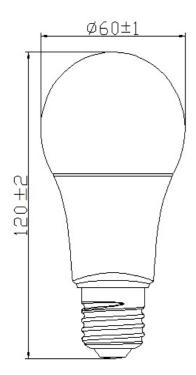


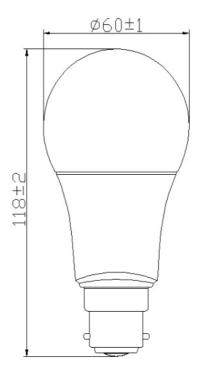

S8706,S8884

S8864,S8883

Photometric Information 2700K

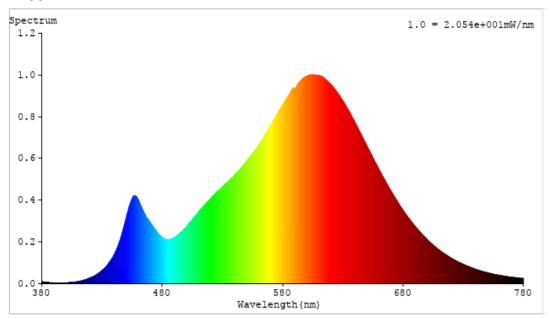

Page: 3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for energizer manufacturer:

Other Similar products are found below :

 1215F2X3
 LR43 186
 AC13
 AC312
 AC675
 603298
 638006
 639830
 E300132000
 S9025
 7638900414660
 HARD CASE

 RECHARGEABLE
 HARD CASE PRO MULTI USE
 HCHD311
 S9029
 639826
 603386
 HARD CASE PROFF 4AA
 HARDCASE PRO

 HEADLIGHT
 639618
 RCLINM2WR
 S8865
 S8707
 S8100
 7638900424478
 7638900313130
 626177
 E300116200
 E300115900

 E300280600
 639838
 HARDCASE PRO WORK LIGHT
 603305
 METAL LED 6AA
 S8864
 HDD32E
 MS2AALED
 ENERGIZER® 2-IN-1

 LANTERN HANDHELD
 E300124200
 E300171700
 ENFFL81E
 E300112600
 633474
 HDA32E
 7638900421422
 HARD CASE PRO

 PIVOT
 HCSP61E
 7638900424485
 HDC32E
 E300115800
 633474
 HDA32E
 7638900421422
 HARD CASE PRO