



# MASTER LEDcandle DiamondSpark

## MASTER LEDcandle DT 8-60W B40 E14 827 CL

Delivering incandescent-like sparkling light effects, MASTER LEDcandle bulbs are ideal for general and decorative lighting in the hospitality industry, as well as in home environments. The dimmable MASTER LEDcandles drive further efficiencies, while helping to create the desired atmosphere. Mounted in full view in chandeliers, wall scones or modern luminaires, the clear or frosted glass bulbs fit all existing fixtures with an E14 and B15 socket. Drawing upon inputs from chandelier makers and designed to enhance the aesthetic appeal of the chandelier or luminaire, not only when lit but also when not, these lamps come in a classical slender shape with a unique, eye-catching lens design. They produce a beautiful sparkling warm light that delivers huge energy savings and minimizes maintenance cost. The flame-shaped candle lamps comes in a classical slender shape with a unique, eye-catching lens design that perfectly complements modern LED candles.

### Product data

General Information		Operating and Electrical	
Cap base	E14 [ E14]	Luminous efficacy (rated) (nom.)	100.00 lm/W
Bulb shape	B40	Colour consistency	<6
Nominal lifetime (nom.)	25000 h	Color rendering index (nom.)	80
Switching cycle	50000X	LLMF at end of nominal lifetime (nom.)	70 %
Technical type	8-60W	Input frequency	50-60 Hz
Luminous flux (nom.)	806 lm	Power (Rated) (Nom)	8 W
Luminous flux (rated) (nom.)	806 lm	Lamp current (nom.)	45 mA
Colour designation	Warm white (WW)	Wattage equivalent	60 W
Correlated Color Temperature Setting(s)	2200-2700 K	Starting time (nom.)	0.5 s
		Warm-up time to 60% light (nom.)	0.5 s

# MASTER LEDcandle DiamondSpark

Power factor (nom.)	0.7
Voltage (Nom)	220-240 V

## Temperature

T-Case maximum (nom.)	95 °C
-----------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Bulb finish	Clear (CL)
-------------	------------

## Approval and Application


Energy-saving product	Yes
Suitable for accent lighting	No

Energy efficiency label (EEL)	A+
Energy Consumption kWh/1000 h	8 kWh

## Product Data

Full product code	871869655599600
Order product name	MASTER LEDcandle DT 8-60W B40 E14 827 CL
EAN/UPC – product	8718696555996
Order code	55599600
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001211702
Net weight (piece)	0.084 kg

## Dimensional drawing




Candle WG EMEA 60W E14 B40

Product	D	C
MASTER LEDcandle DT 8-60W B40 E14 827 CL	40 mm	127 mm

Photometric data

General Uniform Lighting

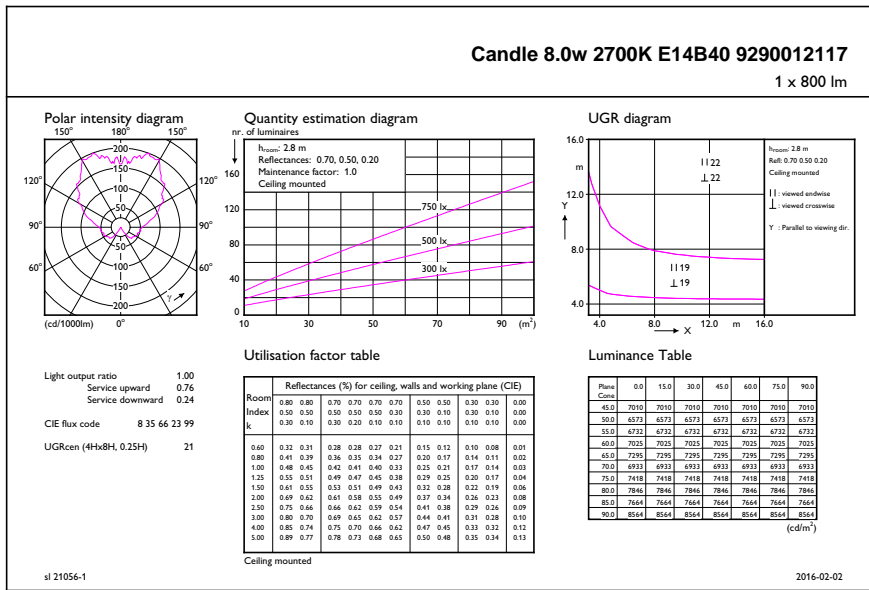

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [philips manufacturer](#):*

Other Similar products are found below :

[996510062046](#) [P80CL31HFP](#) [P87C528EBBB](#) [P87C528EBPN](#) [SCC68070CDA84](#) [PL22V1015N](#) [440206F](#) [451877AB](#) [569054R](#)  
[OM4151MAN](#) [P80C654FBP](#) [P87C528EBAA](#) [TDA2051H](#) [8718696522530](#) [8718696577790](#) [8718696598375](#) [DM4S6B00F/17](#) [45368100](#)  
[PLC18V8Z35FA](#) [P80C528FBA](#) [P80C550EBAA](#) [PLC42VA12FA](#) [PLC42VA12N](#) [PLS179N](#) [NE5081N](#) [P80C528FBP](#) [P80C575EBPN](#)  
[8718291787051](#) [45350600](#) [45362900](#) [996510053347](#) [22399](#) [2EMA00059B](#) [PCF80C65212WP](#) [PLS155N](#) [PLS173N](#) [BYV79200](#) [SAA5243](#)  
[PLS167N](#) [PLUS173DN](#) [PLUS20L87N](#) [PLUS20R87N](#) [053684A](#) [SCC2691AC1N24](#) [P80C575EBAA](#) [TDA4850](#) [UBA2051C](#) [8718696454831](#)  
[8718291787037](#) [929000863803](#)