

LEDVANCE® Linear

Indoor luminaires | LED surface-mounted luminaire



Area of application

- General indoor illumination
- Corridors, entrance lighting
- Accent lighting, public areas
- Cove lighting
- Shelves, furniture integration or under cabinet lighting
- Seamless linear lighting


Product benefits

- Compact dimensions
- Easy to install in two different mounting angles
- Energy savings of up to 45% compared to conventional linear luminaires
- Complete mounting and connecting accessories included
- Connect up to 10 luminaires in series
- On/off switch on luminaire
- Different lengths available
- For seamless lines of light
- Available certificates: CE, CB, TUEV SUED

Product features

- Luminaire efficacy: up to 100 lm/W
- Luminous flux: up to 1450lm
- Available with color temperature: 3000K, 4000K
- Beam angle: 140°
- Type of protection: IP20
- White polycarbonate housing and diffuser
- Ambient operating temperature: -20...+40 °C
- Lifetime (L70/B50): up to 30000h
- 3-years guarantee

Technical data

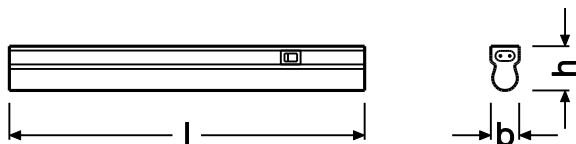

Product description	GTIN (EAN)	Nominal wattage [W]	Nominal voltage [V]	Power factor [λ]	Luminous flux [lm]	Luminaire efficacy [lm/W]	Colour temperature [K]	CRI index [Ra]
Linear LED 300 4W/3000K 230V IP20	4058075000247	4W	230V	> 0.5	400	100	3000K	>80
Linear LED 300 4W/4000K 230V IP20	4058075000261	4W	230V	> 0.5	450	110	4000K	>80
Linear LED 600 8W/3000K 230V IP20	4058075000285	8W	230V	> 0.5	800	100	3000K	>80
Linear LED 600 8W/4000K 230V IP20	4058075000308	8W	230V	> 0.5	800	100	4000K	>80
Linear LED 1200 14W/3000K 230V IP20	4058075000322	14W	230V	> 0.5	1400	100	3000K	>80
Linear LED 1200 14W/4000K 230V IP20	4058075000346	14W	230V	> 0.5	1500	100	4000K	>80

Product description	Beam angle	Rated life time L70 / B50 [h]	Type of protection IP rating	Protection class	Product size l x w or ø [mm]	Height h [mm]	Body colour
Linear LED 300 4W/3000K 230V IP20	140°	30000	20	II	313 x 28	36	white
Linear LED 300 4W/4000K 230V IP20	140°	30000	20	II	313 x 28	36	white
Linear LED 600 8W/3000K 230V IP20	140°	30000	20	II	573 x 28	36	white
Linear LED 600 8W/4000K 230V IP20	140°	30000	20	II	573 x 28	36	white
Linear LED 1200 14W/3000K 230V IP20	140°	30000	20	II	1173 x 28	36	white
Linear LED 1200 14W/4000K 230V IP20	140°	30000	20	II	1173 x 28	36	white

Packaging information

Product description	GTIN (EAN)	Dimensions EAN10 l x w x h [mm]	Gross weight EAN 10 [g]	Volume [dm ³]	Packaging unit [Pieces/unit]
Linear LED 300 4W/3000K 230V IP20	4058075000247	520 x 40 x 30	183	0.94	25
Linear LED 300 4W/4000K 230V IP20	4058075000261	520 x 40 x 30	183	0.94	25
Linear LED 600 8W/3000K 230V IP20	4058075000285	780 x 40 x 30	385	1.37	25
Linear LED 600 8W/4000K 230V IP20	4058075000308	780 x 40 x 30	385	1.37	25
Linear LED 1200 14W/3000K 230V IP20	4058075000322	1380 x 40 x 30	558	2.38	25
Linear LED 1200 14W/4000K 230V IP20	4058075000346	1380 x 40 x 30	558	2.38	25

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [osram](#) manufacturer:

Other Similar products are found below :

[LO L296-Q2S1-24-Z](#) [IPD2131-27](#) [GW PSLPS1.EC-KSKU-5R8T-1](#) [418962A](#) [BPW 34 FS](#) [LCW JNSH.PC-CPCR-5H7I-1](#) [LE RTDUW S2W](#)
[LT A67C-S2U1-35](#) [LG Y876-P1Q2-24-Z](#) [BPW 34 FASR](#) [BPW 34 FSR](#) [BPW 34 SR](#) [LT A67C-T2V1-35](#) [GY CSHPM1.23-KQKS-36-0](#) [KW](#)
[H5L531.TE-Z7R7-EBVFFCBB46-RS5R](#) [4058075097421](#) [79675](#) [79632](#) [OT 40/220-240/24 DIM P](#) [OT 60/220-240/24 DIM P](#) [OT 100/220-](#)
[240/24 DIM P](#) [OT FIT 45/220-240/200 D L](#) [KW2 HIL532.TK-D2D9-4L07M0-SC6B](#) [LW TWTG.BB-BXCX-2B2C-1](#) [LA E6SF-BBCB-24-1-Z](#)
[HDSP2112S](#) [LY E6SF-AABA-46-1-Z](#) [64760](#) [SFH 4715A-CBDA](#) [4058075097360](#) [4058075097544](#) [47659](#) [OT 6/200-240/24 CE](#) [OT FIT](#)
[35/220-240/350 D CS L](#) [OT FIT 8/220-240/180 CS S MINI](#) [64150ULT](#) [79366](#) [4052899917583](#) [4058075819658](#) [GW CSSRM2.PM-N3N5-](#)
[XX51-1](#) [LE B Q8WP-8A7B-24](#) [ELEMENT 90/220-240/24](#) [OT 40/220-240/24 P](#) [OT 60/220-240/24 P](#) [ELEMENT 6/220-240/150 S](#) [64210CBI](#)
[LY E67F-ABBB-46-1-Z](#) [LS T670-J1K2-1-Z](#) [LO L29K-H2L1-24-Z](#) [LY E67B-T2V1-26-1-Z](#)