


6.0V 2.5F (1020) 2 SERIAL MODULE




FEATURES

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- 2 units serially connected to provide 6.0V products
- RoHS compliant
- Long-term reliability improved at high temperature and humidity(65°C 90%RH)



Drawing

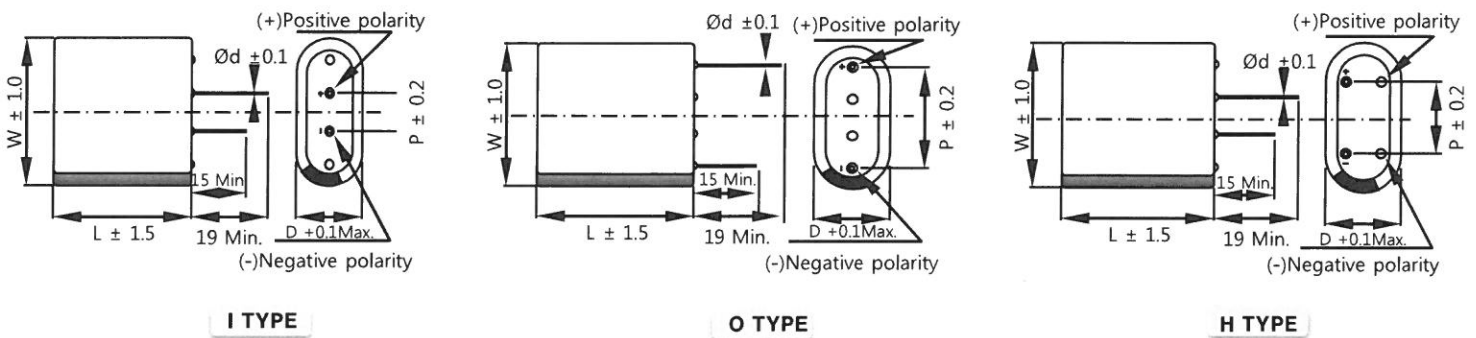

D = 10.5mm

TYPE	I	O	H
P	5.5	15.5	10.5

(Unit : mm)

SPECIFICATION

ITEM	CHARACTERISTICS	
Product series	EDLC 2SERIAL MODULE	
Rated Voltage (V_R)	6.0V	
Operating Temperature	-40 ~ +65°C	
Capacitance Tolerance	-10 ~ +30%	
High Temperature Load Life	After 1,000 hours at V_R loaded under +65°C, capacitors meet the following criteria.	
	Capacitance Change	≤ 30% of initial value
	ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000
	ΔC	≤ 30% of initial value
	ESR	≤ 2 times of specified value
	Method	Cycle of Charge/discharge from V_R to $1/2V_R$
Shelf Life	2 Years	
	No Electrical Charge, Temperature below 70°C (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of specified value)	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (μA, 72hr)	Size (mm) D x L x L
			AC(1kHz)	DC			
WEC6R0255QG	6.0	2.5	165	245	4.5	0.015	10.5x21x22.5

* Max. Current : 1 sec. discharge to $1/2V_R$

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vinatech](#) manufacturer:

Other Similar products are found below :

[WEC3R0 156QG](#) [VEC3R0 256QG](#) [VEC3R0 105QG](#) [VEC3R0 507QG](#) [VLCRS3R8206MG](#)