


Twisted/Shielded Thermocouple Wire

- ✓ Maintains Electrical Ground from Probe Sheath to Instrument
- ✓ Polyvinyl, FEP, and PFA Insulations Available
- ✓ Complements OMEGA® Low Noise Thermocouple Probes and Connectors
- ✓ Extension and Thermocouple Grades
- ✓ Custom Wire Design Available
- ✓ 7.5 to 300 m (25 to 1000') Spools Available from Stock

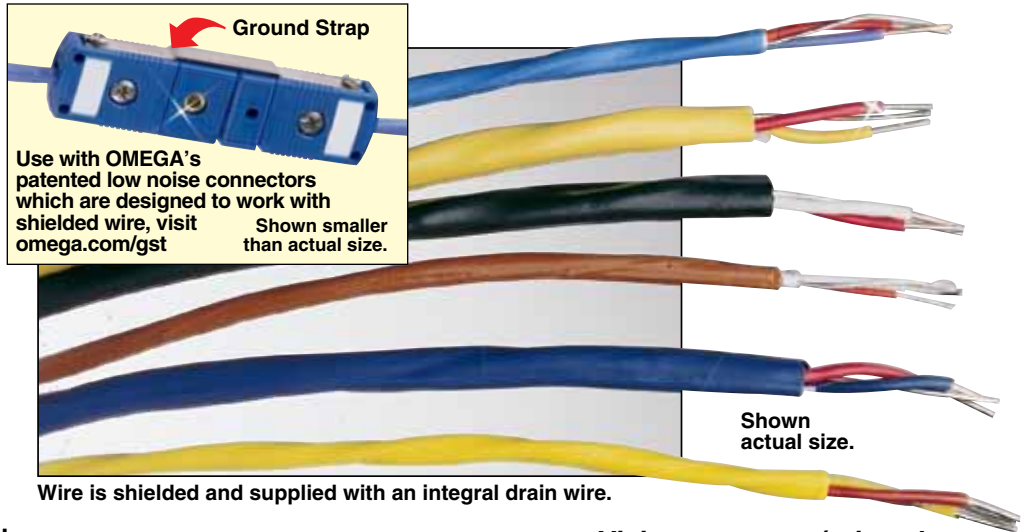

Thermocouple Grade PFA Insulation

AWG†	Model Number ANSI Color Code	Nominal Size mm (inch)	Thermocouple Type
20	TT-J-20-TWSH	3.7 (0.15)	J
	TT-K-20-TWSH	3.7 (0.15)	K
	TT-T-20-TWSH	3.7 (0.15)	T
	TT-E-20-TWSH	3.7 (0.15)	E
20S*	TT-J-20S-TWSH	3.8 (0.15)	J
	TT-K-20S-TWSH	3.8 (0.15)	K
	TT-T-20S-TWSH	3.8 (0.15)	T
	TT-E-20S-TWSH	3.8 (0.15)	E
24	TT-J-24-TWSH	2.7 (0.11)	J
	TT-K-24-TWSH	2.7 (0.11)	K
	TT-T-24-TWSH	2.7 (0.11)	T
	TT-E-24-TWSH	2.7 (0.11)	E
24S*	TT-J-24S-TWSH	2.9 (0.12)	J
	TT-K-24S-TWSH	2.9 (0.12)	K
	TT-T-24S-TWSH	2.9 (0.12)	T
	TT-E-24S-TWSH	2.9 (0.12)	E

Thermocouple Grade FEP Insulation

Visit omega.com/tt-j-twsh for Pricing and Details

AWG†	Model Number ANSI Color Code	Nominal Size mm (inch)	Thermocouple Type
20	FF-J-20-TWSH	3.7 (0.15)	J
	FF-K-20-TWSH	3.7 (0.15)	K
	FF-T-20-TWSH	3.7 (0.15)	T
	FF-E-20-TWSH	3.7 (0.15)	E
20S*	FF-J-20S-TWSH	3.8 (0.15)	J
	FF-K-20S-TWSH	3.8 (0.15)	K
	FF-T-20S-TWSH	3.8 (0.15)	T
	FF-E-20S-TWSH	3.8 (0.15)	E
24	FF-J-24-TWSH	2.7 (0.11)	J
	FF-K-24-TWSH	2.7 (0.11)	K
	FF-T-24-TWSH	2.7 (0.11)	T
	FF-E-24-TWSH	2.7 (0.11)	E
24S*	FF-J-24S-TWSH	2.9 (0.12)	J
	FF-K-24S-TWSH	2.9 (0.12)	K
	FF-T-24S-TWSH	2.9 (0.12)	T
	FF-E-24S-TWSH	2.9 (0.12)	E

Extension Grade Polyvinyl Insulation

AWG†	Model Number ANSI Color Code	Nominal Size mm (inch)	Thermocouple Type
16	EXPP-J-16-TWSH	6.4 (0.250)	J
	EXPP-K-16-TWSH	6.4 (0.250)	K
	EXPP-T-16-TWSH	6.4 (0.250)	T
	EXPP-E-16-TWSH	6.4 (0.250)	E
16S*	EXPP-J-16S-TWSH	6.9 (0.270)	J
	EXPP-K-16S-TWSH	6.9 (0.270)	K
	EXPP-T-16S-TWSH	6.9 (0.270)	T
	EXPP-E-16S-TWSH	6.9 (0.270)	E
20	EXPP-J-20-TWSH	5.1 (0.200)	J
	EXPP-K-20-TWSH	5.1 (0.200)	K
	EXPP-T-20-TWSH	5.1 (0.200)	T
	EXPP-E-20-TWSH	5.1 (0.200)	E
20S*	EXPP-J-20S-TWSH	5.5 (0.215)	J
	EXPP-K-20S-TWSH	5.5 (0.215)	K
	EXPP-T-20S-TWSH	5.5 (0.215)	T
	EXPP-E-20S-TWSH	5.5 (0.215)	E

* Stranded wire. † Please visit omega.com/colorcodes for AWG dimensions. Extension grade wire also available in R and S calibrations. Consult Sales Department for pricing information.

Note: Minimum bending radius is 4 times the nominal diameter.

Note: Published prices are based on market value at time of printing and are subject to change due to Nickel surcharges, Chromium and precious-metal market fluctuations.

PFA insulation also available. Change "FF" in Model Number to "TT" Example: EXTT-J-16-TWSH Consult Sales for pricing.

Extension Grade FEP Insulation

AWG†	Model Number ANSI Color Code	Nominal Size mm (inch)	Thermocouple Type
16	EXFF-J-16-TWSH	4.3 (0.17)	J
	EXFF-K-16-TWSH	4.3 (0.17)	K
	EXFF-T-16-TWSH	4.3 (0.17)	T
	EXFF-E-16-TWSH	4.3 (0.17)	E
16S*	EXFF-J-16S-TWSH	4.5 (0.18)	J
	EXFF-K-16S-TWSH	4.5 (0.18)	K
	EXFF-T-16S-TWSH	4.5 (0.18)	T
	EXFF-E-16S-TWSH	4.5 (0.18)	E
20	EXFF-J-20-TWSH	3.7 (0.15)	J
	EXFF-K-20-TWSH	3.7 (0.15)	K
	EXFF-T-20-TWSH	3.7 (0.15)	T
	EXFF-E-20-TWSH	3.7 (0.15)	E
20S*	EXFF-J-20S-TWSH	3.8 (0.15)	J
	EXFF-K-20S-TWSH	3.8 (0.15)	K
	EXFF-T-20S-TWSH	3.8 (0.15)	T
	EXFF-E-20S-TWSH	3.8 (0.15)	E

†† To order special limits of error wire, add "-SLE" to model number before spool length. **Ordering Example:** FF-K-20S-TWSH-SLE-1000, 1000' of 20 gage twisted/shielded Type K Neoflon coated wire.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [omega manufacturer](#):

Other Similar products are found below :

[PX309-5KGI](#) [SMPW-J-M](#) [5SC-TT-T-36-36](#) [5SRTC-TT-K-30-72](#) [MJP2-12-T](#) [CASS-116U-12](#) [CHAL-002](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#)
[HPC-AU-P](#) [HPC-IR-P](#) [KHSS-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-](#)
[18G-12](#) [NB3-CAXL-14U-18](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GV](#) [PX319-V050G5V](#) [PX319-V100G5V](#) [PX319-002GI](#) [PX319-](#)
[050GI](#) [PX319-100GV](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#)
[PX329-10KGI](#) [PX329-2KGI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-1.0KGUSBH](#) [PX409-10WVI](#) [PX409-100A5V](#)
[PX409-5.0KG5V](#) [PX409-500GUSBH](#) [PX41T0-300GI](#) [PX419-250GI](#) [P10R-005](#) [SA1-RTD-4W-120](#) [SA1-T-72-SRTC](#) [SA1XL-K-SRTC](#)