

General tolerance ±0,05

### **Pattern Properties:**

•		
Properties		Value
Pin to Pin (Middle)	pı	2

Properties		Value	Unit
Pins		4	
Pin to Pin (Middle)	P <sub>I</sub>	2	mm
Length	L	4	mm

The value L1 does not apply for this part number.

GENERAL TOLERANCE CHECKED Würth Elektronik eiSos GmbH & Co. KG DaMa GM DIN ISO 2768-1m EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg 2.00mm SMT Angled Dual Pin Germany Tel. +49 (0) 79 42 945 - 0 **Header WR-PHD** ORDER CODE www.we-online.com 621304284521 eiSos@we-online.com DATE (YYYY-MM-DD) BUSINESS UN REVISION STATUS 001.000 Valid 2017-11-01 WÜRTH ELEKTRONIK

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co KG products are neither designed nor intended for use in areas such as a military, aerospace, existion, nuclear control, strain control, train control, train control, ship control, ship control, train control, ship control, trai

6	4 mm	6 mm	2 mm	621306284521
8	6 mm	8 mm	4 mm	621308284521
10	8 mm	10 mm	6 mm	621310284521
12	10 mm	12 mm	8 mm	621312284521
14	12 mm	14 mm	10 mm	621314284521
16	14 mm	16 mm	12 mm	621316284521
20	18 mm	20 mm	16 mm	621320284521
24	22 mm	24 mm	20 mm	621324284521
28	26 mm	28 mm	24 mm	621328284521
32	30 mm	32 mm	28 mm	621332284521
40	38 mm	40 mm	36 mm	621340284521
44	42 mm	44 mm	40 mm	621344284521

# **Kind Properties:**

Properties		Value	Unit	Tol.		
Standard Polarities 1)		04;06;08;10;12;14;16;20				
Pitch	Р	2				
Quality Class		50 Cycles				
Coplanarity		100		max.		

<sup>1)</sup> Delivery ex stock for standard polarities, non standard have extended leadtimes and MOQ

# **Material Properties:**

Insulator Material	PA9T
Insulator Flammability Rating	UL94 V-0
Insulator Color	Black
Contact Material	Copper Alloy
Contact Plating	Gold

Operating Temperature	-40 °C up to +105 °C
Compliance	Lead free / RoHS

# **Electrical Properties:**

Properties	Test conditions		Value
Rated Current		I <sub>R</sub>	2
Working Voltage			200
Withstanding Voltage	1 min		500
Contact Resistance		R	20
Insulation Resistance		R <sub>ISO</sub>	1000

### Standard:


III. A	F000004
UL Approval	E323964

## **Packaging Properties:**

Packaging	Tape and Reel with Pad

GENERAL TOLERANCE CHECKED Würth Elektronik eiSos GmbH & Co. KG DaMa GM DIN ISO 2768-1m EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg 2.00mm SMT Angled Dual Pin Germany Tel. +49 (0) 79 42 945 - 0 **Header WR-PHD** www.we-online.com 621304284521 eiSos@we-online.com DATE (YYYY-MM-DD) BUSINESS UN REVISION STATUS 001.000 Valid 2017-11-01 WÜRTH ELEKTRONIK

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Wiirth Elektronik etSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability functions or performance.

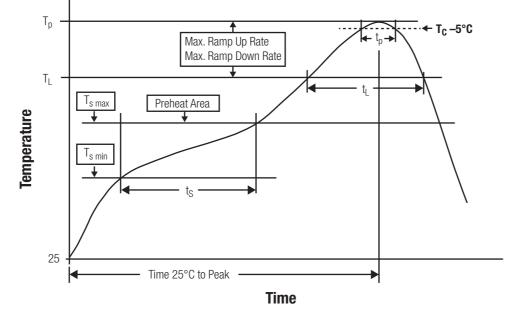


Preheat Temperature Max	T <sub>s max</sub>	200 °C			
Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$	t <sub>s</sub>	60 - 120 seconds			
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.			
Liquidous Temperature	T <sub>L</sub>	T <sub>L</sub> 217 °C			
Time t <sub>L</sub> maintained above T <sub>L</sub>	t <sub>L</sub>	60 - 150 seconds			
Peak package body temperature	Tp	see table			
Time within 5°C of actual peak temperaure	t <sub>p</sub>	20 - 30 seconds			
Ramp-down Rate (T <sub>L</sub> to T <sub>P</sub> )		6 °C/ second max.			
Time 25°C to peak temperature		8 minutes max.			

<sup>&</sup>lt;sup>1)</sup> refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

# **Package Classification Reflow Temperature:**

Properties	Volume mm³ <350	Volume mm <sup>3</sup> 350-2000	>
PB-Free Assembly I Package Thickness < 1.6 mm <sup>1)</sup>	260 °C	260 °C	2
PB-Free Assembly   Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	2
PB-Free Assembly   Package Thickness ≥ 2.5 mm	250 °C	245 °C	2

1) refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

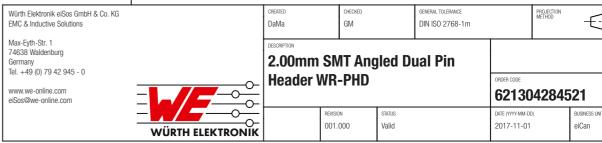

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control), transportation signal, disaster prevention, medical, public information network etc.. Worth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability functions or performance.

\_\_\_\_\_\_

#### General:

- · This electronic component is designed and developed with the intention for use in general electronics equipment
- Before incorporating the components into any equipment in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.
- In addition, even electronic component in general electronic equipment, when used in electrical circuits that require high safety,
   reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed by the user before usage.
- The connector is designed and manufactured to be used within the datasheet specified values.
- Do not use the connector outside the datasheet specifications.
- Prevent any damage or scratches on the connector, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specification for standard products do also apply to customer specific products.
- The Connectors are designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot insure the
  reliability of these components while being used with other products.

#### **Product Specific:**

#### Soldering:

- The solder profile must comply with the WE technical soldering specification, otherwise this will void the warranty.
- Other soldering methods are not verified and have to be validated by the customer at his own risk.

#### Cleaning and Washing:

- Parts are not constructed for washing, so washing can cause malfunction afterwards.
- Cleaning agent that are used to clean the customer applications might damage or change the characteristics of the component, body, pins and termination
- Please do not submerse our washable products into water or cleaning agents or put them in locations exposed to water completely.
- When cleaning by hand (brushing), please do not use excessive force on our connectors to avoid malfunction afterwards, because customer could deform function relevant areas.
- We recommended a solution without organic acid (preserve the plating against corrosion) volatile, without residues and compatible with the plastic.

sensivity but all products shall be used before the end of the period of 12 months based on the products date code solderability can't be warranted.

#### Handling:

- . Do not repeatedly operate the connector with excessive force. It may damage or deforms the contact dome which it
- In the case a product requires particular handling precautions, in addition to the general recommendations mention
  will appear on the product datasheet.

Max-Eyth-Str. 1 74638 Waldenburg Germany Tal ±40 (0) 79 42 945 - 0		CREATED DaMa			GENERAL TOLERANCE DIN ISO 2768-1m	METHOD		-
		2.00mm SMT Angled Dual Pin						
		Header W	/R-PHD			ORDER CODE 62130	)42845	521
	WÜRTH ELEKTRONIK	1	REVISION 001.000	status Valid		DATE (YYYY-MM-D 2017-11-01	'	BUSINESS UNI eiCan

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co Kg products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co Kg products are neither designed nor intended for use in areas such as a military, aerospace, aviation, nuclear control, standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. As on the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. As on the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. As on the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. As on the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. As on the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such as a such as a

-----

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the availability expectancy before or when the product for application design-in disposal is considered. The approach name apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, develor well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will Elektronik eiSos GmbH & Co. KG does not warrant or represent that any licens implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Elektronik eiSos Group", last version available at www.we-online.com.

Wurth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	DaMa GM		DIN ISO 2768-1m		METHOD	+	
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	2.00mm SMT Angled Dual Pin						
www.we-online.com	Header WR-PHD				621304284521		
WÜRTH ELEKTRONIK	1	REVISION 001.000	status Valid		DATE (YYYY-MM-DD 2017-11-01		BUSINESS UN eiCan

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreo & Co Kg products are neither designed nor intended for use in areas such as military, aerospace, evadion, nuclear control, strain control, ship control, train control, ship control, ship control, ship control, train control, ship c

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for wurth manufacturer:

Other Similar products are found below:

687001 742700 74270062 74437349220 744741101 750314624 750341638 31402 686626050001 744741471 744772681 744777

749119950 750312504 890334025009 IC-744885 875115350002 865230143004 600690282801 178050601 615008138221 750311898

744999 7446823003 7446323004 744028 66201621822 7446221012 744720 760895431 760895651 662006236022 64900621822

418117270910 890334026014 744839208072 744762A/RFI 74651174R 744838180160 750310346 861011384014 750817018 3020903

885342 2603019321001 2603019021001 2606039021001 2608019324001 2607019213001 2605039241001