


## Dual Wall Tubing (4X)

Flame Retardant, High Shrink Ratio, Adhesive Lined, Semi-Rigid, Polyolefin, Heat Shrink

pro-POWER

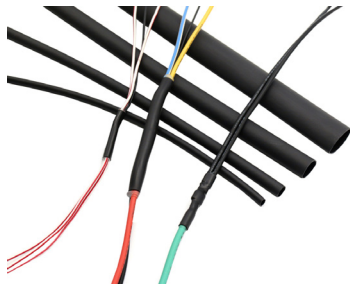

RoHS  
Compliant

### Description

Flame-retardant and mechanically tough, the tubing provides strain relief and abrasion protection of wire splices, terminals and other components. High shrink ratio allows a few sizes to cover a wide range of splice and component diameters. Thick adhesive liner forms an effective barrier against fluids and moisture.

### Specifications

Operating temperature	: -45°C to +125°C
Minimum Full Recovery Temperature	: 125°C
Minimum shrink temperature	: 70°C
Shrink Ratio	: 4:1
Colour	: Black
Approvals	: UL224, 125°C 600V VW-1

### Technical Data

Property	Test Method	Typical Data
Tensile Strength	ASTM D 2671	≥14MPa
Ultimate Elongation	ASTM D 2671	≥200%
Longitudinal Shrinkage	UL 224	≤±10%
Heat shock	250°C, 4hrs	No cracking
Flammability	VW-1	Pass (out jacket only)
Dielectric Strength	IEC 243	20kv/mm
Volume Resistivity	UL224	1x10 <sup>14</sup> Ω·Cm
Copper Stability	ASTM D 2671	Pass
Corrosion	UL224	No corrosion

### Hot Melting Adhesive Property

Test Item	Test Method	Typical Result
Water absorption Ratio	ASTM-D570	<0.2%
Softening point	ASTM-E28	95°C
Peel Strength(PE)	ASTM-D1000	120N/25mm
Peel Strength(AL)	ASTM-D1000	80N/25mm

# Dual Wall Tubing (4X)

Flame Retardant, High Shrink Ratio, Adhesive Lined, Semi-Rigid, Polyolefin, Heat Shrink



## Product Dimensions

Part Number	Size		As supplied	After recovery(mm)		
	Inch	mm	Internal Diameter(mm)	Internal Diameter	Total Wall Thickness	Adhesive thickness
PP001983	5/32	4	4	0.95	1.2 ±0.2	0.5 ±0.2
PP001984	1/4	6	6	1.27	1.26 ±0.3	0.5 ±0.3
PP001985	5/16	8	8	1.65	1.7 ±0.3	0.75 ±0.3
PP001981	1/2	12	12	2.41	2.1 ±0.3	0.95 ±0.3
PP001982	3/4	18	18	4.45	2.6 ±0.3	1.3 ±0.3

## Part Number Table

Description	Part Number
Tubing, Heat Shrink, Dual Wall, Adhesive Lined, 4:1, 12mm, Black, 1.22m	PP001981
Tubing, Heat Shrink, Dual Wall, Adhesive Lined, 4:1, 18mm, Black, 1.22m	PP001982
Tubing, Heat Shrink, Dual Wall, Adhesive Lined, 4:1, 4mm, Black, 1.22m	PP001983
Tubing, Heat Shrink, Dual Wall, Adhesive Lined, 4:1, 6mm, Black, 1.22m	PP001984
Tubing, Heat Shrink, Dual Wall, Adhesive Lined, 4:1, 8mm, Black, 1.22m	PP001985

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.

# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Pro Power manufacturer](#).*

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)