Sawing

Hacksaw frame




Workshop hacksaw frame 603E


OPTIMUM BLADE USAGE



Blade rotation through 360° without removal.



Spring pre-tensioning for easy blade fitting and adjustment.



Machined and shouldered pins for secure blade retention.



45° cutting angle increments.



Hacksaw frame

603E

DIN 6473, NF E 73-073.

- Tension: in excess of 100 kg; 20, 000 PSI.
- Metal bow takes 300 mm blade
- 429 x 137 mm.

∆™ : 760 g.









"Travelling" hacksaw frame 601

PRACTICAL AND COMPACT



Minimum clearance to start cutting.



2 blade positions on machined and shouldered pins.



Left-hand rest.



Compact: stored in a 5-compartment box and in roller-cabinet modules.





Sawing

Hacksaw frame

601

- Impact-resistant steel/resin construction.
- Blade tension 80 kg
- 385 x 145 mm.

∆1∆ : 590 q.





the same of the sa

Saw, tape measure and files module

MOD.601

- Comprising :
- 601 : Hacksaw frame
- 660A.10: 10 hacksaw blades.
- 234.S : Scriber
- 803-300M : Rule.
- 5 files with handle: PAM.B300EM; DRD.MD250EM; CAR. MD200EM; TRI.MD200EM; RD.M200EM.
- 1712 : Tape measure.
- Tray PL.335 (complete drawer).

∆1∆ : 2.3 kg.



Straight frame with blade backing

606A

• Blade can be set to protrude beyond the backing to allow insertion into narrow gaps.

∆∆ : 410 g.




Revolver frame with sliding blade-guide

605.B

- Sliding guide steadies blade throughout cutting stroke.
- A thumbscrew can lock the guide to keep blade end clear.
- Takes 300 mm blade.

∆∆ : 780 g.

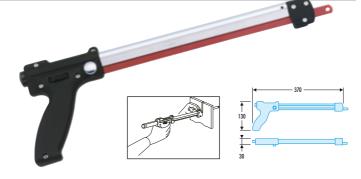


Hacksaw frame

599

▶ NF E 73-073, DIN 6473.

- Flat bow.
- Wood handle.
- Takes 300 mm blade.

∆∆ : 600 g.

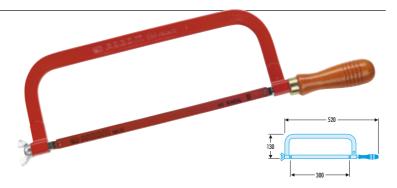





































X-ON Electronics

Authorized Distributor

Click to view similar products for Facom manufacturer.

Other Similar products are found below:

<u>VE3PB AMR ANX30X125 AP3X150VE AEJ1 AEFJ2 AWHH3X75 A402J2</u>
<u>A35X100VE 985753 7519 A55X150VE R360NANO R217 427MT 89SJP8 405E</u>
40512E ANJ4PB AR55X150 R32 AND1X100 AEFJ1 758 251A25