
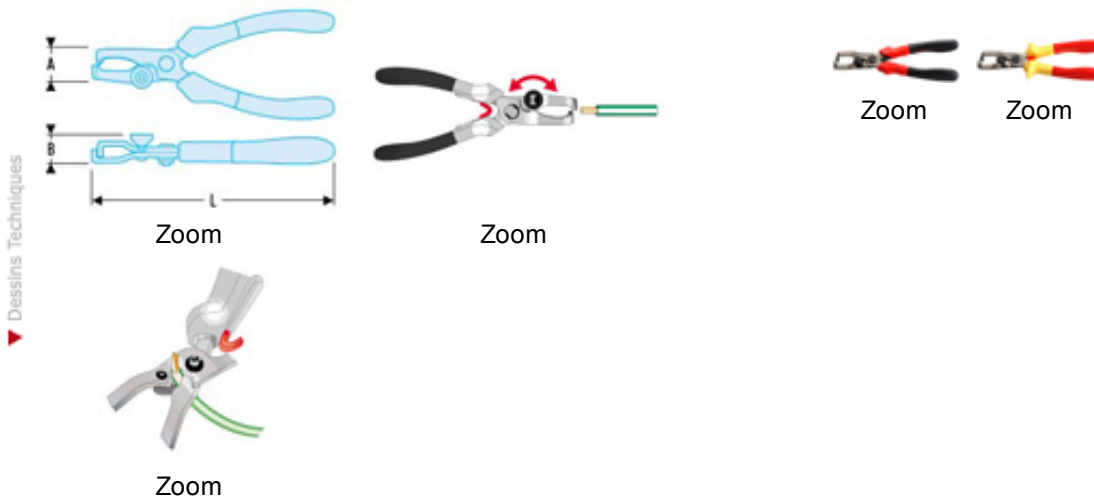






- For wire 0.5 to 6 mm².
- Wire diameter presetting.
- Long stripping length.
- Integral wire-cutter.
- Hinge adjusting screw.
- 3 options
- CPE Chrome finish, ergonomic grips, return spring;
- TE Varnished finish, ergonomic grips, return spring;
- VE Varnished finish, return spring, 1000V insulated grips for electrical safety to EN 60900 and , for working on or near live components.



▼ Données Techniques

		L	A	B	
	mm ²	mm	mm	mm	g
194.17CPE	0,5 - 6	195	17	16	160
194.17TE	0,5 - 6	195	17	16	160
194.17VE	0,5 - 6	195	17	16	165

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [facom](#) manufacturer:

Other Similar products are found below :

[92A.5,5](#) [ARB.5.5X40](#) [ANXR10X75](#) [AEF.J6](#) [AEF.J1](#) [EH.107](#) [256.2.5](#) [MT.J3](#) [986058](#) [75.10](#) [84E.J1](#) [455B](#) [440.19](#) [44.6X7](#) [440.21](#) [R.306-25D](#) [R.217](#) [R.5](#) [J.13LA](#) [431.LE](#) [425.E](#) [R.216](#) [601](#) [AEF.1,5X35](#) [AEX.9X75](#) [AEX.7X35](#) [EH.103](#) [EH.102](#) [251A.2.5](#) [HB.2B](#) [75.7](#) [440.20](#) [435.E](#) [432.LMT](#) [44.12X13](#) [440.5H](#) [440.22](#) [R.304DA](#) [427.MT](#) [251A.3](#) [AEF.1,8X35](#) [440.30](#) [440.18](#) [440.8](#) [R.4](#) [J.19LA](#) [44.JE8](#) [417.PE](#) [416.PE](#) [S.208](#)