


Terminals

L1001/1 Terminal

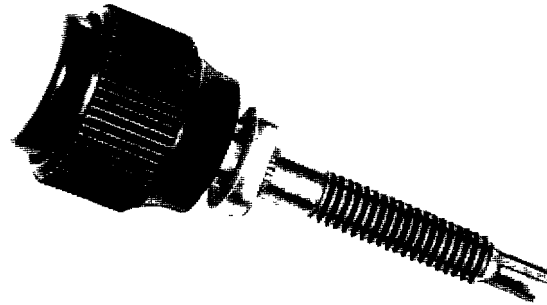

This terminal incorporates a non-rotating centre disc in the head for lettering. The rotating collar is captive and the clamping gap is free from thread.

When used with Panel fittings 01 this terminal is panel sealed.

Current rating: ___ 15 A

Temperature

range: _____ -25 °C to + 70 °C

Materials: _____ Head, phenolic resin
Disc, tenite butyrate
Stem, brass, nickel-plated

Colours head: ___ Black
disc Black, red


Ordering reference:

L1001/1/Colour

Fixing Kit 3

Panel fittings (see below and opposite)

(Terminals and fittings are supplied unassembled and must be ordered as individual items.)

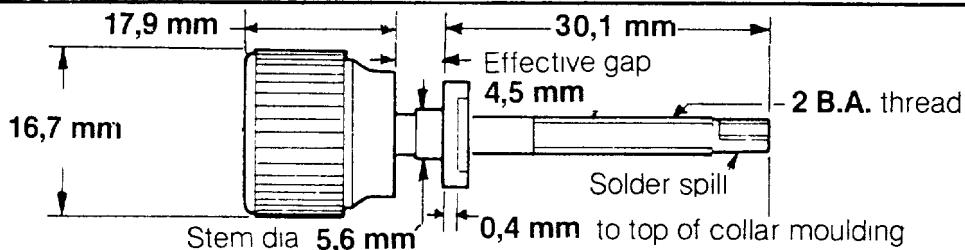

Fixing kit 3

Comprises: _____

Metal washer
Non-rotating washer
2 locknuts (2 BA)

427-329.

B panel fittings

Comprises: _____ Phenolic resin
moulding SRBP
insulating washer

Fixing torque: ___ 1,41 Nm

Colour: _____ Black

Breakdown


voltage: _____ 3 kVd c

Insulation

resistance: _____ $\geq 10^9$ megohms

Temperature

range: _____ -40 °C to + 85 °C
(ambient)

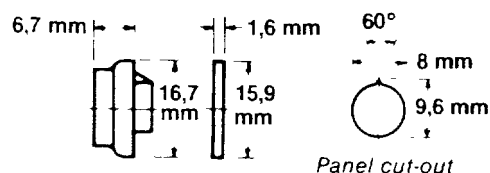

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belling lee manufacturer](#):

Other Similar products are found below :

[123984R](#) [003846CM](#) [124104AM](#) [L1744A](#) [L2006A](#) [124054X](#) [124064G](#) [REF-H](#) [L2143/6/L](#) [L1349/FP](#) [L1350/NI](#) [L1904C/8/CS](#) [L1790A](#)
[L693/3](#) [L754/2](#) [003722EM](#) [124102EM](#) [L1792A](#) [REF-02](#) [SF2032-6/01](#) [L1317/BLACK](#) [L1382/H](#) [L2225](#) [L1318/BLACK](#) [L309/1/RED](#)
[L1904C/6/CS](#) [L1904A/6/FP](#) [Y9236](#) [L1904A/8/FS](#) [L1904A/8/FP](#) [L1904C/7/PCR](#) [L2224](#) [L1904C/4/CS](#) [L2180](#) [L1568/1/RED](#) [L1639B/NI](#)
[REF-06](#) [REF-11](#) [REF-F](#) [L1001/1/BLACK](#) [L1436A/P](#) [L1436B/S](#) [L1465/RPCS](#) [L1793A](#) [L1850/1/GREEN](#) [L1850/1/RED](#) [L1896A/GREEN](#)
[L1896A/RED](#) [L1904A/5A/FP](#) [L1904A/5/FP](#)