

## DC - 3 WIRE METAL BLOCK HOUSING 10-30V, 400mA

Selection of operating frequency allows units to be mounted adjacently without interference

- **Block Sensors feature large sensing distances**
- **Some models feature adjustable sensing distance**
- **LED for Output Energized**
- **Carries  $\text{C}\text{E}$  mark**


### 100 x 50 x 40mm Block Non-Flush Mount Sensing Distance Adjustable to 70mm (2.76 in.)

Sensing Distance		Adjustable to 70mm (2.76 in.)	
Cable or Connector Style	Cat. No.	Cable	59
<b>PNP</b>	Normally Open	9809-0100 (f1)*	9809-0159 (f1)*
		9809-3400 (f2)*	9809-3459 (f2)*
		9809-3500 (f3)*	9809-3559 (f3)*
<b>NPN</b>	Normally Open	9809-0300 (f1)*	9809-0359 (f1)*
		9809-0400 (f2)*	9809-0459 (f2)*
		9809-0500 (f3)*	9809-0559 (f3)*
Ripple Voltage		≤10%	≤10%
Voltage Range		10V - 30V	10V - 30V
Supply Current		≤12 mA	≤12 mA
Maximum Load Current		400 mA	400 mA
Voltage Drop Across Sensor		≤2.4V	≤2.4V
Maximum Leakage Current		≤10 μA	≤10 μA
Switching Frequency		300Hz	300Hz
Hysteresis		≤15%	≤15%
Temperature Drift		≤10%	≤10%
Repeatability		7mm (.28 in.)	7mm (.028 in.)
Housing Material		Aluminum	Aluminum
LED		One LED	One LED

Note: Sensor dimensions in mm.

#### Fixed Cable

PVC 2m (6ft. 6in.). For 5m (16 ft. 5 in.) cable length, change the last two digits of the part number to 02. For other cable lengths and/or PUR cable, please consult Altech.

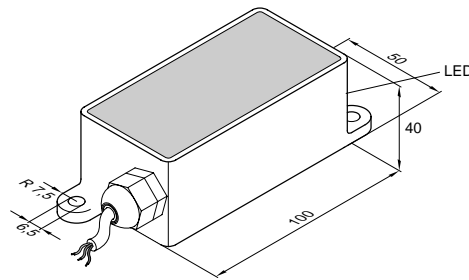


#### 59 Style Connector

4-pin, Metal, 19mm (.75 in.) device

#### \* Also available in a 65 Style Connector

4-pin Micro style, 12mm (.47 in.). Consult Altech.

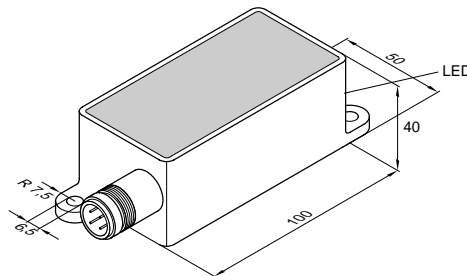

- IEC(529) IP67 (NEMA 1, 3, 4, 6, 12, 13) Protection
- Short Circuit Protection
- Overload Protection
- Reverse Polarity Protection
- Wire Break Resistance
- Temperature Range: -25 to 70°C (-13 to 158°F)

\* For operation where units will be located adjacently, models with different operating frequencies must be selected

#### Metric/in. Conversion Table

6.5 mm = .25 in.	50 mm = 1.96 in.
7.5 mm = .29 in.	100 mm = 3.93 in.
40mm = 1.57 in.	

This table converts millimeters to inches in reference to the illustrations included on these pages

#### Accessories

##### 2 meter (6 ft. 6 in.) DC Cable Assemblies for Quick Disconnect Sensors

59 Connector 9512-0200 PVC Straight


Change last digit of connector number to 2 for 5 meter cable

Refer to pages 116-121 for more cable information




#### Wiring Diagrams

Note: Wire colors are applicable to cable purchased from Altech

##### PNP



##### NPN



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)  
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N](#) [10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#)  
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)  
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM952A126100LE](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#) [QT-08L](#)  
[34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IMM32188C](#) [IS2](#) [IS31SE5000-UTLS2-TR](#)  
[34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#) [XS512BLNAM12](#)