

COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 20 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX
BOUNCE 2.0 MS MAX

CUSTOMER DATA SHEET

CONTACTS WILL SWITCH WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN

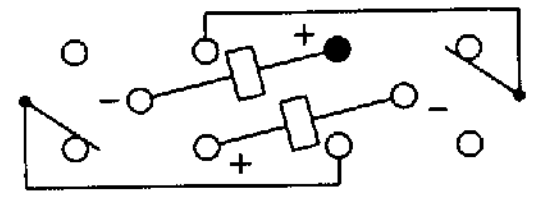

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/2/93 | CK. 11/3/93



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "LS" RELAY

LSBW-2C-24A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[6-1393813-4](#) [6-1462039-0](#) [6-1617529-6](#) [617-12](#) [67RPCX-3](#) [7-1393809-0](#) [7-1393813-3](#) [7556072001](#) [80.010.4522.1](#) [FTR-B4GA006Z](#)
[FW1210S02](#) [9-1393813-6](#) [9-1617519-3](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [A-1.5W-K](#) [DF2E-L2-DC3V](#) [DS1EM24J](#) [DS1EM5J](#) [DS1ES5J](#) [DS4E-](#)
[M-DC5V-H48](#) [EC2-4.5TNJ](#) [EC2-9NJ](#) [B07B939BC1-0868](#) [1608043-4](#) [1617076-5](#) [1617117-3](#) [1617137-2](#) [1617518-5](#) [1617560](#)
[HMB1130K00](#) [HMB1131S06](#) [HMS1119S01](#) [HMS1131S10](#) [HMS1201S03](#) [HMS1201S87](#) [HMS1205S02](#) [2-1393807-6](#) [2-1617071-2](#) [2-](#)
[1617594-1](#) [JMGSC-5LW](#) [K6-PS](#) [KHS-17D11-110](#) [9-1393761-0](#) [9-1617352-3](#) [9-1617583-1](#) [276XAXH-9D](#) [1617072-3](#) [1617075-4](#) [1617109-](#)