



AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm <sup>2</sup> [5,180-13,100] SOLID OR STRANDED	
FOR APPLICATION TOOLING ASSISTANCE CENTER		TOOLING ASSISTANCE CENTER 1-800-722-1111		MATERIAL	
FOR ORDER ENTRY		1-800-526-5142		FINISH	

500	LOOSE PIECE	PART NO. 696072-1
QTY	DESCRIPTION	PART NO.


THIS DRAWING IS A CONTROLLED DOCUMENT.  
 DWN JR RUTH 12/17/98  
 CHK MS FEHER 12/17/98  
 APVD J TALLEY 12/17/98  
 NAME  
 PRODUCT SPEC UL 486 A-B  
 APPLICATION SPEC 114-2157  
 WEIGHT -  
 SIZE A3  
 CAGE CODE 00779  
 DRAWING NO 696072  
 RESTRICTED TO -  
 REV C1  
 SHEET 1 OF 1  
 SCALE 5:1  
 CUSTOMER DRAWING

1 FOR  $\phi 3.810-6.350$  [ $\phi .150-.250$ ] WIRE INSULATION.  
 2 BODY MATERIAL THK IS 0.991 $\pm$ 0.051 [0.39 $\pm$ .002]  
 3 STAMP "8S AMP 12-10\*", LOCATED APPROX AS SHOWN.  
 4 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.  
 5 MATERIAL: BODY: PHOSPHOR BRONZE PER ASTM B103 SLEEVE: COPPER (ASTM B-152) INSULATION: NYLON.  
 6 FINISH: BODY & SLEEVE: TIN PLATE PER ASTM B545 INSULATION: COLOR-YELLOW.

	WIRE RANGE	12-10 AWG SOLID OR STRANDED
	12-10 AWG SOLID OR STRANDED	FILE E13288 Listed

P	LTR	DESCRIPTION	DATE	DWN	APVD
C	C	REV PER ECR 10-005107	08MAR10	JR	TM
C1	C1	REVISED PER ECO-17-007400	27NOV2017	RS	DR

REVISIONS

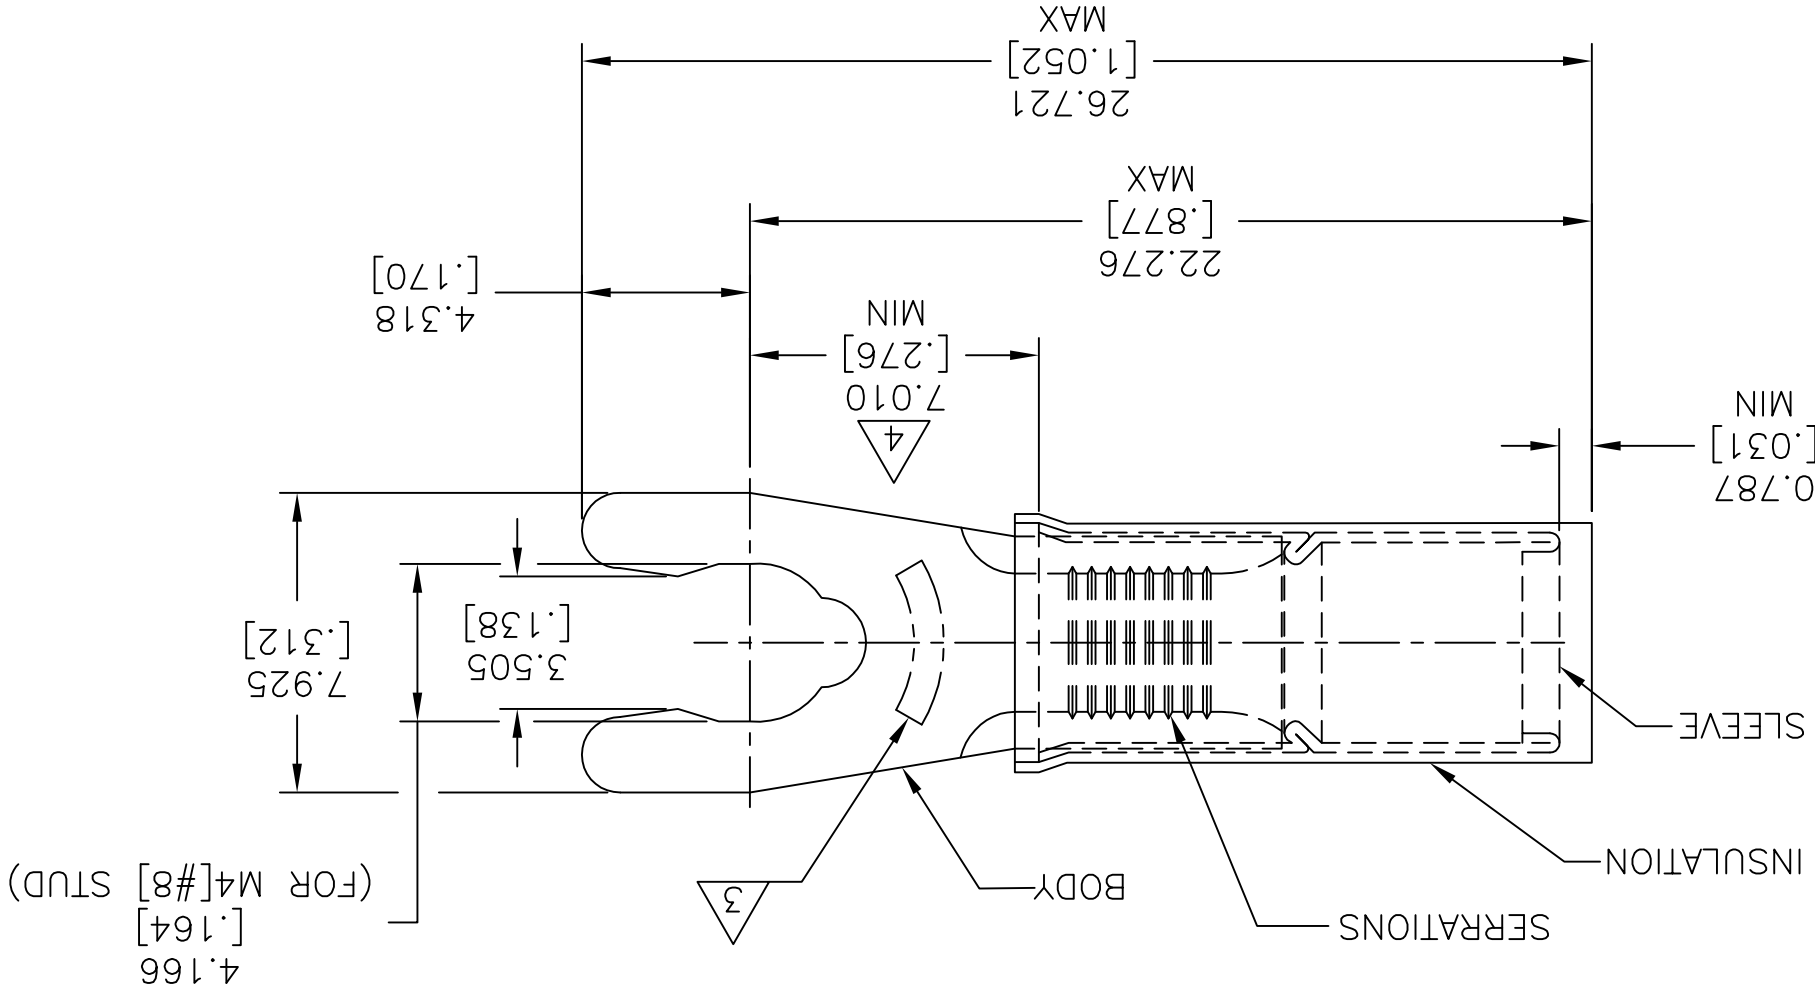

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)