


Double Pole, Electrically Held, 2 Amps and Less (Continued)

.150 Grid-space Relays
Type 3SBC (2PDT) Standard
135 mW 2PDT
50 mW (Form AB)
1 PNC-1 PNO



Product Facts

- Low profile... only 0.32 inches high
- Internal diode for coil transient suppression and transistor driven models available
- Qualified to MIL-R-39016/13
- RF designs available

The .150 Grid-space relay — only 0.32 inches high — saves space in electronic packaging. The pin spacing allows you to insert the relay with no intermediate pin spreaders as well as meet applicable military specifications.

Electrical Characteristics

Contact Ratings —
 DC resistive — 2 amps at 28 volts (50,000 operations)
 1 Amp @ 28 V (100,000 operations)
 DC inductive — 0.5 amps at 28 volts, 200 mH
 AC resistive — 0.5 amps at 115 volts
 AC — 0.125 amps at 115 volts (case grounded)
 Low-level — 50 µA at 50 mV
 Peak AC or DC

Contact Resistance —
 0.050 ohms max.; 0.150 ohms after life test

Life — 100,000 operations at rated loads listed; 1,000,000 operations at low-level loads

Operating Characteristics

Operate Time — 4 ms max.
Release Time — 4 ms max.
Contact Bounce — 1.5 ms
Dielectric Strength —
 500 volts rms at sea level;
 350 volts rms at 70,000 feet and above
Insulation Resistance — 1,000 megohm min. over temperature range

Environmental Characteristics

Vibration — 30G, to 3000 Hz
Shock — 100 G at 11 ms
Temperature — -65°C to +125°C

See page 1-44 for Mounting Forms, Terminals and Circuit Diagrams.

Coil Table Type 3SBC (All Values DC)*2PDT, 135 mW Sensitivity: (Code 1)

| Coil Code Letter | Coil Resistance @ 25C (ohms) | Voltage Calibrated, Code 5 | | | | Current Calibrated, Code 6 | | | |
|------------------|------------------------------|----------------------------|--------------------------|-----------------------------|------|-------------------------------------|---------------------------------|----------------------------------|------|
| | | Suggested Source Volts† | Max. Operate Volts @ 25C | Release Voltage Range @ 25C | | Max. Continuous Current @ 125C (mA) | Max. Operate Current @ 25C (mA) | Release Current Range @ 25C (mA) | |
| | | | | Max. | Min. | | | Max. | Min. |
| A | 44 ± 10% | 3.5-6.2 | 2.4 | 1.45 | 0.26 | 87.0 | 54.5 | 32.7 | 6.00 |
| B | 56 ± 10% | 4.0-7.0 | 2.7 | 1.6 | 0.3 | 77.0 | 48.3 | 28.6 | 5.30 |
| D | 140 ± 10% | 6.4-12.0 | 4.4 | 2.6 | 0.5 | 50.3 | 31.4 | 18.5 | 3.60 |
| E | 210 ± 10% | 8.0-16.0 | 5.4 | 3.2 | 0.6 | 40.0 | 25.7 | 15.4 | 2.80 |
| L | 650 ± 10% | 13.6-24.0 | 9.5 | 5.6 | 1.0 | 22.9 | 14.3 | 8.6 | 1.54 |
| K | 1350 ± 10% | 20.0-35.0 | 13.5 | 8.1 | 1.5 | 15.5 | 10.0 | 6.0 | 1.10 |
| N | 2245 ± 10% | 26.0-46.0 | 17.1 | 10.5 | 1.9 | 12.0 | 7.6 | 4.7 | 0.84 |

Coil-Data (All Values DC)* Type 3SBC Form AB 50 mW Sensitivity non mil spec: (Code 2)

| Coil Code Letter | Coil Resistance @ 25C (ohms) | Voltage Calibrated, Code 5 | | | | Current Calibrated, Code 6 | | | |
|------------------|------------------------------|----------------------------|--------------------------|-----------------------------|------|-------------------------------------|---------------------------------|----------------------------------|------|
| | | Suggested Source Volts† | Max. Operate Volts @ 25C | Release Voltage Range @ 25C | | Max. Continuous Current @ 125C (mA) | Max. Operate Current @ 25C (mA) | Release Current Range @ 25C (mA) | |
| | | | | Max. | Min. | | | Max. | Min. |
| B | 56 ± 10% | 2.6-7.0 | 1.8 | 1.1 | 0.16 | 46.5 | 29.1 | 18.2 | 3.30 |
| C | 85 ± 10% | 3.3-9.5 | 2.3 | 1.4 | 0.20 | 38.7 | 24.2 | 15.1 | 2.70 |
| D | 140 ± 10% | 4.3-12.0 | 2.9 | 1.8 | 0.27 | 30.4 | 19.0 | 11.9 | 2.10 |
| E | 210 ± 10% | 5.3-14.0 | 3.6 | 2.2 | 0.33 | 24.8 | 15.5 | 9.7 | 1.75 |
| F | 360 ± 10% | 6.7-19.0 | 4.5 | 2.8 | 0.41 | 18.9 | 11.8 | 7.2 | 1.30 |
| G | 510 ± 10% | 8.2-23.0 | 5.6 | 3.5 | 0.51 | 15.8 | 9.9 | 6.2 | 1.10 |
| H | 775 ± 10% | 10.0-26.0 | 6.8 | 4.2 | 0.62 | 12.8 | 8.0 | 5.0 | 0.90 |
| K | 1350 ± 10% | 13.2-35.0 | 9.0 | 5.6 | 0.82 | 9.8 | 6.1 | 3.8 | 0.68 |
| N | 2245 ± 10% | 16.8-46.0 | 11.4 | 7.1 | 1.00 | 7.4 | 4.6 | 2.9 | 0.52 |

*Values listed are factory test and inspection data. User should allow for meter variations.

†At nominal resistance plus 10%.


‡Applicable over the operating temperature range in circulating air.

See Page 1-42 for ordering instructions.

* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

Double Pole, Electrically Held, 2 Amps and Less (Continued)

.150 Grid-space Hybrid Relays
Single Diode, Dual Diode
Type 3SBC (2PDT)
135 mW

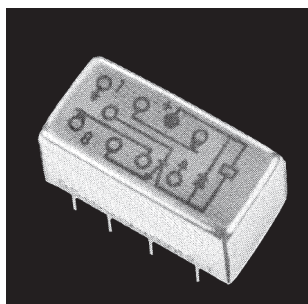

Product Facts

- Low profile... only 0.32 inches high
- 50 milliwatt forms available
- Qualified to MIL-R-39016/37
- Qualified to MIL-R-39016/38
- RF designs available

The hybrid .150 Grid-space relay — only 0.32 inches high — saves space in electronic packaging. The pin spacing allows you to insert the relay with no intermediate pin spreader.

Electrical Characteristics

Contact Ratings —
 DC resistive — 2 amps at 28 volts (50,000 operations)
 1 Amp @ 28 V (100,000 operations)
 DC inductive — 0.5 amps at 28 volts, 200 mH
 AC resistive — 0.5 amps at 115 volts
 AC — 0.125 amps at 115 volts (case grounded)
 Low-level — 50 µA at 50 mV
 Peak AC or DC

Contact Resistance —
 0.050 ohms max.; 0.150 ohms after life test

Life — 100,000 operations at rated loads listed; 1,000,000 operations at low-level loads

Operating Characteristics

Operate Time — 4 ms max.
Release Time — 6 ms max.
Contact Bounce — 1.5 ms
Dielectric Strength (Note 1) —
 500 volts rms at sea level;
 350 volts rms at 70,000 feet and above
Insulation Resistance (Note 1) —
 1,000 megohm min. over temperature range

Environmental Characteristics

Vibration — 30G, to 3000 Hz
Shock — 100 G at 11 ms
Temperature — -65°C to +125°C

Semiconductor Characteristics at 25°C

Diode —
 Max. Negative Transient — 1.0 volt
 Breakdown Voltage — 100 VDC @ 10 µA
 Max. Leakage Current — 1 µA @ 50 VDC

See page 1-44 for Mounting Forms, Terminals and Circuit Diagrams.

Coil Table Single Diode (All Values DC)*(2DPT), 135 mW Sensitivity: (Code 5)

| Coil Code Letter | Coil Resistance (@ 25C (ohms)) | Voltage Calibrated, Code 5 | | | | Current Calibrated, Code 6 | | | |
|------------------|--------------------------------|----------------------------|----------------------------|-------------------------------|------|---------------------------------------|-----------------------------------|------------------------------------|------|
| | | Suggested Source Volts† | Max. Operate Volts (@ 25C) | Release Voltage Range (@ 25C) | | Max. Continuous Current (@ 125C (mA)) | Max. Operate Current (@ 25C (mA)) | Release Current Range (@ 25C (mA)) | |
| | | | | Max. | Min. | | | Max. | Min. |
| A | 44 ± 10% | 3.5- 6.2 | 2.4 | 1.45 | 0.26 | 87.0 | 54.5 | 32.7 | 6.00 |
| B | 56 ± 10% | 4.0- 7.0 | 2.7 | 1.6 | 0.3 | 77.0 | 48.3 | 28.6 | 5.30 |
| D | 140 ± 10% | 6.4-12.0 | 4.4 | 2.6 | 0.5 | 50.3 | 31.4 | 18.5 | 3.60 |
| E | 210 ± 10% | 8.0-16.0 | 5.4 | 3.2 | 0.6 | 40.0 | 25.7 | 15.4 | 2.80 |
| L | 650 ± 10% | 13.6-24.0 | 9.5 | 5.6 | 1.0 | 22.9 | 14.3 | 8.6 | 1.54 |
| K | 1350 ± 10% | 20.0-35.0 | 13.5 | 8.1 | 1.5 | 15.5 | 10.0 | 6.0 | 1.10 |
| N | 2245 ± 10% | 26.0-46.0 | 17.1 | 10.5 | 1.9 | 12.0 | 7.6 | 4.7 | 0.84 |


Coil Table Dual Diode (All Values DC)*(2DPT), 135 mW Sensitivity: (Code 6)

| Coil Code Letter | Coil Resistance (@ 25C (ohms)) | Suggested Source Volts† | Max. Operate Volts (@ 25C) | Release Voltage Range (@ 25C) | Max. Continuous Current (@ 125C (mA)) | Max. Operate Current (@ 25C (mA)) | Release Current Range (@ 25C (mA)) |
|------------------|--------------------------------|-------------------------|----------------------------|-------------------------------|---------------------------------------|-----------------------------------|------------------------------------|
| A | 44 ± 10% | 3.9- 7.0 | 3.4 | 2.0 | 0.37 | 98.2 | 77.3 |
| B | 56 ± 10% | 4.6- 8.0 | 3.7 | 2.2 | 0.41 | 89.8 | 66.1 |
| D | 140 ± 10% | 7.8-12.0 | 5.4 | 3.2 | 0.6 | 52.4 | 38.6 |
| E | 210 ± 10% | 9.3-16.0 | 6.4 | 3.8 | 0.7 | 41.4 | 30.5 |
| L | 650 ± 10% | 15.0-24.0 | 10.5 | 6.2 | 1.1 | 23.6 | 16.2 |
| K | 1350 ± 10% | 21.0-35.0 | 14.5 | 8.7 | 1.6 | 16.0 | 10.7 |
| N | 2245 ± 10% | 27.0-46.0 | 18.1 | 10.9 | 2.0 | 12.1 | 8.1 |

Ordering Instructions

Example: The relay selected in the example is a FORM AB .150-grid relay, current calibrated, end bracket mounting with 0.13-inch solder hook header, 210 ohms coil resistance, and 50 mW sensitivity. By choosing the proper code for each of these relay characteristics, the catalog number is 3SBC6131E2. The letter R following sensitivity code indicates relay received 5000 operation miss-test. Ex. 3SBC6131E2R.

Note: Relays specified by catalog numbers (per above directions) are general use items controlled by catalog specifications. Relays to be controlled by customer drawings — or relays having requirements not covered in this publication — will be assigned special catalog numbers upon request.

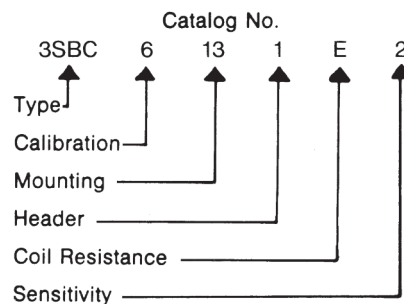

* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[6-1393813-4](#) [6-1462039-0](#) [6-1617529-6](#) [617-12](#) [67RPCX-3](#) [7-1393809-0](#) [7-1393813-3](#) [7556072001](#) [80.010.4522.1](#) [FTR-B4GA006Z](#)
[FW1210S02](#) [9-1393813-6](#) [9-1617519-3](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [A-1.5W-K](#) [DF2E-L2-DC3V](#) [DS1EM24J](#) [DS1EM5J](#) [DS1ES5J](#) [DS4E-](#)
[M-DC5V-H48](#) [EC2-4.5TNJ](#) [EC2-9NJ](#) [B07B939BC1-0868](#) [1608043-4](#) [1617076-5](#) [1617117-3](#) [1617137-2](#) [1617518-5](#) [1617560](#)
[HMB1130K00](#) [HMB1131S06](#) [HMS1119S01](#) [HMS1131S10](#) [HMS1201S03](#) [HMS1201S87](#) [HMS1205S02](#) [2-1393807-6](#) [2-1617071-2](#) [2-](#)
[1617594-1](#) [JMGSC-5LW](#) [K6-PS](#) [KHS-17D11-110](#) [9-1393761-0](#) [9-1617352-3](#) [9-1617583-1](#) [276XAXH-9D](#) [1617072-3](#) [1617075-4](#) [1617109-](#)