


MINIMUM INSERTION LOSS IN DB
LINE TO GROUND IN 50 OHM CIRCUIT


MINIMUM INSERTION LOSS IN DB
LINE TO LINE IN 50 OHM CIRCUIT

RECOMMENDED PANEL CUTOUTS








CURRENT	FREQUENCY MHZ			RATING	RATING	FREQUENCY MHZ			CURRENT	RATING	RATING						
	0.15	0.5	1			3	5	10				30					
3 AMP	21	27	30	29	26	23	15	3 AMP	4	12	18	31	40	48	41		
6 AMP	11	15	17	19	18	16	13	6 AMP	4	12	16	26	35	40	35		
10 AMP	5	8	10	12	11	11	10	10 AMP	4	12	16	26	33	40	32		
H MODELS			H MODELS			S MODELS			S MODELS								
3 AMP	21	27	33	40	44	50	32	3 AMP	4	12	15	30	48	50	45		
6 AMP	12	17	23	32	36	44	30	6 AMP	4	12	15	22	42	55	45		
10 AMP	5	10	13	23	27	35	27	10 AMP	4	12	15	22	42	55	45		
H MODELS			H MODELS			S MODELS			S MODELS								
PS	1.06	1.12	1.12	1.06	1.06	1.06	1.06	PS	1.06	1.12	1.12	1.06	1.06	1.06	1.06		
PSL	2.201	2.201	2.201	2.201	2.201	2.201	2.201	PSL	1.12	1.12	1.12	1.12	1.12	1.12	1.12		
PE	2.201	2.201	2.201	2.201	2.201	2.201	2.201	PE	1.12	1.12	1.12	1.12	1.12	1.12	1.12		
PM	2.201	2.201	2.201	2.201	2.201	2.201	2.201	PM	1.12	1.12	1.12	1.12	1.12	1.12	1.12		
PSC	1.06	1.12	1.12	1.06	1.06	1.06	1.06	PSC	1.06	1.12	1.12	1.06	1.06	1.06	1.06		
PSJ	1.06	1.12	1.12	1.06	1.06	1.06	1.06	PSJ	1.06	1.12	1.12	1.06	1.06	1.06	1.06		
DIMENSION 'A'			DIMENSION 'A'			DIMENSION 'A'			DIMENSION 'A'			DIMENSION 'A'			DIMENSION 'A'		
UNSHIELDED			UNSHIELDED			SHIELDED			UNSHIELDED			UNSHIELDED			UNSHIELDED		
STYLE			STYLE			STYLE			STYLE			STYLE			STYLE		

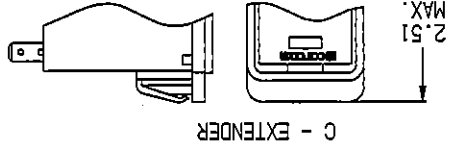

C - EXTENDER

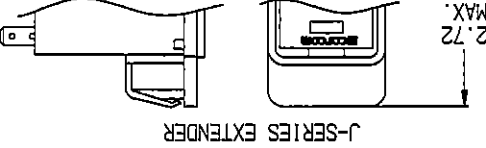

J-SERIES EXTENDER



PM

PS




PE

UNFILTERED


UNSHIELDED

"A" SHIELD


"B" SHIELD

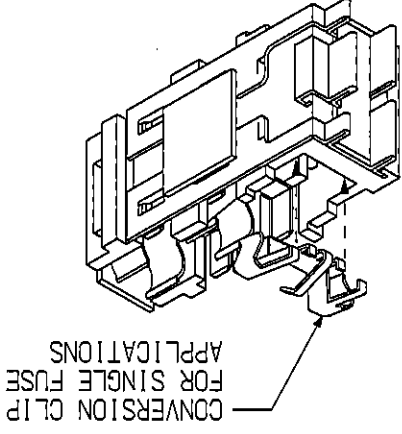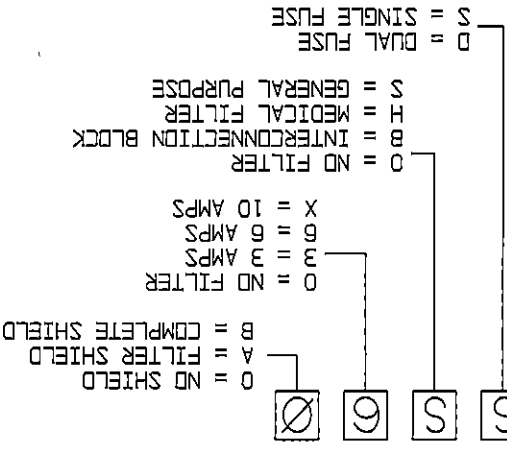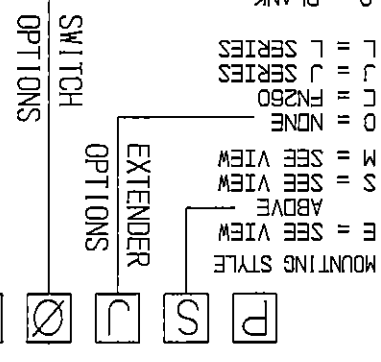

CONVERSION CLIP FOR SINGLE FUSE APPLICATIONS



FILTERED



UNFILTERED

REAR VIEW

CUSTOMER DRAWING



CONCOM PRODUCTS, 620 S. BUTTERFIELD RD., WUNDELEIN IL 60060


TYCO ELECTRONICS PART NO.

REV.	D
SCALE:	1:2
DATE:	2-4-97
DRAWING NUMBER:	P-SERIES

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA USA.



SHEET 1 OF 2	
ECN#	APPRD DATE REV
10-002963	ELC 19AUG10 C
12-015327	TAM 22AUG12 D

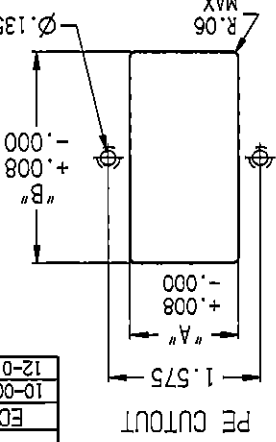

PE CUTOUT

PM CUTOUT

NOTE: FOR SNAP-IN APPLICATIONS, THE A SIDES MUST HAVE A .020 R. ON INSTALLATION SIDE.



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

SCALE: NA
DATE: 2/4/97
DRG. BY: [blank]

P-SERIES
DRAWING NUMBER:

REV. D

TYCO ELECTRONICS PART NO.

CUSTOMER DRAWING
P-SERIES

CORCOM PRODUCTS, 620 S. BUTTERNUT RD., MUNDLEIN, IL 60060



UL RECOGNIZED
CSA CERTIFIED
VDE APPROVED



THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

SAFETY ORGANIZATIONS

GENERAL NOTES:
CONVERSION CLIP PROVIDED ON FUSEHOLDER FOR SINGLE FUSE MODELS.
SWITCH: DOUBLE INSULATED RATED FOR 10,000 OPERATIONS AT FULL LOAD.
51 AMP INRUSH CAPABILITY.
TERMINALS: FOUR 0.187" x 0.032" QUICK CONNECT TABS
ONE SOLDER TERMINAL

SEE INDIVIDUAL CUSTOMER
DRAWINGS FOR OTHER (L AND Z)
P-SERIES VERSIONS.



S MODEL



H MODEL

RATED CURRENT, I_R:

3, 6 & 10 AMP
MODELS AVAILABLE

@ 250 VAC 50Hz:

S MODELS 0.50mA
H MODELS 51A

@ 120 VAC 60Hz:

H MODELS 27A
S MODELS 0.25mA

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND

FILTERED MODELS


RATED CURRENT, I_R:

10A @ 120 VAC
10A @ 250 VAC

NONFILTERED MODELS


NOTE 1: JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.
NOTE 2: LOCATION OF OPTIONAL FILTER, JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.

PROVISION FOR SINGLE FUSING

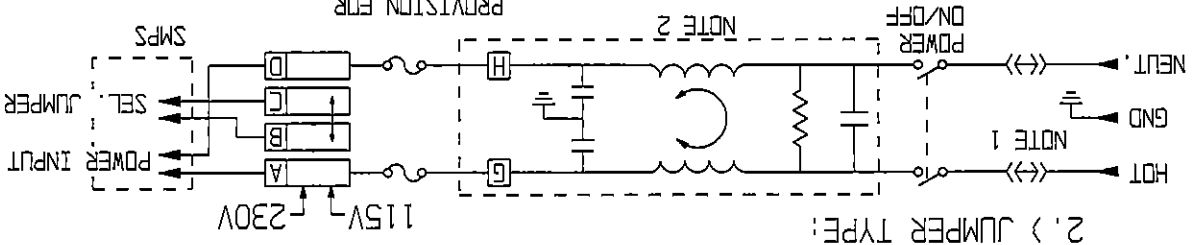

2.) JUMPER TYPE:

PROVISION FOR SINGLE FUSING

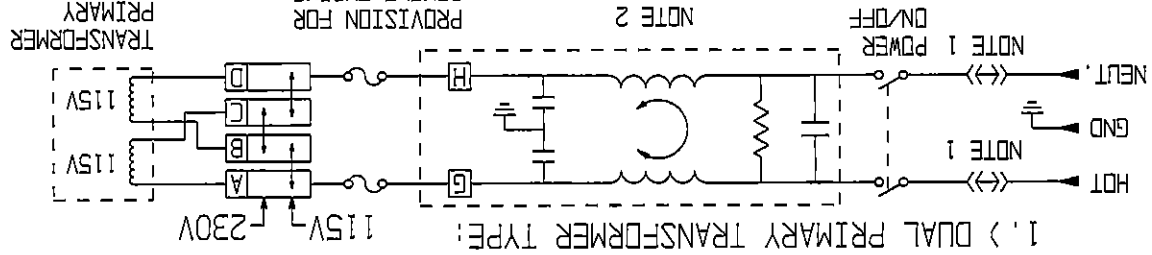

1.) DUAL PRIMARY TRANSFORMER TYPE:

HIPOT RATING (ONE MINUTE)

1500 VAC

1450 VDC

50/60 Hz

RATED VOLTAGE:
120/250 VAC

OPERATING VOLTAGES:
115/230 VAC

SELECTABLE OR FIXED:

ACCEPTS 1 OR 2 FUSES

1/4" x 1-1/4"

OR 5 x 20mm

-10°C TO +40°C

STORAGE TEMPERATURE:

-40°C TO +85°C

CURRENT OVERLOAD TEST:

6 TIMES I_R FOR 8 SECONDS

SPECIFICATIONS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC Power Entry Modules](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[0098.0050](#) [6-1609987-9](#) [6167.0002](#) [7-6609955-2](#) [FN389-4-22](#) [FN9233ER-12-06](#) [FN9233S1-10-06](#) [FN9233S1-8-06](#) [FN9233S1B-8-06](#)
[FN9233S1R-1-06](#) [FN9233S1R-12-06](#) [FN9233SB-1-06](#) [FN9233SB-12-06](#) [FN9233SB-8-06](#) [FN9233SR-10-06](#) [FN9233SR-3-06](#) [FN9244B-15-06](#)
[HI](#) [FN9244EB-3-06](#) [FN9244EB-8-06](#) [FN9244ER-15-06](#) [FN9244ER-8-06](#) [FN9244ES1-8-06](#) [FN9244ESB-8-06](#) [FN9244EU-6-06](#)
[FN9244R-12-06](#) [FN9244R-3-07](#) [FN9244R-8-06](#) [FN9244S1-10-06](#) [FN9244S1-12-06](#) [FN9244S1-3-06](#) [FN9244S1B-6-06](#) [FN9244S1R-3-06](#)
[FN9244S-6-06](#) [FN9244SB-10-06](#) [FN9244SB-6-06](#) [FN9244SB-8-06](#) [FN9244SR-10-06](#) [FN9244SR-6-06](#) [FN9244U-3-06](#) [FN9244U-8-06](#)
[FN9260A-6-06](#) [PE00SSSXB](#) [Fuse-H-EUR-1](#) [Fuse-H-USA-1](#) [PM00XD000](#) [PS0SSDBX0](#) [PS0SXSH3B](#) [A-0701-HT-H](#) [RAPC3FG](#) [15EJMS8](#)