


EXB50 Series Single output

Total Power: 20-50W
Input Voltage: 36-75VDC
of Outputs: Single

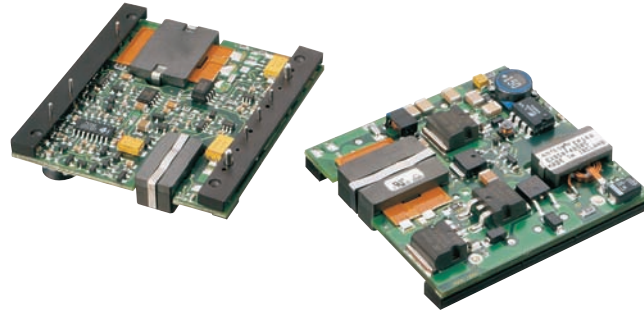

Special Features

- High efficiency topology, 91% typical on EXB50-48S05J
- Industry standard footprint
- Wide operating temperature -40 °C to +70 °C (natural convection)
- 60% to 110% output trim
- No minimum load
- Overvoltage and overtemperature protection
- Remote sense compensation
- Remote ON/OFF
- Available RoHS compliant
- 2 year warranty

Safety

UL/cUL CAN/CSA 22.2
No. 60950-00 : UL 60950
File No. E174104

TÜV Product Service.
Certificate No.
B 03 08 38572 036

Electrical Specifications

Output		
Voltage adjustability:		60% to 110%
Setpoint accuracy:		± 1.5%
Line regulation:	Low line to high line	0.1% max.
Load regulation:	Full load to min. load	0.2% max.
Total error band:		± 3.0%
Minimum load:		0%
Overshoot:	At turn-on and turn-off	None
Undershoot:		None
Ripple and noise: (see Note 1)	5 Hz to 20 MHz	100 mV pk-pk 20 mV rms
Transient response: (See Notes 2 and 8)	48 V models	2.0% peak deviation, 200 μs recovery to within total error band
Remote sense:	(See Note 9)	10% o/p voltage change

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

Electrical Specifications cont.

Input		
Input voltage range: (See Note 14)	48 V nominal 100 V 100 ms transient	36 - 75 Vdc
Input current:	48 V no load 48 V Remote OFF	60 mA max. 10 mA max.
Input current (max) (See Note 4)	48 V models	1.7 A max. @ Io max. and Vin = 36 - 75 Vdc
Input reflected ripple: (See Note 6)	48 V models	50 mA (pk-pk) typ.
Remote ON/Off Logic compatibility ON OFF	(See Note 15)	Open collector ref to -Input Open circuit or > 2 Vdc < 1.2 Vdc
Undervoltage lockout:	48 V Power up 48 V Power down	33.2 V max. 30.9 V min.
Start-up time: (see Note 7)	Power up Remote ON/OFF	30 ms 25 ms
EMC Characteristics		
Conducted emissions:	EN55022 (See Note 3) EN55022 (See Note 3)	Level A Level B
Radiated emissions:	EN55022	Level A
Immunity:	(See Note 13)	
ESD air:	EN61000-4-2 8 kV (NP), 15 kV (RP)	
ESD contact:	EN61000-4-2 6 kV (NP), 8 kV (RP)	
Radiated field enclosure:	EN61000-4-3 10 V/m (NP)	
Conducted (DC power):	EN61000-4-6 10 V/m (NP)	
Conducted (signal)	EN61000-4-6 10 V/m (NP)	
General Specifications		
Efficiency:		See table
Basic insulation:	Input/output	1500 Vdc
Switching frequency:	Fixed	300 kHz typ.
Approvals & Standards:	(See Note 5)	IEC60950/EN60950, UL/cUL1950, CSA C22.2 No. 950
Material flammability:		UL94V-0
Weight:		50 g (1.77 oz)
MTBF:	MIL-HDBK-217F @ 25 °C 100% load ground benign	270,000 hours
Environmental Specifications		
Thermal performance: (See Notes 11, 12)	Operating ambient, temperature (natural convection) Non-operating	-40 °C to +70 °C -55 °C to +125 °C Classes T3.1 to T3.5
ETS 300 019-2-3		
Altitude: (See Note 10)	3,000 metres 10,000 metres	Derate max. output current by 20% Derate max. output current by 50%

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

Ordering Information

Output Power (Max.)	Input Voltage	OVP	Output Voltage	Output Currents		Efficiency (Typ)	Regulation		Model Numbers ^(16,17)
				(Min)	(Max)		Line	Load	
18 W	36 - 75 Vdc	2.15 Vdc	1.8 V	0 A	10 A	85.7%	± 0.1%	± 0.2%	EXB50-48S1V8J ⁽¹⁵⁾
20 W	36 - 75 Vdc	2.45 Vdc	2 V	0 A	10 A	87.5%	± 0.1%	± 0.2%	EXB50-48S2V0J ⁽¹⁵⁾
25 W	36 - 75 Vdc	2.95 Vdc	2.5 V	0 A	10 A	87.5%	± 0.1%	± 0.2%	EXB50-48S2V5J ⁽¹⁵⁾
33 W	36 - 75 Vdc	4 Vdc	3.3 V	0 A	10 A	90.0%	± 0.1%	± 0.2%	EXB50-48S3V3J ^(14,15)
50 W	36 - 75 Vdc	6.15 Vdc	5 V	0 A	10 A	91.0%	± 0.1%	± 0.2%	EXB50-48S05J ⁽¹⁵⁾
50 W	36 - 75 Vdc	14.2 Vdc	12 V	0 A	4.2 A	90.0%	± 0.1%	± 0.2%	EXB50-48S12J ⁽¹⁵⁾

Notes

- 1 Measured as per recommended set-up. 150 mV pk-pk for EXB50-48S12J.
- 2 $di/dt = 0.1 \text{ A}/\mu\text{s}$, $V_{in} = 48 \text{ Vdc}$, $T_c = 25^\circ\text{C}$, load change = 0.5 I_o max. to 0.75 I_o max. and 0.75 I_o max. to 0.5 I_o max.
- 3 The EXB50 meets level A and level B conducted emissions only with external components connected before the input pins to the converter.
- 4 Recommended input fusing is 3.15 A HRC 200 V rated fuse on the 48 V.
- 5 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 6 Simulated source impedance of 12 μH . 12 μH inductor in series with +V_{in}.
- 7 Start-up into resistive load.
- 8 Maximum output deviation is 10% inclusive of trim.
- 9 Contact factory for operation at higher altitude.
- 10 See Application Note 113 for derating curves.
- 11 Input transient (48 V) ETS300 132-2 ETR283.
- 12 100 V, 100 ms transient applies to the EXB50-48S3V3J models. Please add the suffix 'R03' to the model number e.g. EXB50-48S3V3R03J. This is also active low remote ON/OFF.
- 13 Active low remote ON/OFF available. Please add suffix '-R' to model number e.g. EXB50-48S3V3-RJ.
- 14 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 15 NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.PowerConversion.com> to find a suitable alternative.

CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.

Protection


Short-circuit	Continuous
Overvoltage	Non-latching clamp
Thermal	120 °C hot spot temperature with automatic recovery


Telecom Specification

Central office Interface A	ETS300-132-2, Input voltage and current requirements
----------------------------	--

External Output Trimming

Output can be externally trimmed by using the method shown below.



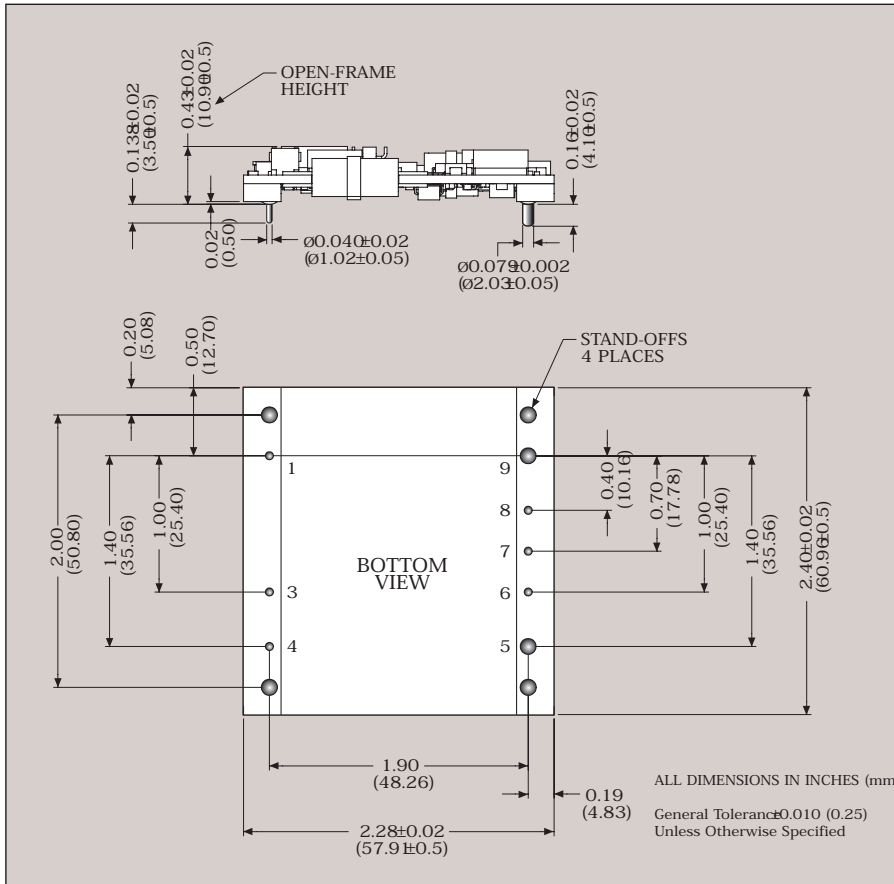

Pin Connections	
Pin Number	Function
Pin 1	-Vin
Pin 2	No Pin
Pin 3	Remote ON/OFF
Pin 4	+Vin
Pin 5	+Vout
Pin 6	+Sense
Pin 7	Trim
Pin 8	-Sense
Pin 9	-Vout

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2010 Emerson Electric Co.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [TME 0509S](#)