


3M™ Round Conductor Flat Cable

.050" 28 AWG Stranded, PVC

R9965 Series

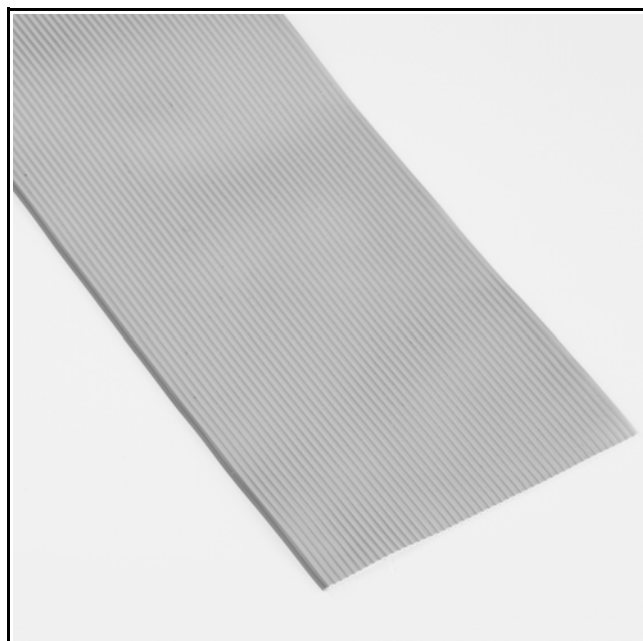

- 28 AWG wire on .050" centers permits mass termination to a broad line of IDC connectors
- Stranded wire provides flexibility and extended product life
- Zippable for branching or discrete termination
- Compatible with most .100" IDC connectors
- Large, splice free, 300 ft rolls support volume usage
- UL/CUL Standard Marking
- RoHS* compliant

TS-2101-06
Sheet 1 of 2

Date Modified: January 30, 2014

Physical

Insulation

Material: Polyvinyl Chloride (PVC)

Flammability: UL 94V-0

Color: Gray

Marking:

Marking: AWM 2651 105C 300V VW1 3M LH AWM 1A 105C 300V FT1 EU<50V

Conductors: 28 AWG (7 x 30) [7 x .127] Tinned Stranded Copper

Electrical

Voltage Rating: CSA: 300 V EU: <50 V

Insulation Resistance: $1 \times 10^{10} \Omega/10 \text{ ft}$ [3 m]

Withstanding Voltage: 1000 VAC for 1 minute

	Unbalanced	Balanced
Characteristic Impedance:	100 Ω	168 Ω
Capacitance:	14.98 pf/ft	8.46 pf/ft
Inductance:	0.15 $\mu\text{H}/\text{ft}$	0.24 $\mu\text{H}/\text{ft}$
Propagation Delay:	1.50 ns/ft	1.42 ns/ft
Velocity of Propagation:	67.6%	71.6%

Environmental

Temperature Rating: -20°C to +105°C

Flammability Rating: VW-1

* RoHS = Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment
"RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.

UL File No.: E42769, Style No.: 2651


3M™ Round Conductor Flat Cable

.050" 28 AWG Stranded, PVC

R9965 Series

No. of Conductors	Dim A	Dim B	Tolerance ±
6	0.300	0.250	0.005
	[7.62]	[6.35]	[0.13]
8	0.400	0.350	0.005
	[10.16]	[8.89]	[0.13]
9	0.450	0.400	0.005
	[11.43]	[10.16]	[0.13]
10	0.500	0.450	0.005
	[12.70]	[11.43]	[0.13]
14	0.700	0.650	0.005
	[17.78]	[16.51]	[0.13]
15	0.750	0.700	0.005
	[19.05]	[17.78]	[0.13]
16	0.800	0.750	0.005
	[20.32]	[19.05]	[0.13]
20	1.000	0.950	0.010
	[25.40]	[24.13]	[0.25]
24	1.200	1.150	0.010
	[30.48]	[29.21]	[0.25]

No. of Conductors	Dim A	Dim B	Tolerance ±
25	1.250	1.200	0.010
	[31.75]	[30.48]	[0.25]
26	1.300	1.250	0.010
	[33.02]	[31.75]	[0.25]
30	1.500	1.450	0.010
	[38.10]	[36.83]	[0.25]
34	1.700	1.650	0.010
	[43.18]	[41.91]	[0.25]
40	2.000	1.950	0.015
	[50.80]	[49.53]	[0.38]
50	2.500	2.450	0.015
	[63.50]	[62.23]	[0.38]
60	3.000	2.950	0.015
	[76.20]	[74.93]	[0.38]
64	3.200	3.150	0.015
	[81.28]	[80.01]	[0.38]

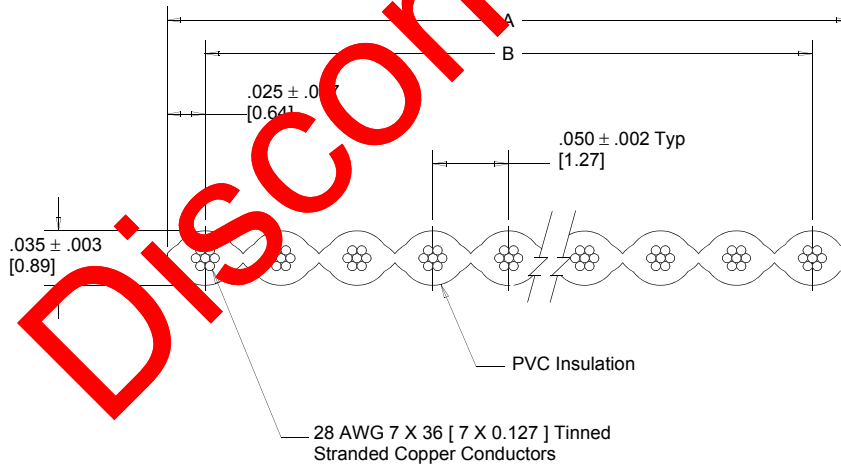

Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
inch	±.1	±.01	±.005

[] Dimensions for Reference Only

Note: Red marking on one edge of cable designates wire no. 1

Ordering Information

R9965/XX 300SF

Number of conductors
(See table)

Note: Available in 300 ft. splice free rolls only.

TS-2101-06
Sheet 2 of 2

Discontinued

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



3M Electronics

6801 River Place Blvd.
Austin, TX 78726-9000
800/225-5373
www.3M.com/electronics

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Minimum 10%
Post-Consumer Fiber

Printed in USA.

© 3M 2007

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Flat Cables](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[8132/08100](#) [FST-23A-15](#) [1301210030](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#) [281000616](#) [281000625](#) [9L28014-008-H300](#) [28100-0571](#) [28100-0602](#) [281000624](#) [28100-0650](#) [28100-0664](#) [336512-300](#) [336518](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [3625/08-30M](#) [362514100MSF](#) [40WDY00005](#) [5111993623](#) [336506-300](#) [336508-300](#) [C374910](#) [34WDY00006](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [57034-6](#) [812504](#) [8132/11100](#) [5-1437214-8](#) [1301210060](#) [1301210058](#) [1301190003](#) [1301210032](#) [5111196336](#) [607.5689.087](#) [607.5689.091](#) [3801/04](#) [1301210020](#) [3754/12](#) [902220736003000](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)