

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0038007095](#)
Status: **Active**
Overview: [KK 508 Connector System](#)
Description: KK Header, Vertical, with Polarizing Backwall, 6 Circuits, Tin (Sn) Plating, Circuit 4 Voiced

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-2599-0001-000 \(PDF\)](#)
[Product Specification PS-99020-0087-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


UL E29179

General

Product Family PCB Headers
Series [2599](#)
Application Signal, Wire-to-Board
Overview [KK 508 Connector System](#)
Product Name KK 508
UPC 800753729261

Physical

Breakaway No
Circuits (Loaded) 5
Circuits (maximum) 6
Color - Resin Natural
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-2
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 1.448/g
Number of Rows 1
Orientation Vertical
PC Tail Length 4.45mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 5.08mm
Pitch - Termination Interface 5.08mm
Plating min - Mating 5.080µm
Plating min - Termination 5.080µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Partial
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating See Product Specification
Termination Interface: Style Through Hole

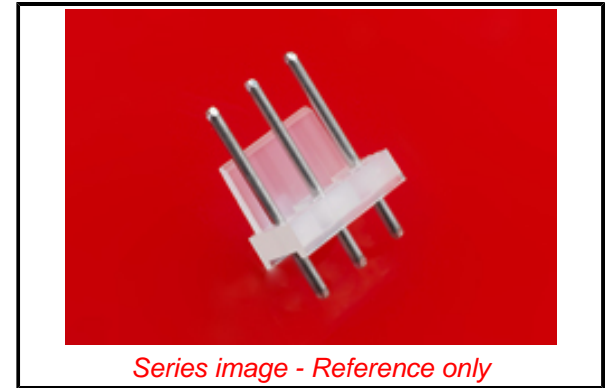

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[2599 Series](#)

Mates With

Crimp Housing [3001](#)
 PCB Receptacle
[3002](#)

Electrical

Current - Maximum per Contact	4.5A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	2599M06A04
--------------------	------------

Reference - Drawing Numbers

Packaging Specification	PK-2599-0001-000
Product Specification	PS-99020-0087-001
Sales Drawing	SDAE-2599M-NX

This document was generated on 10/23/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)