

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0713492076](#)  
**Status:** **Active**  
**Overview:** [C-Grid Connector Products](#)  
**Description:** 2.54mm Pitch C-Grid Header, Surface Mount, Dual Row, Vertical, Shrouded, 20 Circuits, 0.76µm Gold (Au) Selective Plating, with Press-fit Plastic Pegs

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                     | <a href="#">Product Specification TS-70541-001-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Packaging Specification PK-70873-0018 (PDF)</a>  |
| <a href="#">Product Specification PS-71349-001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |

**Agency Certification**

UL E29179

**General**


|                |   |
|----------------|---|
| Product Family | PCB Headers                               |
| Series         | <a href="#">71349</a>                     |
| Application    | Signal, Wire-to-Board                     |
| Overview       | <a href="#">C-Grid Connector Products</a> |
| Product Name   | C-Grid                                    |
| UPC            | 800753012509                              |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 20                             |
| Circuits (maximum)             | 20                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 50                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass, Phosphor Bronze         |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 3.659/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Vertical                       |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface       | 2.54mm                         |
| Pitch - Termination Interface  | 2.54mm                         |
| Plating min - Mating           | 0.762µm                        |
| Plating min - Termination      | 1.905µm                        |
| Polarized to Mating Part       | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Surface Mount                  |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
| Voltage - Maximum             | 250V |

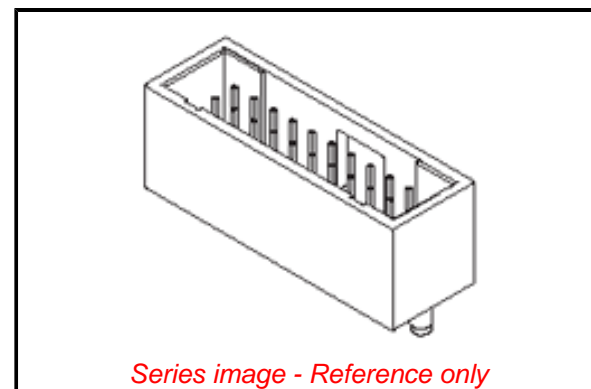

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/61/2018 (27 June  
2018)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[71349 Series](#)

**Solder Process Data**

|  |        |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 030    |
| Lead-free Process Capability                   | REFLOW |
| Max. Cycles at Max. Process Temperature        | 003    |
| Process Temperature max. C                     | 245    |

**Material Info****Reference - Drawing Numbers**

|                         |                                    |
|-------------------------|------------------------------------|
| Packaging Specification | PK-70873-0018                      |
| Product Specification   | PS-71349-001-001, TS-70541-001-001 |
| Sales Drawing           | SDA-71349-****                     |

This document was generated on 10/17/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)