


LQ series Snap-in Terminal Type, Standard



Approved by Reliability Center for Electronic Component, Japan-Certification No. RCJ-03-25D


- Rated capacitances available based on the numerical values in E-12 series. (Size : $\phi 22 \sim \phi 35$)




Specifications

Item	Performance Characteristics																											
Operating Temperature Range	-40 ~ +85°C (16 ~ 250V), -25 ~ +85°C (400 ~ 450V)																											
Voltage Range	16 ~ 450V																											
Capacitance Range	56 ~ 56000 μ F																											
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																											
Leakage Current	$I \leq 3\sqrt{CV}$ (μ A) (After 5 minutes' application of rated voltage) [C: Capacitance(μ F), V: Voltage(V)]																											
tan δ	Measurement frequency : 120Hz, Temperature : 20°C																											
	<table border="1"> <tr> <th>Rated voltage(V)</th> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> <td>160</td> <td>180</td> <td>200</td> <td>250</td> <td>400</td> <td>450</td> </tr> <tr> <th>tan δ (MAX.)</th> <td>0.50</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> </tr> </table>	Rated voltage(V)	16	25	35	50	63	80	100	160	180	200	250	400	450	tan δ (MAX.)	0.50	0.40	0.35	0.30	0.25	0.20	0.20	0.15	0.15	0.15	0.15	0.20
Rated voltage(V)	16	25	35	50	63	80	100	160	180	200	250	400	450															
tan δ (MAX.)	0.50	0.40	0.35	0.30	0.25	0.20	0.20	0.15	0.15	0.15	0.15	0.20	0.20															
Stability at Low Temperature	Measurement frequency : 120Hz																											
	<table border="1"> <tr> <th colspan="2">Rated voltage(V)</th> <td>16 ~ 100</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <th>Impedance ratio</th> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>8</td> </tr> <tr> <th>ZT/Z20(MAX.)</th> <td>Z-40°C/Z+20°C</td> <td>15</td> <td>12</td> <td>—</td> </tr> </table>	Rated voltage(V)		16 ~ 100	160 ~ 250	400 ~ 450	Impedance ratio	Z-25°C/Z+20°C	4	3	8	ZT/Z20(MAX.)	Z-40°C/Z+20°C	15	12	—												
Rated voltage(V)		16 ~ 100	160 ~ 250	400 ~ 450																								
Impedance ratio	Z-25°C/Z+20°C	4	3	8																								
ZT/Z20(MAX.)	Z-40°C/Z+20°C	15	12	—																								
Load Life	After an application of DC voltage (in the range of rated DC voltage even after over-lapping the specified ripple current) for 2000 hours at 85°C, capacitors shall meet the characteristics requirements indicated at right.																											
	<table border="1"> <tr> <th>Capacitance change</th> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <th>tan δ</th> <td>200% or less of initial specified value</td> </tr> <tr> <th>Leakage current</th> <td>Initial specified value or less</td> </tr> </table>	Capacitance change	Within $\pm 20\%$ of initial value	tan δ	200% or less of initial specified value	Leakage current	Initial specified value or less																					
Capacitance change	Within $\pm 20\%$ of initial value																											
tan δ	200% or less of initial specified value																											
Leakage current	Initial specified value or less																											
Shelf Life	After leaving capacitors under no load at 85°C for 1000 hours, they meet the requirements listed at right.																											
	<table border="1"> <tr> <th>Capacitance change</th> <td>Within $\pm 15\%$ of initial value</td> </tr> <tr> <th>tan δ</th> <td>150% or less of initial specified value</td> </tr> <tr> <th>Leakage current</th> <td>Initial specified value or less</td> </tr> </table>	Capacitance change	Within $\pm 15\%$ of initial value	tan δ	150% or less of initial specified value	Leakage current	Initial specified value or less																					
Capacitance change	Within $\pm 15\%$ of initial value																											
tan δ	150% or less of initial specified value																											
Leakage current	Initial specified value or less																											
Marking	Printed with white color letter on black sleeve.																											
Applicable Standards	JIS C 5141 and JIS C 5102.																											

Drawing

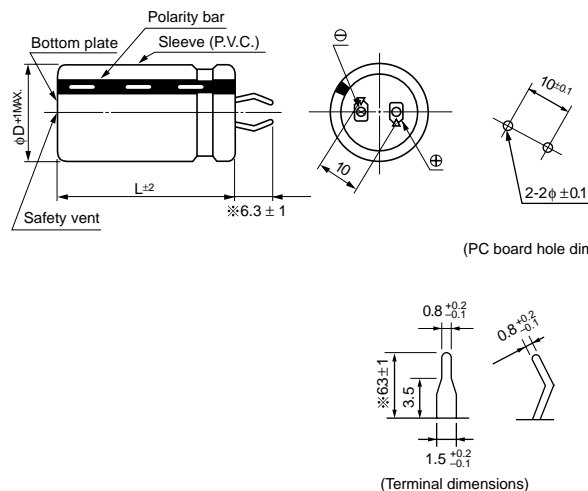

Type numbering system (Example : 200V 470 μ F)

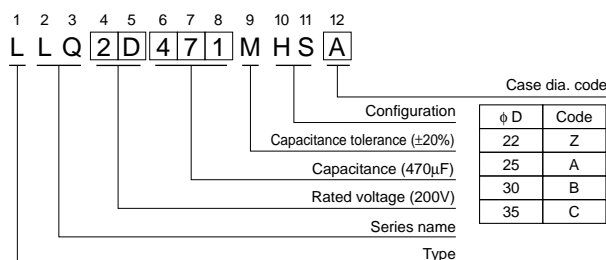

※ Shorter terminal (4.0 \pm 0.5) is also available upon request. Please refer to page 153 (LU series) for schematic of dimensions.

Frequency coefficient of allowable ripple current

Frequency(Hz)	50	60	120	1 k	10k ~	
Coeff.	16 ~ 100V	0.88	0.90	1.00	1.15	1.15
	160 ~ 250V	0.85	0.88	1.00	1.15	1.20
	400 ~ 450V	0.88	0.90	1.00	1.10	1.15

Minimum order quantity : 50pcs.

Dimension table in next pages.



■ Dimensions

D×L(mm)

Cap.(μF)	V(Code) Code	φD	16V(1C)				25V(1E)				35V(1V)				50V(1H)			
			22	25	30	35	22	25	30	35	22	25	30	35	22	25	30	35
3300	332													22×30	25×25			
														2.35	2.35			
3900	392									22×25				22×35	25×30			
										2.16				2.66	2.68			
4700	472									22×30	25×25			22×40	25×35	30×25	35×25	
										2.42	2.42			3.02	3.07	2.98	3.30	
5600	562					22×25				22×35				22×45	25×40	30×30		
						2.11				2.66				3.40	3.47	3.42		
6800	682					22×30	25×25			22×40	25×30	30×25		22×50	25×40	30×35		
						2.47	2.47			2.97	2.82	2.93		3.84	3.74	3.93		
8200	822	22×25				22×35				22×45	25×35			25×50	30×40	35×30		
		2.55				2.86				3.29	3.17			4.44	4.47	4.36		
10000	103	22×30				22×40	25×30	30×25		22×50	25×40	30×30				30×45	35×35	
		2.89				3.31	3.15	3.27		3.75	3.65	3.60				5.08	5.01	
12000	123	22×30	25×25			22×45	25×35	30×30		25×45	30×35	35×30				30×50	35×40	
		3.01	3.01			3.77	3.63	3.80		4.15	4.14	4.27				5.72	5.69	
15000	153	22×35	25×30	30×25		22×50	25×40					30×40	35×35				35×45	
		3.45	3.48	3.61		4.21	4.10					4.77	4.95				6.56	
18000	183	22×40	25×35			25×45	30×35	35×30				30×45	35×40				35×50	
		3.84	3.91			4.53	4.52	4.66				5.30	5.52				7.14	
22000	223	22×50	25×40	30×30			30×45	35×35					35×45					
		4.52	4.40	4.34			5.33	5.26					6.20					
27000	273		25×45	30×35			30×50	35×40					35×50					
			4.96	4.95			5.96	5.93					6.89					
33000	333			30×40	35×30													
				5.60	5.46													
39000	393			30×45	35×35													
				6.21	6.12													
47000	473			30×50	35×40													
				6.93	6.89													
56000	563				35×45													
					7.69													

Cap.(μF)	V(Code) Code	φD	63V(1J)				80V(1K)				100V(2A)						
			22	25	30	35	22	25	30	35	22	25	30	35			
1200	122					22×25				22×30	25×25						
						1.66				2.11	2.11						
1500	152					22×30				22×35	25×30	30×25					
						1.96				2.45	2.47	2.56					
1800	182	22×25				22×30	25×25			22×40	25×35						
		1.82				2.11	2.11			2.77	2.81						
2200	222	22×30	25×25			22×35	25×30	30×25		22×45	25×40	30×30					
		2.14	2.14			2.44	2.46	2.56		3.15	3.21	3.17					
2700	272	22×35	25×30			22×40	25×35			25×45	30×35	35×30					
		2.49	2.52			2.82	2.86			3.66	3.65	3.77					
3300	332	22×35	25×30	30×25		22×45	25×40	30×30		25×50	30×40						
		2.72	2.74	2.84		3.23	3.29	3.25		4.15	4.18						
3900	392	22×40	25×35			22×50	25×45	30×35				30×45	35×35				
		3.09	3.13			3.62	3.71	3.70				4.67	4.61				
4700	472	22×50	25×40	30×30	35×25		25×50	30×40	35×30			30×50	35×40				
		3.69	3.59	3.54	3.25		4.20	4.23	4.12			5.26	5.23				
5600	562		25×45	30×35				30×45	35×35								35×45
			4.01	4.00				4.70	4.64								5.88
6800	682		25×50	30×40	35×30			30×50	35×40								
			4.52	4.55	4.44			5.27	5.24								
8200	822			30×45	35×35				35×45								
				5.12	5.05				5.89								
10000	103			30×50	35×40				35×50								
				5.78	5.75				6.63								
12000	123				35×45												
					6.47												

Allowable Ripple (A rms) at 85°C 120Hz



■ Dimensions

D×L(mm)

Cap.(μF)	V(Code)	Code	φD	160V(2C)				180V(2Z)				200V(2D)				250V(2E)							
				22	25	30	35	22	25	30	35	22	25	30	35	22	25	30	35				
220	221																	22×25 1.15					
270	271													22×25 1.25				22×30 1.25	25×25 1.25				
330	331													22×30 1.40				22×35 1.45	25×30 1.45				
390	391													22×30 1.60	25×25 1.60			22×40 1.70	25×30 1.70	30×25 1.70			
470	471													22×35 1.80	25×30 1.80			22×45 1.90	25×35 1.90	30×30 1.90			
560	561													22×40 2.00	25×35 2.00	30×25 2.00		22×50 2.15	25×40 2.15	30×30 2.15	35×25 2.15		
680	681													22×45 2.30	25×40 2.25	30×30 2.30		25×45 2.35	30×35 2.35	35×30 2.35			
820	821													22×50 2.50	25×40 2.50	30×30 2.50	35×25 2.50				30×40 2.75	35×35 2.75	
1000	102													22×50 2.80	25×40 2.80	30×30 2.80	35×25 2.80				30×45 3.00	35×40 3.00	
1200	122														25×45 3.25	30×35 3.25	35×30 3.25						35×45 3.50
1500	152															30×40 3.75	35×35 3.75						35×50 4.00
1800	182															30×50 4.00	35×40 4.00						
2200	222																35×45 4.50						
2700	272																35×50 5.15						

Cap.(μF)	V(Code)	Code	φD	400V(2G)				450V(2W)																
				22	25	30	35	22	25	30	35													
56	560																							
68	680																							
82	820																							
100	101																							
120	121																							
150	151																							
180	181																							
220	221																							
270	271																							
330	331																							
390	391																							
470	471																							
560	561																							
680	681																							

Allowable Ripple (A rms) at 85°C 120Hz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminum Electrolytic Capacitors - Snap In](#) category:

Click to view products by [Nichicon](#) manufacturer:

Other Similar products are found below :

[159LBA016M2DC](#) [2151-4-7320](#) [2170-4-7320](#) [380LX333M025K452](#) [MAL205952101E3](#) [450-20-0021](#) [450-20-0020](#) [EET-XB2W221LA](#)
[419-2066-400](#) [MAL219866151E3](#) [EKMS551VSN820MP35S](#) [338LBA035M2BC](#) [380LX680M500J012](#) [381LX101M450H022](#)
[382LX123M080A082](#) [382LX152M500B102VS](#) [382LX272M400B102VS](#) [382LX273M080B082VS](#) [382LXE1366](#) [383LX102M400A082](#)
[383LX222M200A052](#) [383LX223M035A052](#) [383LX561M400A052](#) [383LX821M400A062](#) [MAL215747391E3](#) [MAL219836331E3](#)
[MAL219836151E3](#) [477LBA200M2BF](#) [B41231A5279M000](#) [B41231A8129M000](#) [B41231A9568M000](#) [B41231B5229M000](#)
[B41252A4109M000](#) [B41252A5229M000](#) [B41252A6129M000](#) [B41252B3159M000](#) [B41252B9108M000](#) [B41252C5159M000](#)
[B43540B2108M000](#) [382LX183M063A082](#) [382LX223M050A052](#) [383LX183M063A082](#) [478LBA035M2BD](#) [107LBA450M2BE](#)
[108LBB080M2BC](#) [109LBA035M2DD](#) [109LBB050M2DE](#) [ELH478M080VS3AA](#) [B41231A7159M000](#) [B41231B9478M000](#)