

NOTES:

- ALL DIMENSIONS ARE IN  $\frac{\text{INCHES}}{\text{[MILLIMETERS]}}$
- DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
  - a - AS SUPPLIED
  - b - AFTER UNRESTRICTED RECOVERY
- COATING IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETERS WILL BE REDUCED BY .06 MAX.
- "S" & "T" DIMENSIONS APPLY TO A MINIMUM OF 240° OF CIRCUMFERENCE

| REVISIONS |                           |          |
|-----------|---------------------------|----------|
| LTR       | DESCRIPTION               | DATE     |
| U2        | REVISED PER ECO-14-003735 | 03/05/14 |

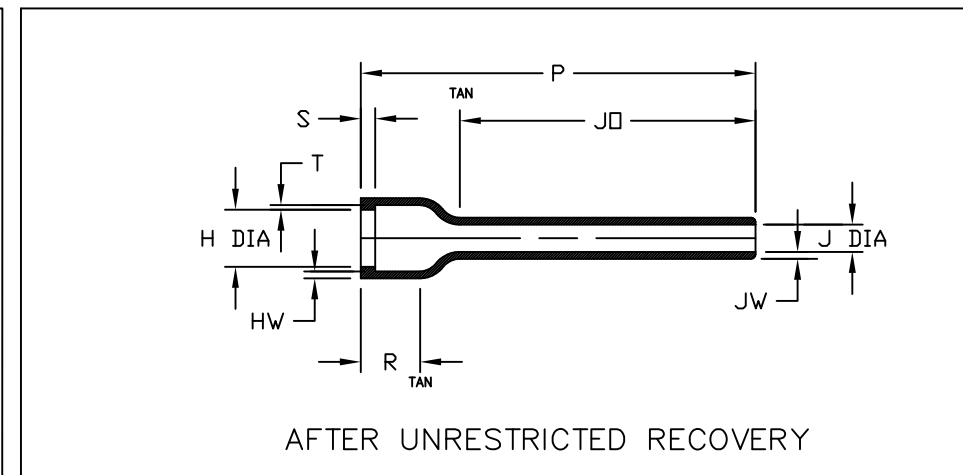


TABLE OF DIMENSIONS

| PART NUMBER | H              |                | J              |               | P<br>±10%<br>b  | R<br>±10%<br>b | JO<br>±10%<br>b | HW<br>+.06/-0.03<br>b | JW<br>±.03<br>b | S<br>+.06/-0.03<br>b | T<br>Ref<br>b |
|-------------|----------------|----------------|----------------|---------------|-----------------|----------------|-----------------|-----------------------|-----------------|----------------------|---------------|
|             | Min            | Max            | Min            | Max           |                 |                |                 |                       |                 |                      |               |
|             | a              | b              | a              | b             |                 |                |                 |                       |                 |                      |               |
| 202F211     | .94<br>[23,9]  | .39<br>[9,9]   | .68<br>[17,3]  | .26<br>[6,6]  | 4.17<br>[105,9] | .46<br>[11,7]  | 3.40<br>[86,4]  | .06<br>[1,5]          | .06<br>[1,5]    | .06<br>[1,5]         | .05<br>[1,3]  |
| 202F221     | 1.07<br>[27,2] | .52<br>[13,2]  | .82<br>[20,8]  | .30<br>[7,6]  | 4.77<br>[121,2] | .48<br>[12,2]  | 3.88<br>[98,6]  | .06<br>[1,5]          | .06<br>[1,5]    | .06<br>[1,5]         | .05<br>[1,3]  |
| 202F232     | 1.22<br>[31,0] | .73<br>[18,5]  | .96<br>[24,4]  | .35<br>[8,9]  | 5.46<br>[138,7] | .48<br>[12,2]  | 4.44<br>[112,8] | .07<br>[1,8]          | .06<br>[1,5]    | .07<br>[1,8]         | .05<br>[1,3]  |
| 202F242     | 1.40<br>[35,6] | .87<br>[22,1]  | 1.13<br>[28,7] | .40<br>[10,2] | 6.28<br>[159,5] | .48<br>[12,2]  | 5.15<br>[130,8] | .07<br>[1,8]          | .06<br>[1,5]    | .07<br>[1,8]         | .05<br>[1,3]  |
| 202F253     | 1.53<br>[38,9] | 1.11<br>[28,2] | 1.24<br>[31,5] | .43<br>[10,9] | 7.00<br>[177,8] | .55<br>[14,0]  | 5.60<br>[142,2] | .07<br>[1,8]          | .06<br>[1,5]    | .07<br>[1,8]         | .07<br>[1,8]  |
| 202F263     | 1.78<br>[45,2] | 1.27<br>[32,3] | 1.51<br>[38,4] | .50<br>[12,7] | 8.00<br>[203,2] | .60<br>[15,2]  | 6.42<br>[163,1] | .07<br>[1,8]          | .06<br>[1,5]    | .07<br>[1,8]         | .07<br>[1,8]  |
| 202F274     | 2.03<br>[51,6] | 1.62<br>[41,1] | 1.79<br>[45,5] | .59<br>[15,0] | 8.00<br>[203,2] | .60<br>[15,2]  | 6.21<br>[157,7] | .07<br>[1,8]          | .07<br>[1,8]    | .07<br>[1,8]         | .07<br>[1,8]  |

ORDERING INFORMATION



IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED.  
CHECK FOR THE LATEST REVISION.

Raychem Molded Parts  
**CUSTOMER DRAWING**

COMPATIBILITY CHART

| MATERIAL DASH NO. | MATERIAL DESCRIPTION | RT SPEC        | COATING SLASH NUMBER | COATING S NUMBER       |
|-------------------|----------------------|----------------|----------------------|------------------------|
| -50               | Flexible, VPB        | RT-1313        | N/A                  |                        |
| -51               | Flexible, EPB        | RT-1321        | /86,/164,/180        | S-1048;S-1124;S-1030/1 |
| -71               | Flexible, Polyolefin | RT-1316        | /42,/86,/180         | S-1017;S-1048;S-1030/1 |
| -770              | NBCCS                | RT-770 TYPE II | N/A                  |                        |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS.  
DECIMAL TOLERANCES  
.XXX ± 0.005 [0.13 mm]  
.XX ± 0.01 [0.25 mm]  
.X ± 0.1 [0.50 mm]  
ANGLE TOLERANCE  
.X ± 1 DEG.

DRAWN  
MMazariegos

APPROVED  
SGravano

THIRD ANGLE PROJECTION



TE Connectivity

TITLE  
Boot, Straight With Lip

SIZE B CODE IDENT. NO. 06090 DWG. NO. 202F211thru274

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Boots](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[618235-000](#) [622A014-3-0](#) [CX4132-000](#) [879103-4](#) [879515-000](#) [889092](#) [982033-2](#) [R280576000](#) [1300830729](#) [MTPSRBCL-C](#) [1811481-1](#)  
[200W531-3-0](#) [202A121-386-0](#) [202A142-4-00/42-0](#) [202A163-4-0-CS5067](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#)  
[202C621710CS5361](#) [202D132-4-07/42-0](#) [202D221-4-0-CS5349](#) [202D221-4-26-0](#) [202D263-25-08-0](#) [202D263-4-22/42-0](#) [202D263-4-88-0](#)  
[202D921-2542-0](#) [202E336-71-0](#) [202F211-50-22-0-CS8474](#) [202F242-50-05-0](#) [202F242-51-04/164-0](#) [202K121-25-CS-1858-0](#) [202K121-25-](#)  
[CS-2062-0](#) [202K132-25-01/225-0CS8387](#) [202K153-3-0186-0](#) [202S132-25-UP-0](#) [203W301-3/42-0](#) [207W613-100/184-0-CS5657](#) [207W623-](#)  
[100-01/184-0](#) [207W634-100/184-0-CS5657](#) [207W656-100-01/184-0](#) [207W667-100-01/184-0](#) [207W667-100/184-0](#) [208A011-3-0](#) [208A021-3-](#)  
[0](#) [221A011-51164-0-CS7133](#) [222A121-2586](#) [222A152-342-0](#) [222A213-25-0-CS5613](#) [222D221-25-13/86-0](#) [222D232-4-61-0-CS5078](#)