


Molded Parts Specification Control Drawing

Part Number : 234A911 thru 971
Description : Boot, Rectangular
Subminiature, 90°
End Entry

NOTES

- All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$; $\frac{\text{lbs}}{[\text{gms}]}$
- Dimensions appearing in table are as follows:
 - a - As Supplied
 - b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- Molding parts are optional. When -00 modification number is specified molding parts will be located as shown.
- Weight shown in table of dimensions is based on polyolefin part.

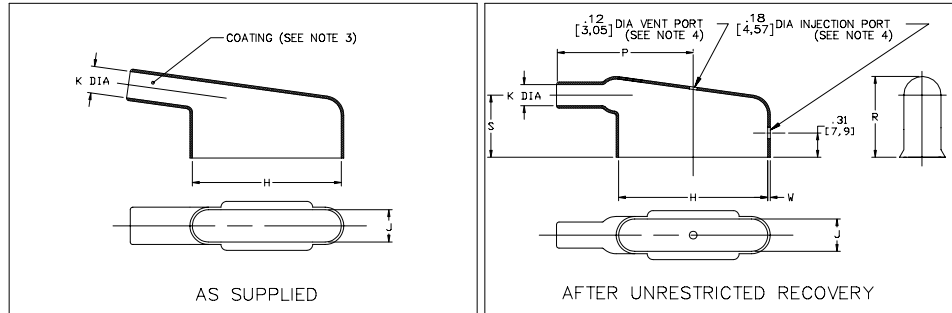

PART NUMBER	H		J		K		P	R	S	W	Weight Nom b	This Boot Fits Cannon-Cinch
	Min a	±5% b	Min a	±5% b	Min a	Max b						
234A911	.83 [21,0]	.80 [20,3]	.49 [12,4]	.42 [10,7]	.31 [7,9]	.16 [4,1]	1.02 [25,9]	.85 [21,6]	.60 [15,2]	.04 [1,02]	.0046 [2,09]	DED-9
234A921	1.15 [29,2]	1.11 [28,2]	.49 [12,4]	.42 [10,7]	.40 [10,2]	.21 [5,3]	1.21 [30,7]	.97 [24,6]	.73 [18,5]	.04 [1,02]	.0055 [2,49]	DAD-15
234A932	1.69 [42,9]	1.66 [42,2]	.49 [12,4]	.42 [10,7]	.55 [14,0]	.32 [8,1]	1.69 [42,9]	1.10 [27,9]	.87 [22,1]	.04 [1,02]	.0099 [4,50]	DBD-25
234A942	2.35 [59,7]	2.31 [58,7]	.49 [12,4]	.42 [10,7]	.68 [17,3]	.34 [8,6]	2.10 [53,3]	1.20 [30,5]	1.00 [25,4]	.04 [1,02]	.0126 [5,72]	DCD-37
234A952	2.26 [57,4]	2.28 [57,9]	.49 [12,4]	.54 [13,7]	.75 [19,1]	.42 [10,7]	2.20 [55,9]	1.27 [32,3]	1.00 [25,4]	.04 [1,02]	.0143 [6,50]	DDD-50
234A961	.83 [21,1]	.80 [20,3]	.49 [12,4]	.42 [10,7]	.31 [7,9]	.16 [4,0]	1.02 [25,9]	.73 [18,5]	.48 [12,2]	.04 [1,02]	.0043 [1,95]	DED-9
234A971	1.15 [29,2]	1.11 [28,2]	.49 [12,4]	.42 [10,7]	.40 [10,2]	.21 [5,3]	1.21 [30,7]	.78 [19,8]	.53 [13,5]	.04 [1,02]	.0052 [2,36]	DAD-15



TYCO ELECTRONICS
307 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : G
Date : 8/21/01


Part Number : 234A911 thru 971
Description : Boot, Rectangular
Subminiature, 90°
End Entry

Molded Parts Specification Control Drawing

Part Number : 234A911 thru 971
Description : Boot, Rectangular
Subminiature, 90°
End Entry

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-3	Polyolefin, Semi-rigid	RT-301	/42;/86	S-1017;S-1048	Adhesive
-4	Polyolefin, Flexible	RT-1304	/42;/86	S-1017;S-1048	Adhesive
-8	Polyolefin, Space	RT-1308	N/A		
-12	*VITON, Flexible	RT-1312	N/A		
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive
-100	Polyolefin, Semi-flexible ZERHAL™	RT-1323	N/A		

*VITON is a Registered Trademark of Dupont

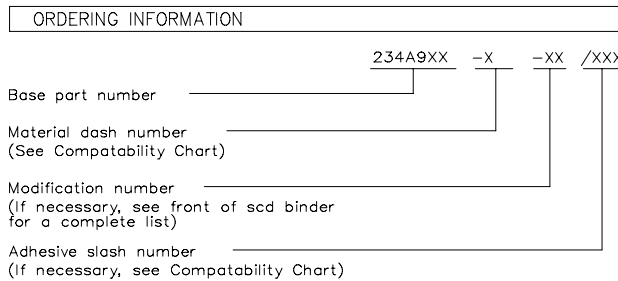

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR
NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION



TYCO ELECTRONICS
307 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : G
Date : 8/21/01

Part Number : 234A911 thru 971
Description : Boot, Rectangular
Subminiature, 90°
End Entry

CAD FILE MP01069

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[770-006S102](#) [5685710001](#) [CR8248-000](#) [CR9960-000](#) [603312-4](#) [607381P039](#) [611112-000](#) [617867N001](#) [6500750004](#) [CZ1420-000](#) [D-306-38](#)
[770-007A303](#) [770-010Y106W1](#) [770-010Y706W1](#) [7771210001](#) [MFP-1/4"-Clear](#) [MFP-3/64"-Clear](#) [790-3012](#) [MFT-MT2000-NO.14-0-SP](#)
[MHHT-4-15K2-G-104](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-](#)
[SP](#) [MIL-LT-3/4-6-SP](#) [MIL-LT-3/8-0-SP](#) [8159270001](#) [839602-000](#) [8423-6](#) [FP301-116-6"-Black](#) [FP301-1/2-48"-Black](#) [FP301-12-48"-Black-](#)
[Hdr](#) [FP301-1/4-48"-Black](#) [FP301-1/4-48"-White-Hdr](#) [FP301-1-6"-Clear](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-](#)
[Bulk](#) [FP301-316-48"-Blue-Hdr](#) [FP301-316-6"-Clear](#) [FP301-332-6"-Black](#) [912229N002](#) [120-126-16BL](#) [121-001-09](#) [121-018-32](#) [121-018-40](#)
[121-123-1-1-32BTC](#) [121-123-1-1-40BTC](#)