


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0366380012](#)  
**Status:** **Active**  
**Overview:** CMC and CMX Sealed, Hybrid, Modular Connectors  
**Description:** 2.50mm, 3.50mm CMC Header, Right-Angle, 96 Position, 96 loaded, 2 Port, Black and Brown, Peg, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-36638-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-36638-003 (PDF)</a>
<a href="#">Product Specification PS-36638-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-36638-001-001 (PDF)</a>	

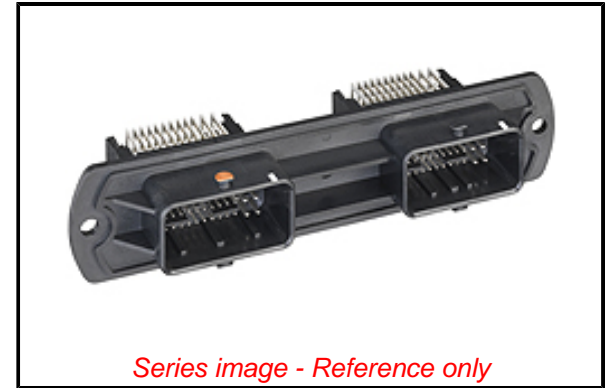

**General**

Product Family	PCB Headers
Series	36638
Application	Power, Wire-to-Board
Comments	Carton Box Packing, Carton Box Packing
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC
UPC	800756747583

**Physical**

(p)ower-(s)ignal Configuration	16p - 80s
Breakaway	No
Circuits (Loaded)	96
Circuits (maximum)	96
Circuits Detail	16 x 1.5mm & 80 x 0.635mm terminals
Color - Resin	Black
Durability (mating cycles max)	20
First Mate / Last Break	Yes
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height	6.70mm
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	116.886/g
Number of Rows	4
Orientation	Right Angle
PC Tail Length	2.90mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Carton
Pitch - Mating Interface	2.50mm, 3.50mm, 3.70mm
Plating min - Mating	4.064µm
Plating min - Termination	4.064µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Solder or Weld

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
-ED/88/2018 (15  
January 2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[36638](#) Series

**Mates With**

CMC Receptacle Connector [643201319](#) ,  
[643203311](#)

**Use With**

CMC Receptacle Connector [643201319](#) ,  
[643203311](#) , CMC CP Terminals [64322](#) ,  
[64323](#) , CMC Blind Plug for CP Terminal  
[64325](#) , Wire Cap [643191201](#)

**Electrical**

Current - Maximum per Contact 6.0A  
Voltage - Maximum 14V DC

**Solder Process Data**

Lead-free Process Capability N/A

**Material Info****Reference - Drawing Numbers**

Application Specification AS-36638-001-001  
Packaging Specification PK-36638-001, PK-36638-003  
Product Specification PS-36638-001-001  
Sales Drawing SD-36638-001

This document was generated on 04/30/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [600858](#) [60403001](#) [60993906-B](#) [60993913-B](#) [629515004020001](#) [M902-2131](#) [M902-2161](#) [M902-2344](#) [72.330.1035.1](#)  
[73.353.4028.0](#) [F118010](#) [F119300-B](#) [F132210](#) [F132210-B](#) [F166900](#) [F180100](#) [F258300](#) [F258300-B](#) [F294300-B](#) [F339100](#) [F339700](#) [F358300-](#)  
[B](#) [F374110](#) [F407400](#) [F412210](#) [F427600](#) [F444110](#) [F487000](#) [F495100-B](#) [F500900-B](#) [F509500B-B](#) [770444-1](#) [776880-1](#) [827153-1](#) [881735-1](#)  
[8N1515-32-24P](#) [9-1326727-8](#) [9-1326729-8](#) [925467-1](#) [925474-1](#) [928905-1](#) [936398-2](#) [964562-1](#) [964562-4](#) [964731-2](#) [965051-1](#) [968782-1](#)  
[GT17SA-8DS-HU](#) [GT17VS-10DP-5.2CF](#)