

## Cable duct - CD-HF 60X80 - 3240354

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable duct, light gray, halogen-free, consisting of upper part and mounting base, width: 60 mm, height: 80 mm, length: 2000 mm

The illustration shows the version in gray

### Product Features

- Predetermined breaking point enables tool-free, burr-free removal of bars
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Fast and seamless creation of T and cross connections by means of an additional predetermined breaking point in the cable duct base
- Cover is securely held in place for both horizontal and vertical mounting
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Custom tariff number	39259020
Country of origin	Germany

### Technical data

#### Dimensions

Length (b)	2000 mm
Width (a)	60 mm
Height	80 mm

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C
---------------------------------	------------------

#### General

Color	light gray
-------	------------

# Cable duct - CD-HF 60X80 - 3240354

## Technical data

### General

Components	Halogen-free
Flammability rating according to UL 94	V0
Material	PC/ABS

### Standards and Regulations

Halogen-free	yes
Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27140602
eCl@ss 4.1	27140602
eCl@ss 5.0	27140602
eCl@ss 5.1	27140602
eCl@ss 6.0	27400703
eCl@ss 7.0	27400703
eCl@ss 8.0	27400703

### ETIM

ETIM 2.0	EC000012
ETIM 3.0	EC000012
ETIM 4.0	EC000012
ETIM 5.0	EC000012

### UNSPSC

UNSPSC 6.01	30101815
UNSPSC 7.0901	30101815
UNSPSC 11	30101815
UNSPSC 12.01	30101815
UNSPSC 13.2	30101815

## Approvals

### Approvals

---

## Cable duct - CD-HF 60X80 - 3240354

### Approvals

Approvals

CSA / UL Recognized / VDE Zeichengenehmigung

---

Ex Approvals


---


Approvals submitted

---

### Approval details

CSA 

UL Recognized 

VDE Zeichengenehmigung 

### Accessories

Accessories

Cover

Cover profile - CD-HF COVER 60 - 3240372



Cover for cable duct, light gray, halogen-free, width: 60 mm, length: 2000 mm

---

Filler plug

## Cable duct - CD-HF 60X80 - 3240354

### Accessories

Fastening clip - RVT-PA 4 - 3240498



Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 ... 6 mm

---

Fastening clip - RVT-PA 6 - 3240499



Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 ... 6 mm

---

### Riveting tools

Tool - UNIFOX-RVT P 4 - 1212478



Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets

---

Tool - UNIFOX-RVT P 6 - 1212509



Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

---

### Wiring duct

Universal wire retaining clip - CD WR - 3240284



Universal wire holding bracket, perforated, for wiring channels


## Cable duct - CD-HF 60X80 - 3240354

### Accessories

---

### Drawings

Dimensional drawing

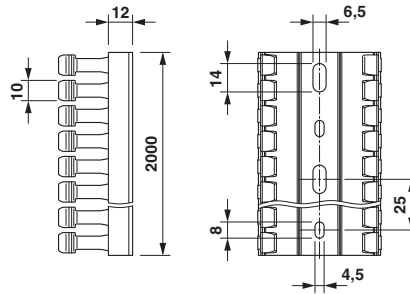

Base perforation according to DIN EN 50085

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Ducting](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[66200A-10](#) [CVED32VEPG](#) [CVED40VEPG](#) [F512D5-5F140Y](#) [F512D5-5F200Y](#) [F512D5-5F26Y](#) [F512D5-5F30Y](#) [F512D5-5F33Y](#) [F512D5-5F34Y](#) [F512D5-5F45Y](#) [F512D5-5F50Y](#) [F512D5-5F54Y](#) [F512D5-5F66Y](#) [F512D5-5F70Y](#) [F512D5-5F75Y](#) [F512D5-5F90Y](#) [F612D5-5F100Y](#) [F612D5-5F130Y](#) [F612D5-5F50Y](#) [F612D5-5F56Y](#) [F612D5-5F58Y](#) [F6L12D5-5F46](#) [F912D5-5F11Y](#) [F912D5-5F170Y](#) [F912D5-5F175Y](#) [F912D5-5F230Y](#) [F912D5-5F300Y](#) [F912D5-5F55Y](#) [F912D5-5F56Y](#) [F912D5-5F63Y](#) [F912D5-5F6Y](#) [F912D5-5F75Y](#) [F912D5-5F85Y](#) [F912D5-5F86Y](#) [F912D5-5F88Y](#) [F912D5-5F96Y](#) [FAP0047WBLMTP](#) [FAP12WBRDRDDLZ](#) [FAP12WDYLYLDLZ](#) [FAP12WEORORDLZ](#) [FAP6WEORORDLZ](#) [FAP6WFDBDBDLZ](#) [FAP8WEORORDLZ](#) [FCE2UWCL](#) [800A-LB](#) [802A-ECSP](#) [802I-ICSP](#) [FJQADH](#) [FJQFXT](#) [PED10](#)