

Safety Relay

OA 5621 / OA 5621S

Features


- 4 output contacts
- International approvals: TÜV, UL, cUL
- Quality control check for each safety relay
- Forced-guided contacts, all gold flash plated
- Contact Gap > 0.5 mm throughout life of relay
- Various contact materials, mixed contact material optional
- High coil voltage range
- High breakdown voltage: contact/coil \geq 4 KV
contact/contact \geq 4KV
- High creeping distance: contact/coil \geq 5.5 mm
contact/contact \geq 5.5 mm
- Protection Rating IP 67, washable
- Custom design available,
 - coil voltage
 - coil resistance,
 - contact pressure
 - operate/release time
 - gold plated double contacts
- S-Type
higher external clearance and creeping distance:
contact/contact \geq 7.5 mm




Technical Data

- **Nominal Coil Voltage** 6, 12, 24, 48, 60, 110, DC
- **Coil Power Dissipation** 0.6 W
- **Max. Switching Voltage** 250V DC, 400V AC
- **Max. Switching Current** 8 A (3 x 8A simultaneous)
- **Max. Switching Power — DC** 200W
- **Max. Switching Power — AC** 2000VA
- **Contact Switching Rate** 10 operations per second
- **Relay Operate Time** 12 ms
- **Relay Release Time** 8 ms
- **Operation Vibration** 0.35 mm Ampl. max
@ 10...200Hz, 5g max
- **Contact Arrangements** 3NO/1NC, 2NO/2NC
- **Contact Material** AgNi10+0.2 μ mAu Standard
AgSnO₂+0.2 μ mAu, AgNi10+5 μ mAu Optional
- **Mechanical Life** >20x10⁶ operation cycles
- **Electrical Life** AgSnO₂ >1.5x10⁵, AgNi10 >1.0x10⁵
operation cycles @ 230V AC, 8A, cos φ =1
- **Ambient Temperature** -40...+80°C
- **Cover Material** Polyamide 6
- **Weight** 35 g
- More detailed data upon request


Diagrams




Relay operation voltage vs. ambient temperature



Limitation factor for inductive loads

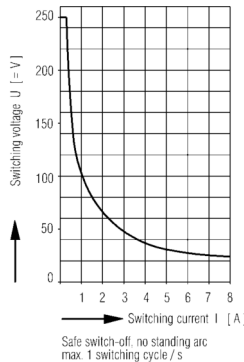

Maximum switching power curve

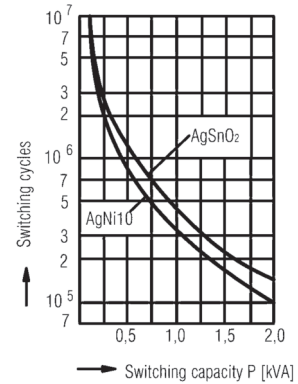

Mechanical life

Safety Relay OA 5621 / OA 5621S Data





Relay Data			Ordering Information			
Rated Voltage	Voltage Range	Coil Resistance (10%)	3 NO/1 NC Type	2 NO/2 NC Type	3 NO/1 NC S-Type	2 NO/2 NC S-Type
6V	4.5 - 8.4V	60 Ω	56.OA21.0631 □	56.OA21.0622 □	56.OA21S.0631 □	56.OA21S.0622 □
12V	9.0 - 16.8V	240 Ω	56.OA21.1231 □	56.OA21.1222 □	56.OA21S.1231 □	56.OA21S.1222 □
24V	18.0 - 33.6V	960 Ω	56.OA21.2431 □	56.OA21.2422 □	56.OA21S.2431 □	56.OA21S.2422 □
48V	36.0 - 67.2V	3840 Ω	56.OA21.4831 □	56.OA21.4822 □	56.OA21S.4831 □	56.OA21S.4822 □
60V	45.0 - 84.0V	6000 Ω	56.OA21.6031 □	56.OA21.6022 □	56.OA21S.6031 □	56.OA21S.6022 □
110V	82.5 - 154.0V	20000 Ω	56.OA21.1131 □	56.OA21.1122 □	56.OA21S.1131 □	56.OA21S.1122 □

Contact Material, Example: □ AgSnO₂+2μmAu

□ AgNi10+2μmAu


□ AgNi10+5μmAu

Footprints (solder side)

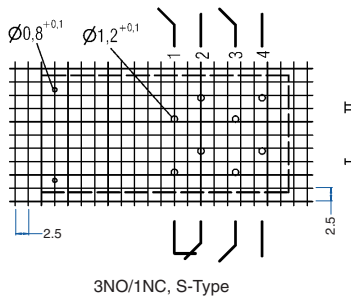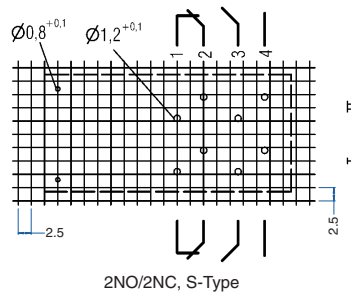

Dimensions

S-Type

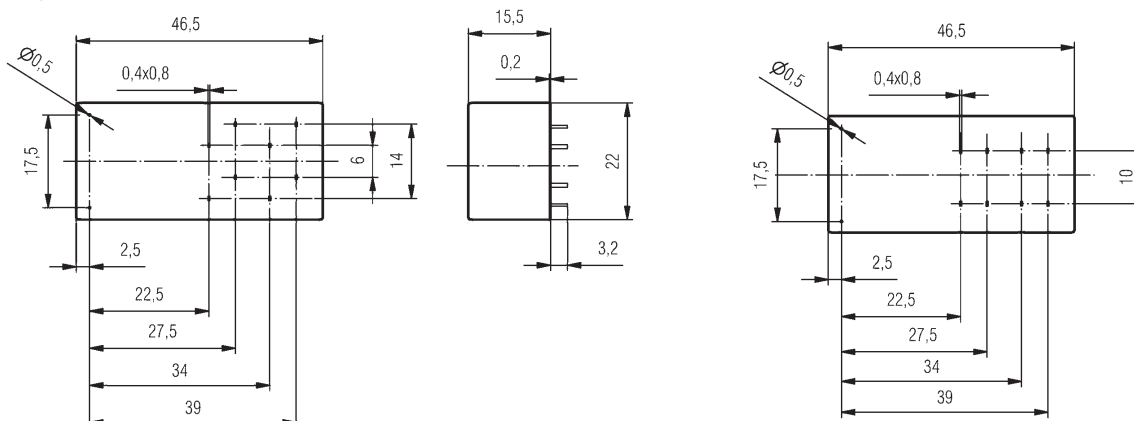

Note: All dimensions are shown in millimeters. To convert to inches, divide by 25.4.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Safety Relays](#) category:

Click to view products by [Altech](#) manufacturer:

Other Similar products are found below :

[7-1618103-5](#) [1351-1X](#) [1618089-2](#) [C200HDA003](#) [C200HMR432](#) [C200HMR832](#) [C200HMR833](#) [20-050-36X](#) [C500OD415CN](#) [2-1618068-0](#)
[25994](#) [9-1618103-2](#) [SP10-ETL01](#) [21-890](#) [3-1618060-0](#) [C200HNC112](#) [C200HOD214](#) [C500CN812N](#) [1100X](#) [1100-42X](#) [1-1618062-0](#) [6-](#)
[1618082-4](#) [7-1618103-6](#) [50.12.9.110.1000](#) [SP16DRD](#) [SP16DRA](#) [XPSAXE5120P](#) [XPSECPE5131P](#) [C500-CE243](#) [607.5111.020](#) [439390016](#)
[607.5111.009](#) [607.5111.010](#) [PSR-MM25-1NO-2DO-24DC-SC](#) [NXSL5500](#) [600PSR-165/300-CU](#) [SR4D4110](#) [J73KN-AM-22](#) [G7SA-3A1B](#)
[DC12](#) [G7SA-4A2B](#) [DC12](#) [G7SA-3A1B](#) [DC48](#) [G7SA-2A2B](#) [DC48](#) [ES-FA-9AA](#) [50.12.9.024.5000](#) [44510-2310](#) [V23047-A1036-A501](#) [44510-](#)
[1081](#) [44510-2021](#) [44510-2232](#) [WUF-12-5060-T](#)