

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6) C-19
230/400V / 32A / THREE-PHASE WYE POU

| | |
|-----------------|--------------|
| <u>PART NO.</u> | <u>COLOR</u> |
| VB0D2P3BN30P1 | BLACK |

2. ACCESSORY COMPONENTS:
(4) M6 x 20mm MOUNTING SCREWS
(4) #12-24 x 1/2" MOUNTING SCREWS
(2) #10-32 LOCKING COLLAR SCREWS
(2) L-BRACKETS

3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).

4. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, GOST AND IS CE & C-TICK MARKED.

5. RoHS COMPLIANT.


6. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.

7. MAXIMUM AVAILABLE INPUT POWER = 22.1 KW


8. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

| | |
|---------------|----------------|
| PANDUIT P/N | WEIGHT |
| VB0D2P3BN30P1 | 17 lb (7.7 kg) |

TOOLLESS MOUNTING
BUTTON 2X

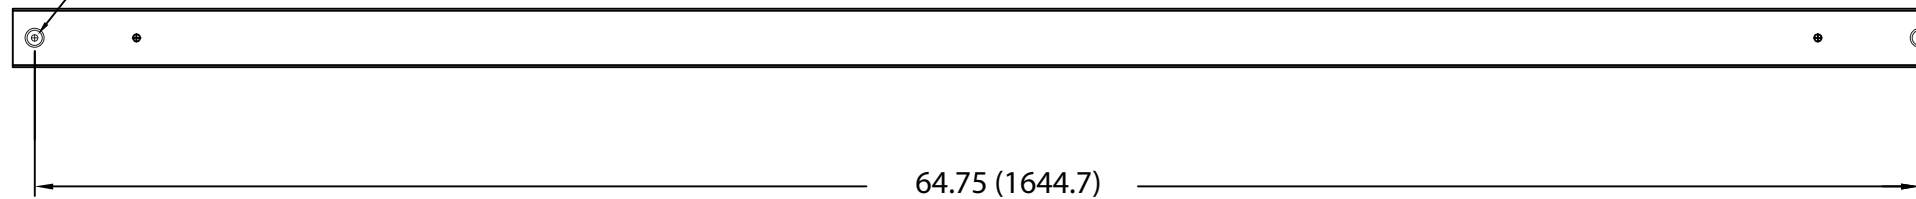


TOOLLESS MOUNTING BUTTON LOCATION

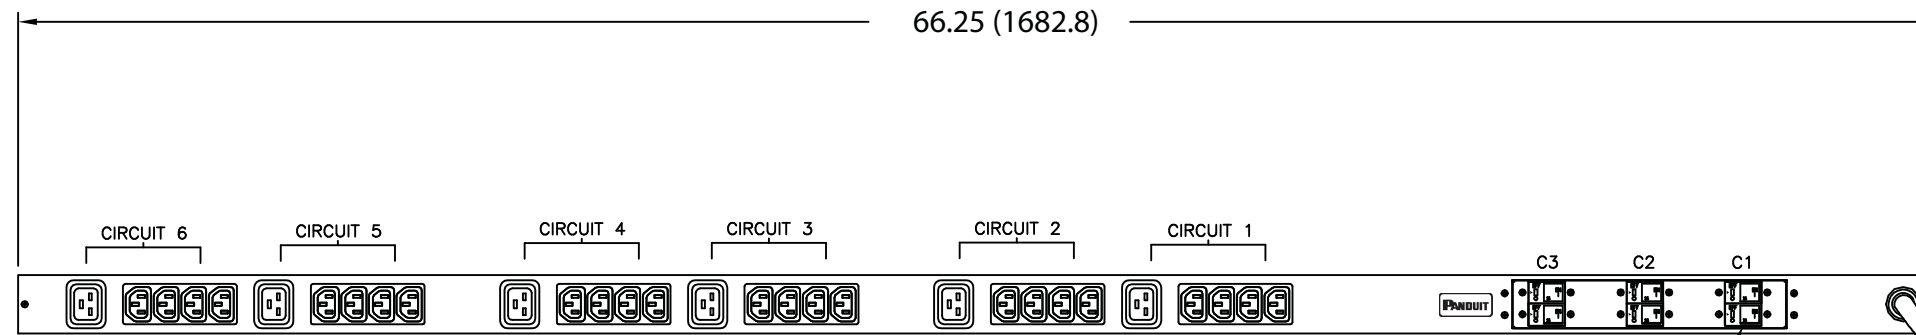

16 AMP, SINGLE POLE UL LISTED ELECTRO
MECHANICAL SWITCH/BREAKER
6 PLACES

3 METER INLET POWER CORD

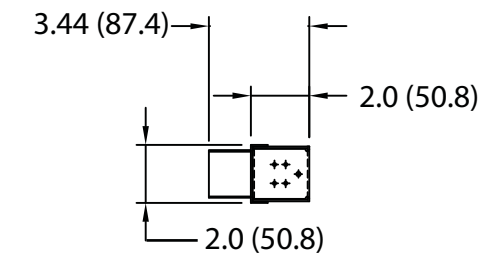

| | |
|--|--|
| | PLUG 32 AMP, 230/400V x 3~ WYE 4P/5W IEC 60309, SPLASHPROOF |
| | TWENTY-FOUR (24) RECEPTACLES 10 AMP, 250V STRAIGHT BLADE IEC 60320/C13 |
| | SIX (6) RECEPTACLES 16 AMP, 250V STRAIGHT BLADE IEC 60320/C19 |

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|---------|------|------|---------------------------------------|----------|---|------|-----|-----|
| 02A | 3-7-14 | MRWA | | C. UPDATED CIRCUIT BREAKERS | 09V098HJ | | | | |
| 01A | 8-15-12 | PIP | MRWA | A. UPDATED NOTE #7. B. ADDED NOTE #8. | 09V098HJ | | | | |
| 00A | 2-10-11 | MAV | KRKE | RELEASED TO PRODUCTION | 09V098HJ | | | | |

| | | |
|---|---------------------|--|
| MODEL FILENAME | 09V098HJ/02.PRT | |
| CAD FILENAME/LAYERS | 09V098HJ_DC/02A.PRT | |
| PANDUIT CORP TINLEY PARK, ILLINOIS | | |
| VERTICAL, MIXED (24) C-13 & (6) C-19 POWER OUTLET UNIT CUSTOMER DRAWING | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: | | UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION |
| INCHES | ± 0.03 | [METRIC - MILLIMETER] ANGLE |
| X.X | ± 0.015 | X.X ± 0.8 |
| X.XX | ± 0.005 | X.XX ± 0.4 |
| X.XXX | | X.XXX ± 0.13 |
| DRAWN BY | MAV | MAT'L: |
| DATE | 2-10-11 | SCALE |
| CHK'D | KRKE | NONE |
| DRAWING NO. | | DWG |
| 09V098HJ | | B |
| | | SIZE |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Outlet Strips](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[G20IG606](#) [1301430288](#) [1301530208](#) [1302100069](#) [1301430321](#) [1301530054](#) [1447B163](#) [1585T16A1RA](#) [UL602CB-6](#) [UL7408-6](#) [ULHC4-15](#)
[V20IG606](#) [UL2063BD](#) [TSB](#) [1301530203](#) [4748.03](#) [4309](#) [UL7208-15](#) [3083](#) [3050F](#) [3090](#) [1301530132](#) [1301530117](#) [1301530164](#) [1301530050](#)
[1301530141](#) [1301430252](#) [1301530179](#) [1301530065](#) [1301350158](#) [1301530052](#) [1301530068](#) [1301530120](#) [HB0B1L4BT08W1](#)
[VB0D2B2BM30P1](#) [HA0A1D0CA10E1](#) [HA0A1M2CM10E1](#) [HA1A1D0CA10E1](#) [VB0B1L2BN24H1](#) [PN1A1C0BA10E1](#) [HA0B1E0CA1081](#)
[HA0D2U0CA1081](#) [HA0D2A0CA1081](#) [HA1D2U0CA1081](#) [HA1D2A0CA1081](#) [HB1B2J0AA10M1](#) [LZ1D2A0FA0AJ1](#) [LZ1D2P0FA0AL1](#)
[VB0B1L4CN48M1](#) [MA002](#)