



- Features :
 - 2:1 wide input range
 - 4:1 wide input range(optionl)
 - 1000VDC I/O isolation
 - 3000VDC I/O isolation(option)
 - Built-in EMI filter
 - Protections: Short circuit / Overload
 - Cooling by free air convection
 - Six-sided shield metal case
 - 100% burn-in test
 - Low cost / High reliability
 - Approvals: FCC / CE
 - 2 years warranty




SPECIFICATION

ORDER NO.		DKE15A-05	DKE15B-05	DKE15C-05	DKE15A-12	DKE15B-12	DKE15C-12	DKE15A-15	DKE15B-15	DKE15C-15	DKE15A-24	DKE15B-24	DKE15C-24	
OUTPUT	DC VOLTAGE	±5V			±12V			±15V			±24V			
	CURRENT RANGE	±150 ~ ±1500mA			±62.5 ~ ±625mA			±50 ~ ±500mA			±31.3 ~ ±313mA			
	RATED POWER	15W												
	RIPPLE & NOISE (max.) Note.2	50mVp-p			60mVp-p			60mVp-p			80mVp-p			
	LINE REGULATION Note.3	±0.3%												
	LOAD REGULATION Note.4	±0.5%												
	VOLTAGE ACCURACY	±2.0%												
	SWITCHING FREQUENCY	150KHz min.												
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18~36VDC C: 36~72VDC												
	EFFICIENCY (Typ.)	81%	83%	79%	82%	83%	82%	82%	83%	82%	82%	84%	85%	
	DC CURRENT	Full load	A: 1700mA B: 800mA C: 400mA											
		No load	A: 40mA B: 20mA C: 10mA											
	FILTER	Pi network												
PROTECTION	Fuse recommended													
PROTECTION (Note. 5)	OVER CURRENT	160% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed												
ENVIRONMENT	WORKING TEMP.	-25~+71°C (Refer to output load derating curve)												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:1KVDC												
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH												
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A												
OTHERS	MTBF	300Khrs min. MIL-HDBK-217F (25°C)												
	DIMENSION	50.8*50.8*11.0mm or 2"*2"*0.43" inch (L*W*H)												
	WEIGHT	65g												

Mechanical Specification


Unit: mm (inch)

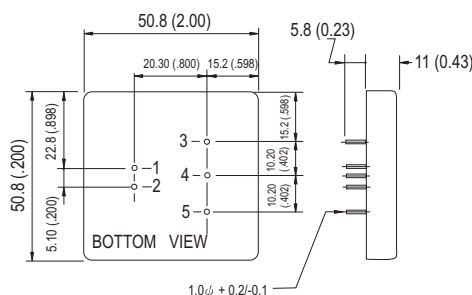

Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	COM
5	-Vout

Derating Curve

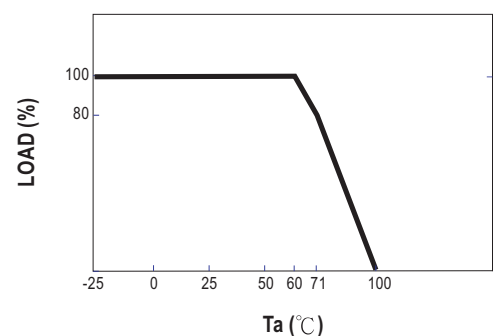

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Mean Well](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [SSQE48T25025-NAA0G](#) [L-DA20](#) [HP3040-9RG](#) [HP1001-9RTG](#) [XKS-2415](#) [XKS-2412](#)