

18 Series

RoHS
Compliant


NYLON 6.6

GENERAL PURPOSE

MATERIAL OPERATING TEMPERATURE: -40°C to +85°C

APPLICATION OPERATING TEMPERATURE: -10°C to +85°C


APPROVALS¹: 

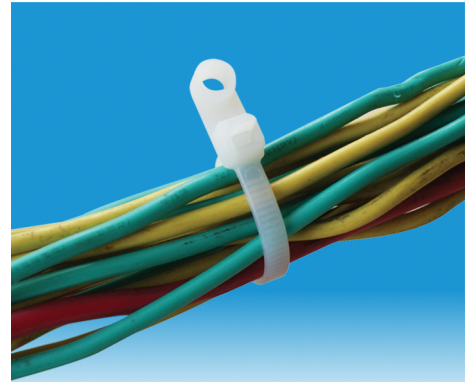

Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]	Fastener
M - 18lb					
18-M110	2.5 [.098]	110 [4.3]	19.0 [0.75]	8 [18]	M2.5 [#4]
I - 40lb					
18-I150	3.6 [.14]	150 [6.0]	35.5 [1.40]	18 [40]	M4 [#8]
S - 50lb					
18-S160	4.8 [.189]	160 [6.3]	36.8 [1.45]	22 [50]	M5 [#10]
18-S200	4.8 [.189]	200 [8.0]	49.8 [1.96]	22 [50]	M5 [#10]
18-S305	4.8 [.189]	305 [12.0]	82.8 [3.26]	22 [50]	M5 [#10]
18-S370	4.8 [.189]	370 [14.5]	103.8 [4.09]	22 [50]	M5 [#10]
HD - 120lb					
18-HD305	7.6 [.300]	305 [12.0]	78.7 [3.10]	55 [120]	M6 [#1/4]
18-HD400	7.6 [.300]	400 [15.7]	109.2 [4.30]	55 [120]	M6 [#1/4]

Notes:
1. 18-M110, is not UL approved

PART NUMBER SYSTEM



SERIES

CROSS SECTION


LENGTH

MATERIAL/COLOR

- N: Natural
- B: Normal UV Black

PACKAGE SIZE

- C: 100PCS
- Number: Other Quantity

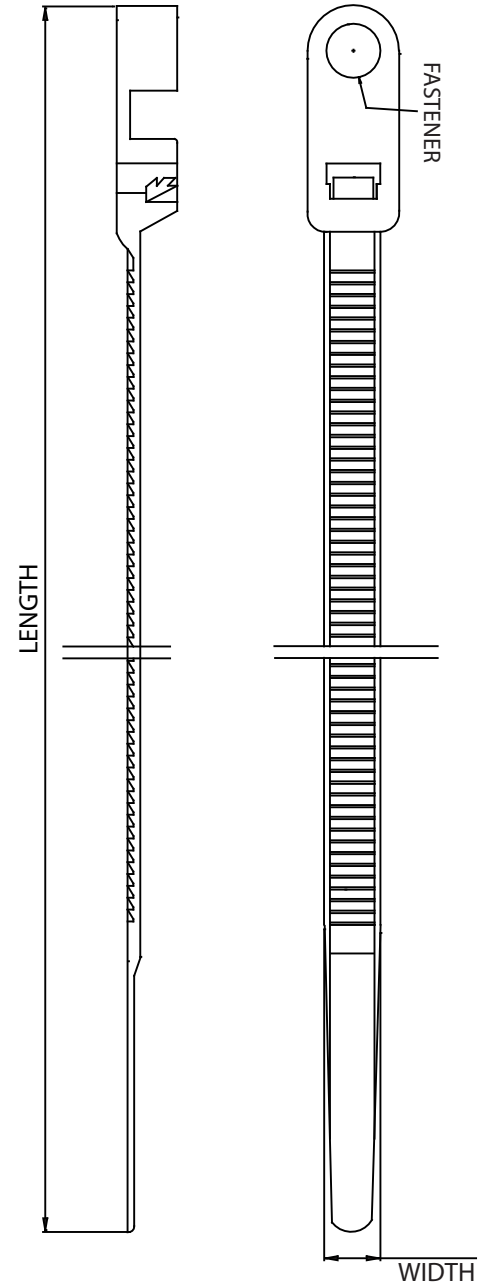

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Qualtek](#) manufacturer:

Other Similar products are found below :

[20093-0](#) [SJ-3463](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [20113-0](#)
[T56137](#) [3-350087-0](#) [CTB75X75BKA-C](#) [3722](#) [561-B110120](#) [561-EZAB580T](#) [561-EZS375B40](#) [561-N3510](#) [561-TA250125](#) [08350-0](#) [08443-0](#)
[08600-0](#) [10035-0](#) [10036-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ500](#) [561-EZ625](#) [561-EZ750](#) [561-TA00600](#) [SJ3519FR](#)
[BLACK 1X50](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [157-00039](#) [3719](#) [SJ-3401 BLACK 1"](#) [08445-0](#)
[08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10056-0](#) [10620-0](#) [10345-0](#) [10344-0](#) [08416-0](#) [08384-0](#) [08401-0](#)