

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2008  
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		#	LR	DESCRIPTION	DATE	DRN	APPD
DW		C6		REVISED (ECR-15-013726)	1MAR2016	A.X	H.W


OBSOLETE

7-1734038-1
6-1734038-1
5-1734038-1
4-1734038-2
3-1734038-3
3-1734038-2
3-1734038-1
2-1734038-1
1-1734038-2
1-1734038-1
1734038-3
1734038-2
1734038-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN F. YANG 31.JUL.2009	 TE Connectivity	
		CHK S. CHIEN 31.JUL.2009		
DIMENSIONS: MM		APRD W. KODAMA 31.JUL.2009	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		USB CONNECTOR, RECEPTACLE, R/A, A TYPE
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± ± 3' FINISH		APPLICATION SPEC		
MATERIAL	SEE NOTE	WEIGHT 1.82 GRAMS	SIZE A3	GAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=1734038	RESTRICTED TO
			SCALE	SHEET 1 OF 4
				REV C6

LOC	DIST	REVISIONS			
P	LYR	DESCRIPTION	DATE	DM	APVD
SEE SHEET 1.					

TE LOGO & DATE CODE




NOTES:


- MATERIAL:  
HOUSING: (SEE TABLE) WITH 30% GF, UL 94V-0. BLACK COLOR.  
CONTACT: PHOSPHOR BRONZE.  
SHELL: BRASS.
- FINISH:  
CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.  
3.048µm [120µ"] MIN. MATTE TIN PLATING ON SOLDER TAIL.  
WITH ENTIRE CONTACT UNDERPLATED 1.270µm [50µ"] MIN. NICKEL.  
SHELL: 0.762µm [30µ"] MIN. NICKEL PLATING OVER 0.762µm [30µ"] MIN. Cu UNDERPLATED.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

NO BOARD LOCK FUNCTION APPLIED.




LOW HALOGEN SPECIFICATION:  
CHLORINE(Cl): 900ppm MAX.  
BROMINE(Br): 900ppm MAX.

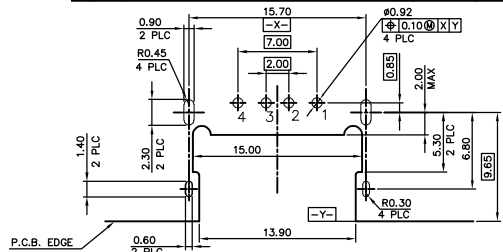

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)  
(COMPONENT SIDE) TOLERANCE±0.05

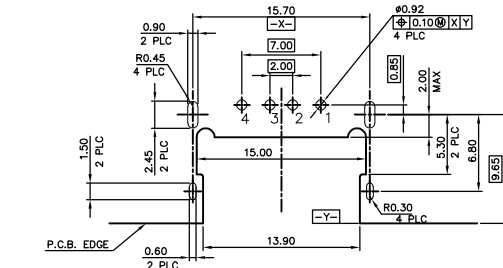

RECOMMEND P.C.B LAYOUT (THICKNESS=1.0~1.4mm) ▲  
(COMPONENT SIDE) TOLERANCE±0.05






OBSOLETE	TAPE & REEL	2.40	2.55	2.10	HTN	B-1734038-4
	PACKAGING	1.80	1.80	1.80	PAGT	B-1734038-4
		2.40	2.55	2.10		B-1734038-4

THIS DRAWING IS A CONTROLLED DOCUMENT.




DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±.2 2 PLC ±.2 3 PLC ±.15 4 PLC ±.15 ANGLES ±.3°	DM	
		CHK	
MATERIAL	FINISH	APVD	
		PRODUCT SPEC	
SEE NOTE	SEE NOTE	NAME	
		TE Connectivity	
		USB CONNECTOR, RECEPTACLE, R/A, A TYPE	
		SIZE	A300779
		CAGE CODE	C=1734038
		DRAWING NO	
		RESTRICTED	NO
		CUSTOMER DRAWING	
		SCALE	
		SHEET	2 of 4
		REV	C6

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2008  
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
#	LTR	DESCRIPTION	DATE	DNM	APVD
SEE SHEET 1.					

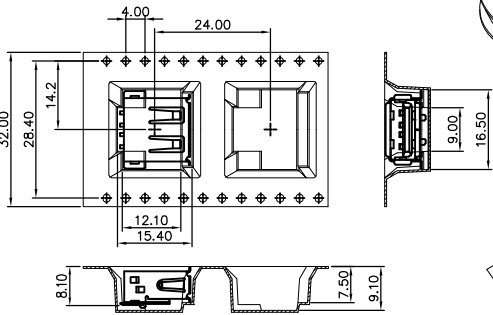

- NOTES:  
 1. MATERIAL:  
 REEL: PS.  
 CARRIER: PS.  
 COVER TAPE: PBT.  
 2. DIMENSION  
 REEL: #330mmX37.1mm  
 SHIPPING CARTON: L=350mm,W=350mm,H=250mm  
 3. QUANTITY:  
 PRIMARY PACKING: 300PCS/REEL  
 SECONDARY PACKING: 9REELS/CARTON(2,700PCS).  
 4. WEIGHT:  
 NET WEIGHT: 0.46KG/REEL, 4.15 KG/CARTON.  
 GROSS WEIGHT: 0.97 KG/REEL, 9.7 KG/CARTON.  
 5. PEELING RESISTANCE: 20G TO 130G.  
 6. PEELING SPEED: 300MM/MIN.






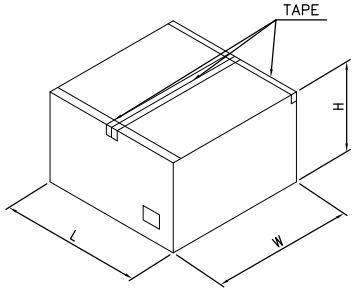
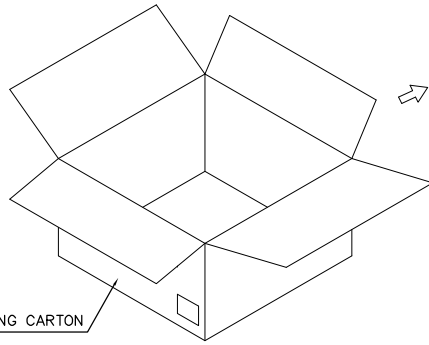


OBSOLETE 6-1734038-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN		TE Connectivity	
DIMENSIONS: MM		DW			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .05 1 PLC ± .04 2 PLC ± .03 3 PLC ± .02 4 PLC ± .01 5 PLC ± .01 6 PLC ± .01 ANGLES ± .01 FINISH		PRODUCT SPEC APPLICATION SPEC WEIGHT		NAME USB CONNECTOR, RECEPTACLE, R/A, A TYPE	
MATERIAL		CUSTOMER DRAWING		SIZE: A300779 CAGE CODE: C=1734038 DRAWING NO: C=1734038	
				RESTRICTED TO SCALE: SHEET 3 of 4 REV C6	

LOC	DIST	REVISIONS			
REV	DATE	DESCRIPTION	DATE	DRW	APVD
1		SEE SHEET 1.			

PULL OUT DIRECTION

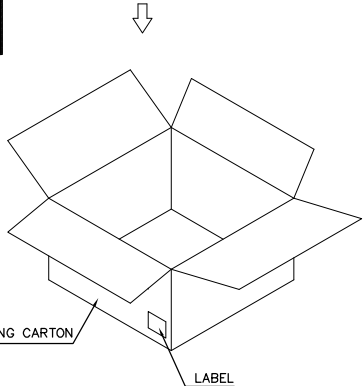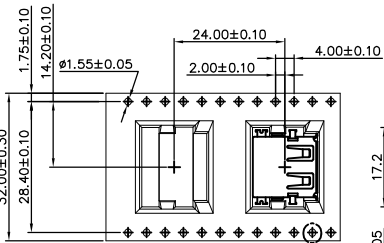

- NOTES:
1. MATERIAL:  
REEL: PS.  
CARRIER: PS.  
COVER TAPE: PBT.
  2. DIMENSION  
REEL: Ø330mmX37.1mm
  3. PEELING RESISTANCE: 20G TO 130G.
  4. PEELING SPEED: 300MM/MIN.

TAPE & REEL	8.92 Kg	4.91 Kg	350	9	3150 PCS	8-1734038-4
PACKAGING	GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER
						8-1734038-4

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM			
0 PLC	± .		
1 PLC	± .		
2 PLC	± .		
3 PLC	± .		
4 SDC	± .		
MATERIAL		FINISH	

DWG	CHK	APVD	NAME
PRODUCT SPEC	USB CONNECTOR, RECEPTACLE, R/A, A TYPE		
APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
WEIGHT	A3	300779	C=1734038
CUSTOMER DRAWING	SCALE	SHEET	REV
		4 of 4	C6

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[10033527-N3112MLF](#) [17-210561](#) [GMCB05B11124H1EU](#) [17-200931](#) [65-647-8-BK-BU](#) [690-010-295-484](#) [73725-1191BLF](#) [950](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBB15131](#) [MUSBC111M5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMTBS1NBTR](#) [30-498-6](#) [SK-60A-2](#) [17-200261](#) [17-210051](#) [1734082-1](#) [FK-37-32SL](#) [30-1574](#) [30-470](#) [30-489](#) [30-572-3](#) [30-9503](#) [M9177/2-1](#) [MAB 5 S](#) [MIKROE-1451](#) [33UBBR-04SW11R](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SLAS1N-W30](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBC11135](#) [33UBAR-04SW11](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#)