


Blanking Foam Strips

specifications

Blanking foam strips shall be used to minimize gaps in and around network cabinets and prevent bypass air to improve energy efficiency and optimize the cooling system in Cold Aisle Containment (CAC) or Vertical Exhaust Duct (VED) applications. The blanking foam strips shall be adhesive-backed foam and conform to a large variety of non-standard configurations, especially those smaller than one rack unit.



technical information

Material:	1/16" (1.6mm) thick closed-cell vinyl foam
Adhesive properties:	Removable and repositionable acrylic-based adhesive on paper release liner
Temperature/humidity range:	50°F – 158°F (10°C – 70°C); 60% relative humidity
RoHS compliance:	Yes
Packaging:	4.00" (101.6mm) x 100.00" (2540.0mm) roll of product with perforations

key features and benefits

Prevents bypass airflow	Suitable to seal inconsistently sized openings that do not conform to standard blanking solutions
Removable/repositionable adhesive	Prevents residue on network equipment when adhesive-backed foam is removed
Closed cell vinyl foam material	Durable foam product withstands application environment to allow safe installation within the data center
Perforation design	Perforations provided every 1.00" (25.4mm) in width and 20.00" (508.0mm) in length to eliminate the need for tools in common applications
Color	Black

applications

Suitable in preventing recirculated or bypass air in cabinets where sealing of air gaps is critical to the function of network equipment. The blanking foam strips are typically installed in CAC or VED applications to improve efficiency of these solutions. This blanking

foam strip product can be stacked, folded, rolled, or manipulated in ways that allow the product to seal various size openings that are not typically filled by tool-less blanking panels or other blanking options.

Full Length Blanking Shade

4 – 45 consecutive rack units: FLBSIM-Y

Tool-Less Blanking Panels

1 RU x 19" (483mm) width for 3/8" square holes: TLBP1S-V

2 RU x 19" (483mm) width for 3/8" square holes: TLBP2S-V

1 RU x 19" (483mm) width for round holes: TLBP1R-V

2 RU x 19" (483mm) width for round holes: TLBP2R-V

Cool Boot[®] Raised Floor Air Sealing Grommet (Surface Mount)

6" x 8": RFG6X8SMY

8" x 8": RFG8X8SMY

10" x 8": RFG10X8SMY

12" x 4": RFG12X4SMY

12" x 8": RFG12X8SMY

4.5" diameter: RFG3DSMY

6.5" diameter: RFG5DSMY

Cool Boot[®] Raised Floor Air Sealing Grommet (Integral Mount)

6" x 8": RFG6X8Y

8" x 8": RFG8X8Y

10" x 8": RFG10X8Y

12" x 4": RFG12X4Y


12" x 8": RFG12X8Y

4.5" diameter: RFG3DY

6.5" diameter: RFG5DY

Blanking Foam Strips

Blanking Foam Strip Dimensions

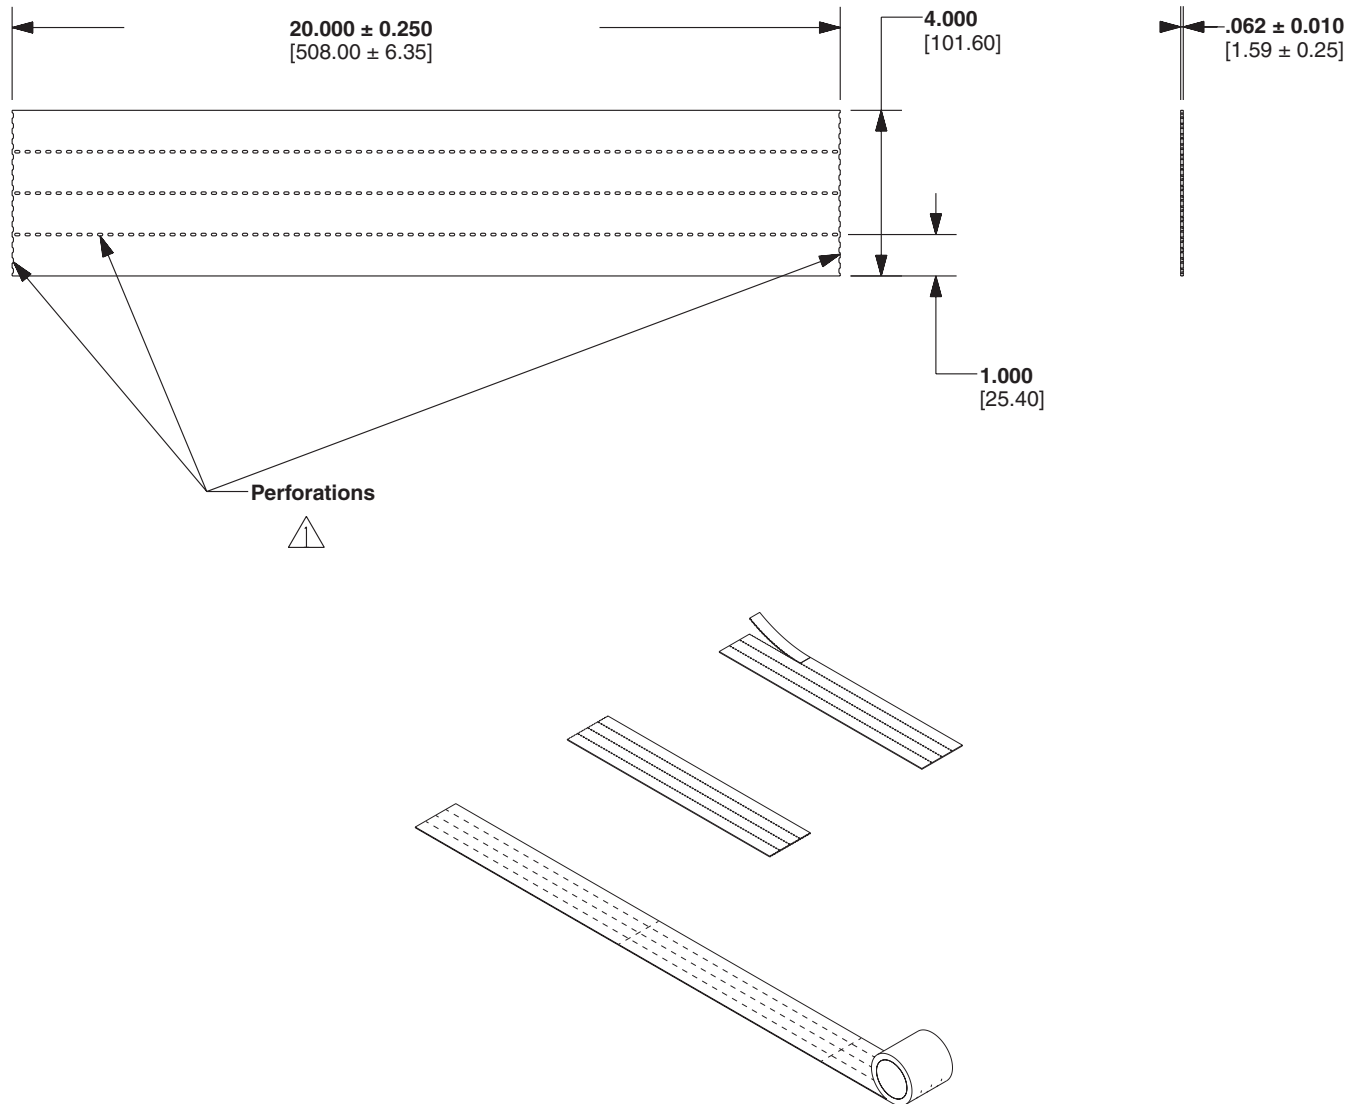

Ordering Information

Part Number	Part Description	Color	Length In. (mm):	Width In. (mm):
BFS100X2000	Adhesive-backed foam strips, 1/16" (1.6mm) closed-cell vinyl foam, perforated to create multiples of 1.00" (25.4mm) x 20.00" (508.0mm) strips.	Black	100.00 (2540.0)	4.00 (101.6)

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT[®]

© 2013 Panduit Corp.
ALL RIGHTS RESERVED.
RKSP124--WW-ENG
1/2013

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Racks & Rack Cabinet Accessories](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[CR-1727](#) [M00-PLN](#) [F2420](#) [F2424](#) [8310-1032-SS](#) [9104](#) [PLFF2000](#) [PLFF6000](#) [GP216](#) [PTFA60000LG](#) [H-9163-B](#) [AC220-84-1](#) [HEH050BA](#)
[1427C3](#) [BAS-5104](#) [N-700-2](#) [190-002](#) [HTL10](#) [HTS10](#) [PC-118](#) [PC-780L](#) [PC-79](#) [PC-800](#) [SC4-28](#) [F3024](#) [AKWAMT](#) [PLFF1000](#) [GRPB12PG](#)
[CG3-340S/12](#) [2CWDP36](#) [2CWDP48](#) [2SSHINGE](#) [CP-001BK](#) [CPL19431LG1](#) [R570-004-107](#) [M6123-4007-SS](#) [TS170](#) [531300535](#) [BRX-](#)
[12290](#) [C4BD3077SBK1](#) [UPS 7-17-14 PLAIN](#) [LP40](#) [5261304-07](#) [CCA26-44-01](#) [706-102](#) [CG3-160G](#) [7112C-PLN ALUM](#) [CM10](#) [TS81](#) [7142](#)