


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0347082013](#)  
**Status:** **Active**  
**Overview:** [Stac64 Single, Multi-Pocket and Hybrid Header System](#)  
**Description:** [Stac64 2 Bay Right-Angle Headers, 32 Circuits, Bay A 12 Circuit Signal Header, Polarization A, Black; Bay B 20 Circuit Signal Header, Polarization B, Gray; Tray](#)

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-31300-892-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-31372-100-001 (PDF)</a>	<a href="#">Product Literature (PDF)</a>
<a href="#">Application Specification AS-34729-020-001 (PDF)</a>	

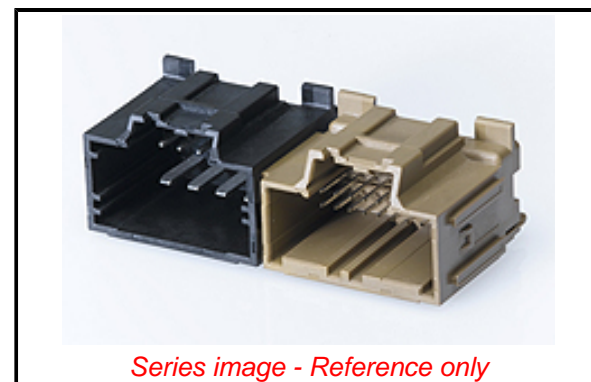

**General**

Product Family	PCB Headers
Series	<a href="#">34708</a>
Application	Power, Wire-to-Board
Comments	Bay A 12 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay B 20 Circuits Stac64 Right Angle Signal Header, Polarization B, Bay A 12 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay B 20 Circuits Stac64 Right Angle Signal Header, Polarization B
Overview	<a href="#">Stac64 Single, Multi-Pocket and Hybrid Header System</a>
Product Literature Order No	987650-4561
Product Name	Stac64
UPC	884982206090

**Physical**

Breakaway	No
Circuits (Loaded)	32
Circuits (maximum)	32
Color - Resin	Black, Gray
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	High Temperature Thermoplastic
Net Weight	14.839/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
-ED/88/2018 (15  
January 2019)

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

Not Relevant

ELV

Compliant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[34708](#) Series

**Mates With**

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle

Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-34729-020-001
Packaging Specification	PK-31300-892-001
Product Specification	PS-31372-100-001
Sales Drawing	SD-34708-200-001

This document was generated on 03/12/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [600858](#) [60403001](#) [60993906-B](#) [60993913-B](#) [629515004020001](#) [M902-2131](#) [M902-2161](#) [M902-2344](#) [72.330.1035.1](#)  
[73.353.4028.0](#) [F118010](#) [F119300-B](#) [F132210](#) [F132210-B](#) [F166900](#) [F180100](#) [F258300](#) [F258300-B](#) [F294300-B](#) [F339100](#) [F339700](#) [F358300-](#)  
[B](#) [F374110](#) [F407400](#) [F412210](#) [F427600](#) [F444110](#) [F487000](#) [F495100-B](#) [F500900-B](#) [F509500B-B](#) [770444-1](#) [776880-1](#) [827153-1](#) [881735-1](#)  
[8N1515-32-24P](#) [9-1326727-8](#) [9-1326729-8](#) [925467-1](#) [925474-1](#) [928905-1](#) [936398-2](#) [964562-1](#) [964562-4](#) [964731-2](#) [965051-1](#) [968782-1](#)  
[GT17SA-8DS-HU](#) [GT17VS-10DP-5.2CF](#)