
## MALLORY Mallory Sonalert Products, Inc. Part #: Sales Outline Drawing Revision:

ZA028SDMT6

Specifications:

Sound Level Category:	Soft	Soft	Soft	Soft
Mode of Operation:	Continuous	Slow Pulse @ 1 PPS	Fast Pulse @ 10 PPS	Siren Sweep 3.3 - 4 kHz @ 5 Sweeps per Sec.
Loudness @ 2 FT:	65 to 75 dB(A) Typ.	65 to 75 dB(A) Typ.	65 to 75 dB(A) Typ.	65 to 75 dB(A) Typ.
Pulse Rate (PPS):		1	10	5
Frequency:	3900 ± 500 Hz	3900 ± 500 Hz	3900 ± 500 Hz	3.3 - 4 kHz
Connection:	"+" to Positive, "-" to Ground	"+" to Positive, "-" and "1" to Ground	"+" to Positive, "-" and "2" to Ground	"+" to Positive, "-", "1" and "2" to Ground
Voltage Rating:	16 to 28 VDC			
Current Draw:	40mA MAX			
Housing Material:	6/6 Nylon, Color: Black			
Storage Temperature:	-40° to +80° C			
Operating Temperature	-30° to +65° C			
Panel Mounting:	Recommended hole size is 22.5 mm. Thread front will fit standard 22.5mm hole.			
Knurled Nut:	Used to attach part to panel. The max recommended torque is 10 in-lbs.			
Weight (Typical):	28 g			
NEMA 3R,4X, & 12:	Approved with use of ACC03.			
Options:	Please contact factory.			

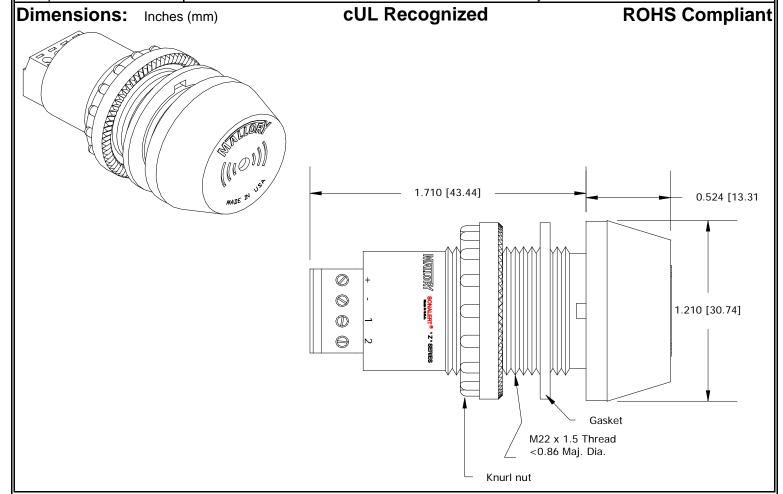

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Indicators & Alerts category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

M2BJ-BH24E 6-4 68S1240-PA MBA-624 F/BC 40P-DR LF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-27A35PQ PL-27A35PSQ PS-531Q AB2020B-2-LW1 EBPT-401 PB06SD12AP PB-1220PEQ S6109 SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S AB2025B-LW50-R ESZ-25B-5-250B F/BC 35-DR LF FCM12PLF F/EB20P-DR LF F/HU110MP24V-IP67B LF AI-2835-TF-LW150-2-R AI-4228-TF-LW305-R FSMD8585JSLF FSS-26T F/SU 21-02 LF F/TCW 05 WITH LABEL LF F/UCW 03 WITH LABEL LF F/UCW 06 WITH LABEL LF PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PLD-27A35PQ PS-552Q CM-5 M2BJ-BH24E-D REF-202 LSC628ANR 5-100 PAL-328 03-810.001 RTO-1R07-001 PL-21N31PQ PF-27A25PSQ