




- 1. MATERIAL: BODY - ALUMINUM, TIN PLATED SCREW - ALUMINUM, TIN PLATED
- 2. UL LISTED & CSA CERTIFIED FOR USE UP TO 600V & TEMPERATURE RATED 90°C (AL9CU)
- 3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM STRANDED CODE CONDUCTOR
- 4. THESE PARTS ARE ROHS COMPLIANT
- 5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE PANDUIT CMP-100 RECOMMENDED FOR PAD TO PAD AND CONDUCTOR SURFACES
- 6. SEE PACKAGING LABEL FOR TIGHTENING TORQUE INFORMATION
- 7. PKG QTY: 3 = 3





	PART NU MBER	DIMENSIONS - IN [mm] +/02 [.5]											STUD	WIRE STRIP	WIRE	
		А	В	D	G	Т	Н	w	C MAX.	J	К	L	SIZE	LENGTH	RANGE	HEX KEY*
\wedge \wedge	LAM2SA300-56-3	3.00	1.00	1.00	.47	.50	2.00	1.00	.53	1.38	.56	1.25	5/16	1.02 [25.9]	300kcmil-6 AWG	5/16
B A		[76.2]	[25.4]	[25.4]	[11.9]	[12.7]	[50.8]	[25.4]	[13.5]	[35.1]	[14.2]	[31.8]				
	LAM2SA300-38-3	3.00	1.00	1.00	.47	.50	2.00	1.00	.53	1.38	.56	1.25	3/8	1 02 [25 0]	300kcmil-6 AWG	5/16
<u> </u>		[76.2]	[25.4]	[25.4]	[11.9]	[12.7]	[50.8]	[25.4]	[13.5]	[35.1]	[14.2]	[31.8]		1.02 [23.5]		

^{*} HEX SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART

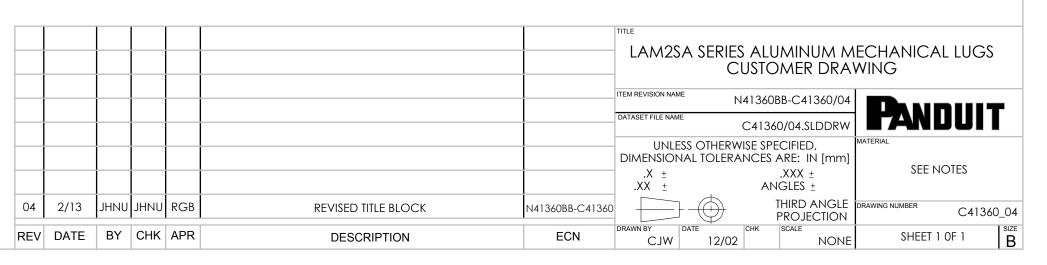

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873
1 M14-516R/SK M14-6RSX M18-10FLX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN-A 62-NBM-A 63-S 640179-1

640917-2-CUT-TAPE 6501550002 66107-2-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006

MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL

72M-250-32-NBL 7310 73F-250-32 73F-250-32-NBL 73F-250-32-NL F14-10C F-1M 751-250