

MOLC SERIES

(1.27 mm) .050"

QUAD ROW TERMINAL STRIP

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MOLC

- Insulator Material:** Black Liquid Crystal Polymer
- Terminal Material:** Phosphor Bronze
- Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Current Rating:** 3.8 A per pin (4 pins powered)
- Voltage Rating:** 165 VAC/230 VDC
- Operating Temp Range:** -55 °C to +125 °C
- RoHS Compliant:** Yes

PROCESSING

- Lead-Free Solderable:** Yes
- SMT Lead Coplanarity:** (0.10 mm) .004" max (20-25), (0.15 mm) .006" max (30-50)*
- *(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



OTHER SOLUTIONS

- Surface mount design with Tiger Buy™ contacts (see TOLC/SOLC Series)


ALSO AVAILABLE (MOQ Required)

- Other sizes
- Alignment pins
- Other platings
- Contact Samtec.

Note: Some sizes, styles and options are non-standard, non-returnable.

Mates with: **FOLC**


Ultra high-density four row design

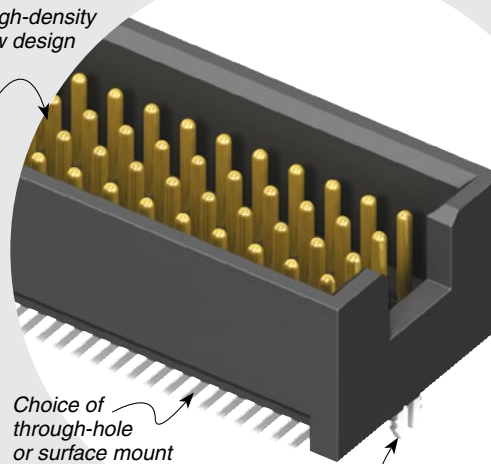

Choice of through-hole or surface mount

Locking clip option

APPLICATIONS



LEAD STYLE	MATED HEIGHT*
MOLC -01	(5.97) .235
-11 -01	(7.75) .305
-31	(11.43) .450

*Processing conditions will affect mated height.

MOLC
1
NO. PINS PER ROW
LEAD STYLE
PLATING OPTION
Q
OPTION

20, 25, 30, 35, 40, 45, 50
(Standard sizes)

-X'1
= Through-hole
(Specify from chart)

-02
= Surface Mount

-M1
= Mixed Technology

-L
= 10 μ" (0.25 μm)
Gold on post,
Matte Tin on tail

-LC
= Locking Clip
(Manual placement required)

-P
= Pick & Place Pad
(-02 only)

-TR
= Tape & Reel
(-02 only)

MIXED TECHNOLOGY

(5.59) .220 (3.38) .133

THROUGH-HOLE

(2.59) .102 (8.13) .320 (0.25) .010 (1.90) .075

LEAD STYLE CHART

LEAD STYLE	A	B
-01	(5.59) .220	(3.38) .133
-11	(7.34) .289	(3.66) .144
-31	(11.05) .435	

TECHNICAL DRAWINGS

No. of positions x (1.27) .050 + (2.54) .100
No. of positions x (1.27) .050 + (0.76) .030

Through-hole = No. of positions x (1.27) .050 + (1.65) .065
Surface Mount = No. of positions x (1.27) .050 + (1.52) .060

Due to technical progress, all designs, specifications and components are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)