


datasheet for AK 2 B 2540 I  
 article number: 972405100



<b>product description:</b>	order number: 972 405-100
<b>description:</b>	Contact-protected, high-strength, wide-opening alligator clip. Clamping range up to 30mm bolt diameter. Solid wire clip, U-shaped and fine wire section. Nickel-plated brass connecting socket, pluggable with 4mm safety measuring leads.
<b>typ:</b>	AK 2 B 2540 I schwarz/black
<b>system:</b>	4mm safety system
<b>order number:</b>	972 405-100
<b>clamping range:</b>	30 mm
<b>color</b>	●
<b>other color versions:</b>	●●●●●●
<b>technical data</b>	
<b>measurement category acc. to IEC 61010:</b>	CAT II
<b>type of contact:</b>	clamp
<b>type of termination:</b>	4 mm socket (unsprung)
<b>rated voltage:</b>	AC/DC 1000 V
<b>rated current:</b>	32 A
<a href="#">Please consider derating curve!</a>	
<b>contact resistance:</b>	10 mOhm
<b>material</b>	
<b>contact material:</b>	brass
<b>contact surface material:</b>	nickel
<b>housing material:</b>	PP
<b>environmental conditions:</b>	
<b>temperature range:</b>	-30 °C to +90 °C
<b>inflammable class:</b>	
<b>housing (basic material):</b>	UL 94 HB
<b>drawing</b>	

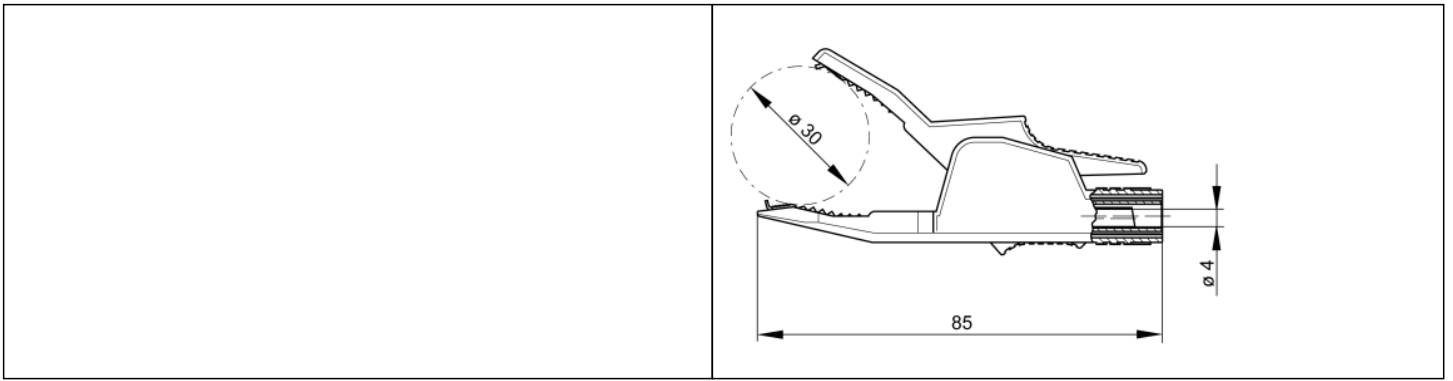

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Clips](#) category:*

*Click to view products by [Hirschmann](#) manufacturer:*

Other Similar products are found below :

[010000](#) [923742-28](#) [923743-16](#) [923850-C](#) [927739-40](#) [BU-656-0](#) [923738-28](#) [923743-20](#) [4140A](#) [4324A](#) [TL820](#) [TL822](#) [5116](#) [5450](#) [5216](#)  
[5252](#) [5454](#) [5694](#) [923700](#) [923698](#) [CR0060](#) [3038](#) [0040.1151.2](#) [927739-20](#) [923743-14](#) [923743-40](#) [R999701600](#) [923706](#) [5240](#) [603006001](#)  
[930317800](#) [930317801](#) [973889100](#) [923714](#) [R999710600](#) [949-1](#) [458-3](#) [SK 201200278 020](#) [AA0-A4830-A00](#) [00425](#) [R8-1A RED](#) [R8-1B](#)  
[BLACK](#) [R8-54 BLACK](#) [R8-54 RED](#) [MA1SW](#) [MA260SH SW](#) [AX-CR-02-SET](#) [5004-LM-IEC-RT](#) [5004-LM-IEC-SW](#) [5066-IEC-GE](#)