

**FEATURES:**

- RoHS compliant
- High efficiency up to 82%
- Low profile plastic package
- 7 pin SIP package
- Operating temperature -40°C to + 85°C
- Continuous short circuit protection
- Pin compatible with multiple manufacturers
- Up to 3000VDC Isolation

**Models****Single output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1DS-0303S-NZ	3.0-3.6	3.3	303	1500	78
AM1DS-0305S-NZ	3.0-3.6	5	200	1500	79
AM1DS-0505S-NZ	4.5-5.5	5	200	1500	80
AM1DS-0509S-NZ	4.5-5.5	9	112	1500	80
AM1DS-0512S-NZ	4.5-5.5	12	83	1500	81
AM1DS-0515S-NZ	4.5-5.5	15	67	1500	81
AM1DS-0524S-NZ	4.5-5.5	24	42	1500	81
AM1DS-1205S-NZ	10.8-13.2	5	200	1500	80
AM1DS-1209S-NZ	10.8-13.2	9	112	1500	80
AM1DS-1212S-NZ	10.8-13.2	12	83	1500	81
AM1DS-1215S-NZ	10.8-13.2	15	67	1500	81
AM1DS-1515S-NZ	13.5-16.5	15	67	1500	80
AM1DS-2403S-NZ	21.6-26.4	3.3	303	1500	79
AM1DS-2405S-NZ	21.6-26.4	5	200	1500	79
AM1DS-2412S-NZ	21.6-26.4	12	83	1500	81
AM1DS-2415S-NZ	21.6-26.4	15	67	1500	82
AM1DS-0305SH30-NZ	3.0-3.6	5	200	3000	79
AM1DS-0505SH30-NZ	4.5-5.5	5	200	3000	80
AM1DS-0512SH30-NZ	4.5-5.5	12	83	3000	80
AM1DS-0515SH30-NZ	4.5-5.5	15	67	3000	81
AM1DS-0524SH30-NZ	4.5-5.5	24	42	3000	81
AM1DS-1205SH30-NZ	10.8-13.2	5	200	3000	80
AM1DS-1212SH30-NZ	10.8-13.2	12	83	3000	81
AM1DS-1215SH30-NZ	10.8-13.2	15	67	3000	81
AM1DS-2405SH30-NZ	21.6-26.4	5	200	3000	79
AM1DS-2412SH30-NZ	21.6-26.4	12	83	3000	81
AM1DS-2415SH30-NZ	21.6-26.4	15	67	3000	82

Models**Dual output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (Ma)	Isolation (VDC)	Efficiency (%)
AM1DS-0505D-NZ	4.5-5.5	±5	±100	1500	80
AM1DS-0509D-NZ	4.5-5.5	±9	±56	1500	80
AM1DS-0512D-NZ	4.5-5.5	±12	±42	1500	80
AM1DS-0515D-NZ	4.5-5.5	±15	±34	1500	81
AM1DS-0524D-NZ	4.5-5.5	±24	±21	1500	81
AM1DS-1205D-NZ	10.8-13.2	±5	±100	1500	80
AM1DS-1212D-NZ	10.8-13.2	±12	±42	1500	81
AM1DS-1215D-NZ	10.8-13.2	±15	±34	1500	81
AM1DS-2405D-NZ	21.6-26.4	±5	±100	1500	79
AM1DS-2412D-NZ	21.6-26.4	±12	±42	1500	81
AM1DS-2415D-NZ	21.6-26.4	±15	±34	1500	82
AM1DS-0505DH30-NZ	4.5-5.5	±5	±100	3000	80
AM1DS-0512DH30-NZ	4.5-5.5	±12	±42	3000	80

Models

Dual output (continued)

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (Ma)	Isolation (VDC)	Efficiency (%)
AM1DS-0515DH30-NZ	4.5-5.5	±15	±34	3000	81
AM1DS-0524DH30-NZ	4.5-5.5	±24	±21	3000	81
AM1DS-1205DH30-NZ	4.5-5.5	±5	±100	3000	81
AM1DS-1212DH30-NZ	10.8-13.2	±12	±42	3000	81
AM1DS-1215DH30-NZ	10.8-13.2	±15	±34	3000	79
AM1DS-2405DH30-NZ	21.6-26.4	±5	±100	3000	81
AM1DS-2412DH30-NZ	21.6-26.4	±12	±42	3000	81
AM1DS-2415DH30-NZ	21.6-26.4	±15	±34	3000	82

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	3.3	3.0-3.6		VDC
	5	4.5-5.5		
	12	10.8-13.2		
	15	13.5-16.5		
	24	21.6-26.4		
Filter	Capacitor			
Absolute Maximum Rating	3.3		7	VDC
	5		9	
	12		18	
	15		21	
	24		30	
Peak Input Voltage time			1	s
No Load Input Current			50	mA

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		1500, 3000	VDC
Resistance		> 1000		MOhm
Capacitance		20		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±5		%
Short Circuit protection		Continuous		
Short circuit restart		Auto recovery		
Line voltage regulation	For 1.0% change of Vin	±1.2		% of Vin
Load voltage regulation	load 10~100%	15%		%
Temperature coefficient		±0.03		%/°C
Ripple & Noise	20MHz Bandwidth	(output 3.3/5/12) 30 (output 15/24) 60		mV p-p
Minimum Load Current		10		% of Max

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	100 - 300		KHz
Operating temperature		-40 to +85		°C
Storage temperature		-55 to +125		°C
Maximum case temperature			100	°C
Derating		Not-Required		%/°C
Cooling		Free air convection		


General Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Humidity			95	% RH
Case material	Non-conductive black plastic (UL94V-0 rated)			
Weight		2.3		g
Dimensions (L x W x H)		0.77 x 0.24 x 0.37 inches	19.5 x 6.00 x 9.35 mm	
MTBF		>3,450,000 hrs (MIL-HDBK -217F, Ground Benign, t _a =+25°C)		
Maximum soldering temperature	1.5 mm from case for 10sec		300	°C

Pin Out Specifications

Pin	1500 VDC		3000VDC	
	Single	Dual	Single	Dual
1	+ V Input	+ V Input	+ V Input	+ V Input
2	- V Input	- V Input	- V Input	- V Input
4	- V Output	- V Output	No pin	No pin
5	No pin	Common	- V Output	- V Output
6	+ V Output	+ V Output	No pin	Common
7	No pin	No pin	+ V Output	+ V Output

Dimensions

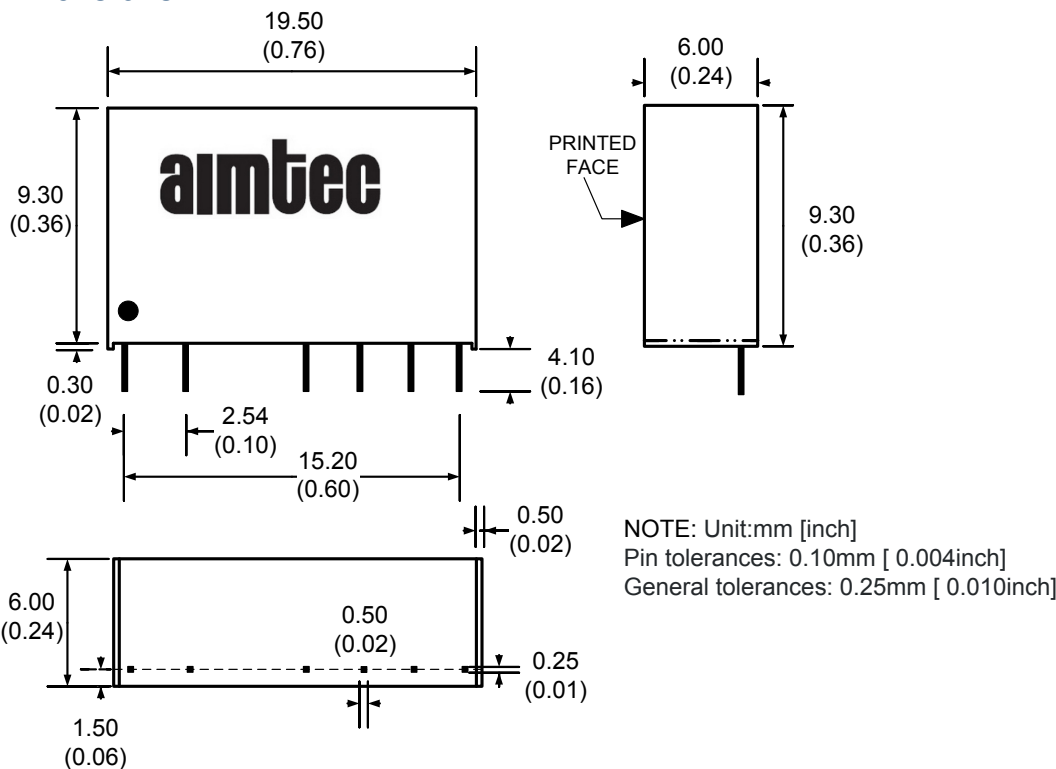

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Aimtec](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [TME 0509S](#)