

(0.80 mm) .0315"

FTE SERIES

# SMT MICRO HEADER

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?FTE](http://www.samtec.com?FTE)

**Insulator Material:**  
Black Liquid Crystal Polymer  
**Terminal Material:**  
Phosphor Bronze

**Plating:**  
Au over 50  $\mu$ " (1.27  $\mu$ m) Ni  
**Current Rating (FTE/CLE):**  
2.7 A per pin  
(1 pin powered per row)  
**Operating Temp Range:**  
-55 °C to +125 °C  
**RoHS Compliant:**  
Yes

## PROCESSING

**Lead-Free Solderable:**  
Yes  
**-DV Lead Coplanarity:**  
(0.10 mm) .004" max  
**-DH Lead Coplanarity:**  
(0.10 mm) .004" max (05-25)  
(0.15 mm) .006" max (26-50)

## RECOGNITIONS



For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



## ALSO AVAILABLE (MOQ Required)

- End shrouds with board locks
- Gold flash plating Contact Samtec.

Mates with:  
CLE

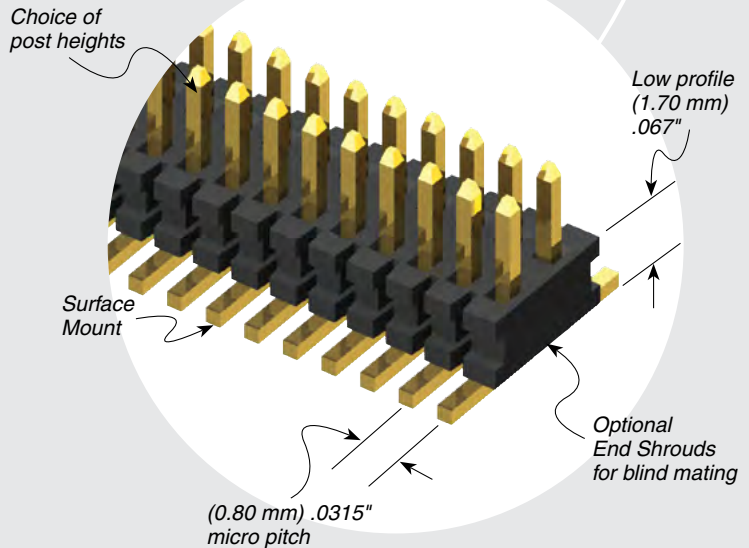

FTE	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	TAIL OPTION	FLEX SHROUD OPTIONS	OTHER OPTION
1	05 thru 90	Specify LEAD STYLE from chart	-G = 10 $\mu$ " (0.25 $\mu$ m) Gold on post, Gold flash on balance	-DV = Dual Vertical -DH = Dual Horizontal (50 pos. max.)	Style -01 -DV only (11 pins/row min.) -ES = End Shroud -EC = End Shroud with Locking Clips (Manual placement required) -EP = End Shroud with Guide Posts	-A = Alignment Pin (5 pos. min.) Metal or plastic at Samtec discretion (-DV only) -K = (2.50 mm) .098" DIA Polyimide Film Pick & Place Pad (-DH only) -P = Plastic Pick & Place Pad (8 pos. min.) -DV only -TR = Tape & Reel Packaging

LEAD STYLE	A
-01	(1.90) .075
-02	(4.45) .175
-03	(3.05) .120

OPTION	Z
-ES	(1.57) .062
-EC	(4.11) .162
-EP	(5.51) .217

**Note:** Some lengths, styles and options are non-standard, non-returnable.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)