



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

**AC/DC SWITCHING POWER
SUPPLY
150 WATTS
AC INPUT 90-264 VAC**


DTE150-FWX-F-W



Dimension : L188.5×W104.5×H60mm



General Description

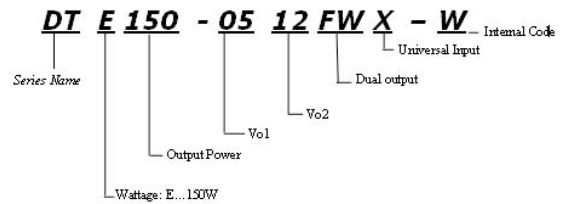

Features

1. With Active PFC
2. Universal Input
3. AC Input : IEC 320-C14 Inlet
4. Two year warranty
5. Optional +5VSB @2A with 5% O/P regulation and 50mV ripple
6. High reliability
7. 100% burn-in tested
8. 40mm cooling fan with speed control
9. 100% hi-pot tested
10. Short-circuit, over load, over voltage protection

Input

Input Voltage	90-264VAC
Range:	
Frequency:	47-63Hz
Input Current (RMS) :	
	2.5A max.@ 90VAC
	1A max.@ 264VAC
Power Factor:	>0.9 (20%~100% Load)
Efficiency :	>80% @ full load, 115VAC
Ripple & Noise :	1%

Output Characteristic	DTE150-0519FWX-F-W				
	Output Rating		Po (Max.)	O/P Regulation	Ripple & Noise(Vp-p)
	Vo	Io (max)			
5 Vdc	+5Vdc	15A	150	5%	50mV
19 Vdc	+19Vdc	5A		5%	190mV

Note: 1. Peak-to-peak with 20MHz bandwidth with a tantalum 10uF

Output Characteristic	DTE150-1212FWX-F-W				
	Output Rating		Po (Max.)	O/P Regulation	Ripple & Noise(Vp-p)
	Vo	Io (max)			
12 Vdc	+12Vdc	12A	150	5%	120mV
-12 Vdc	-12Vdc	1.5A		5%	120mV

Note: 1. Peak-to-peak with 20MHz bandwidth with a tantalum 10uF

Output Characteristic	DTE150-0512FWX-F-W				
	Output Rating		Po (Max.)	O/P Regulation	Ripple & Noise(Vp-p)
	Vo	Io (max)			
5 Vdc	+5Vdc	15A	150	5%	50mV
12 Vdc	+12Vdc	8A		5%	120mV

Note: 1. Peak-to-peak with 20MHz bandwidth with a tantalum 10uF

Hold-up time	>10ms typical at full load @ 115VAC
--------------	-------------------------------------




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature	0 to +50°C
Storage Temperature	-10 to +70 °C
Humidity	20~90%
MTBF demonstrated	>100,000 hours at full load and 25 °C ambient temperature
Environmental Agencies	
Safety Standards	UL 60950-1 CSA 22.2-No.60950-1 TUV EN60950-1 CB IEC 60950-1
EMI Standards (Meet)	FCC Class B CISPR 22 Class B EN 55022 Class B CE
Protection	
Short circuit protection	Auto-recover
Over Voltage Protection	Auto-recover
Over Load Protection	Auto-recover
Mechanical	
Dimension [mm]	Dimension : L188.5×W104.5×H60mm

DIMENSION DIAGRAM (mm)

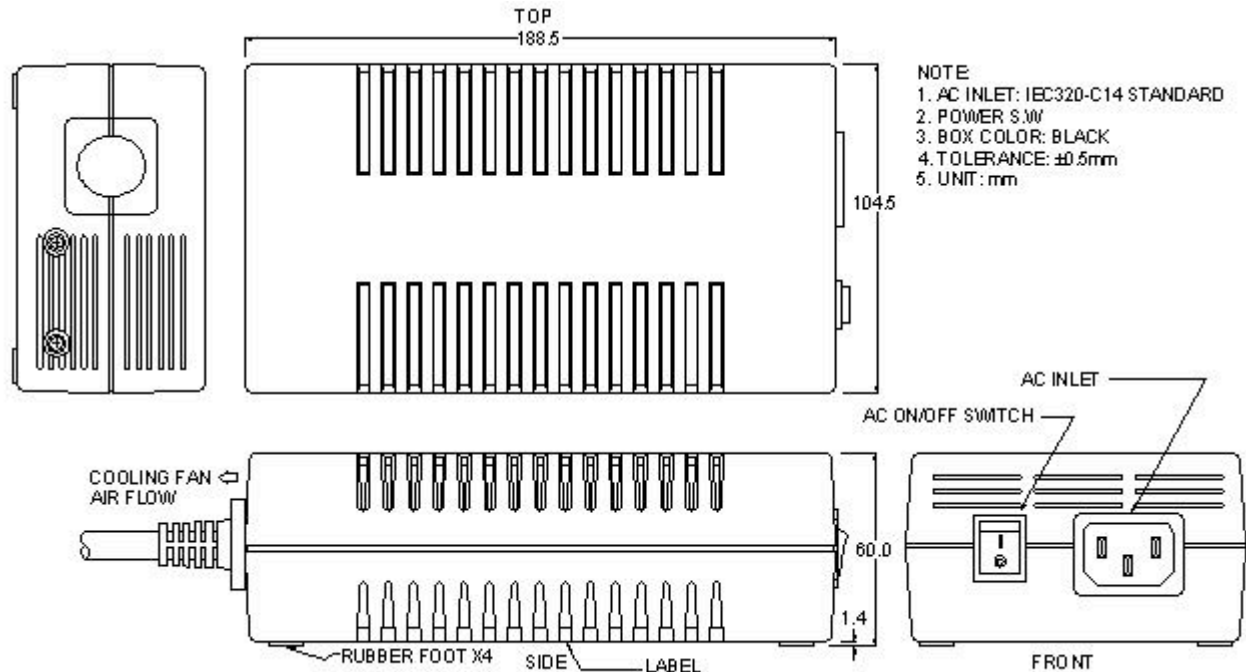

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [ETA](#) manufacturer:

Other Similar products are found below :

[YS50-1903150](#) [ADP-40KD BBBM](#) [DTA27-3X-W-5](#) [212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [212A2220-02](#) [212A2220-04](#)
[FWE030015A-10A](#) [TRH100A135-02E12-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A280-01E13-](#)
[Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH50A120-02E01-Level-VI](#) [TRH50A120-12E01-Level-VI](#) [TRH50A120-40E01-Level-VI](#)
[TRH50A150-12E12-Level-VI](#) [TRH50A180-11E03-Level-VI](#) [TRH50A240-02E03-Level-VI](#) [TRH70A120-11E01-Level-VI](#) [TRH70A150-](#)
[12E02-Level-VI](#) [TRH70A240-11E03-Level-VI](#) [416FG41017](#) [DTA27-0512FWX-W3](#) [TRH100A120-02E12-Level-VI](#) [TRH100A150-11E12-](#)
[Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#)
[TRH100A480-11E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH50A120-11E01-Level-VI](#) [TRH50A120-49E01-Level-VI](#) [TRH50A150-](#)
[11E02-Level-VI](#) [TRH50A150-12E02-Level-VI](#) [TRH70A120-01E01-Level-VI](#) [TRH70A480-02E03-Level-VI](#) [KR8-PS01](#) [1894875](#)
[FWE030012A-10A](#) [FWE050024B-10A](#) [820A4080G](#) [825A0052-03](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#)