


Tripp Lite 1111 W. 35th Street Chicago, IL 60609 USA Telephone: 773.869.1234 www.tripplite.com

8 Right-Angle Outlet Vertical Power Strip, 120V, 15A, 15-ft. Cord, 5-15P, 24 in.

MODEL NUMBER: PS2408RA

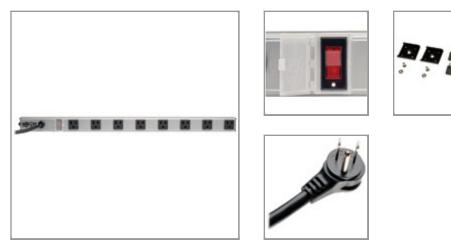

Highlights

- Ideal for applications needing multiple convenience outlets for powering a variety of electronic equipment
- 24-in mountable housing with 8 right-angle NEMA 5-15R receptacles, right-angle plug and a 15 ft. power cord
- Lighted, covered On/Off switch and 15-amp circuit breaker
- Sturdy construction and heavy-duty, all-metal housing

Package Includes

- PS2408RA Power Strip
- Mounting hardware
- Instruction manual

Description

The PS2408RA provides a 15-amp, 120v power strip with 8 right-angle NEMA 5-15R receptacles in a rugged, all-metal, mountable housing. It allows for both vertical and horizontal mounting, making it ideal for a variety of uses including office, rack-mount, workbench, industrial and telecom applications. With a right angle NEMA 5-15P plug and 15-ft. power cord, you don't have to install the PS2408RA next to outlets you already have; it can be mounted across the room and deliver reliable service where you need it most. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 15-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

Features

Multi-Outlet Power Distribution: Featuring 8 right-angle receptacles compatible with all standard electrical equipment, the PS2408RA is an ideal solution for applications or locations that require power to many devices simultaneously. The 24-in. housing spaces the outlets 2.48 inches apart from center to center, allowing enough room for most AC adapters and transformers.

Vertical or Horizontal Mounting: With vertical or horizontal installation, a rugged housing and plenty of outlets, Tripp Lite's PS2408RA is ideal for point-of-sale and retail display applications as it provides reliable, consistent power service for multiple devices. Tripp Lite's power outlet strips can also be used in home office, workbench and rack enclosure applications. The included mounting hardware allows the PS2408RA to be installed wherever reliable, multi-outlet power distribution is required.

Extra Long Power Cord: Install the PS2408RA far away from its power source and provide power distribution to previously un-powered areas with the extra long, 15-ft. power cord. The PS2408RA can be mounted in a different area, or a completely different room from where it draws AC power, putting you in control of getting reliable power service where you need it most.

Premium Safety Features: The lighted On/Off switch features a translucent cover that eliminates accidental shut-offs while still allowing you to see whether the PS2408RA is operational with a glance. A built-in, 15-amp circuit breaker prevents dangerous circuit overloads that could damage equipment. The breaker immediately shuts off AC input to the PS2408RA when it detects that the equipment load is drawing too much power.



Heavy-Duty Housing: The PS2408RA's rugged, all-metal housing is durably constructed making it a great solution for industrial, retail display and workbench applications.

Specifications

| OUTPUT | | |
|------------------------------------|--|--|
| Frequency Compatibility | 60 Hz | |
| Output Receptacles | (8) 5-15R | |
| Output (Watts) | 1800 | |
| Circuit Breaker (amps) | 15 | |
| Outlet Spacing | 2.48 in. | |
| Right-Angle Outlets | Yes | |
| INPUT | | |
| Nominal Input Voltage(s) Supported | 120V AC | |
| Recommended Electrical Service | 15A 120V | |
| Input Connection Type | Right Angle Nema 5-15P | |
| Input Plug Features | Black | |
| Input Cord Length (ft.) | 15 | |
| Input Cord Length (m) | 4.572 | |
| Input Cord Gauge Type | 14/3 SJT | |
| Voltage Compatibility (VAC) | 120 | |
| USER INTERFACE, ALERTS & CONTROLS | | |
| Switches | Lighted 2 position switch controls power to all outlets | |
| Locking Switch Cover | Transparent on/off switch cover prevents accidental turn-off | |
| PHYSICAL | | |
| Unit Dimensions (hwd / in.) | 1.25 x 1.68 x 24.52 | |
| Unit Dimensions (hwd / cm) | 3.18 x 4.27 x 62.29 | |
| Unit Weight (Ibs.) | 2.71 | |
| Unit Weight (kg) | 1.10 | |
| Material of Construction | Aluminum | |
| Included Mounting Accessories | Includes mounting clips | |
| Receptacle Color | Black | |
| Color (AC Line Cord) | Black | |



| Form Factors Supported | Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications | |
|--|---|--|
| Outlets Measurement (Center to Center) | 63mm | |
| CERTIFICATIONS | | |
| UL1363 (Power Tap) | UL1363 | |
| cUL / CSA (Canada) | cUL | |
| WARRANTY | | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty | |

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: https://www.tripplite.com/products/product-certification-agencies

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Outlet Strips category:

Click to view products by Tripp Lite manufacturer:

Other Similar products are found below :

G20IG606 1301430288 1301530208 1302100069 1301430321 1301530054 1447B163 1585T16A1RA UL602CB-6 UL7408-6 ULHC4-15 V20IG606 UL2063BD TSB 1301530203 4748.03 4309 UL7208-15 3083 3050F 3090 1301530132 1301530117 1301530164 1301530050 1301530141 1301430252 1301530179 1301530065 1301350158 1301530052 1301530068 1301530120 HB0B1L4BT08W1 VB0D2B2BM30P1 HA0A1D0CA10E1 HA0A1M2CM10E1 HA1A1D0CA10E1 VB0B1L2BN24H1 PN1A1C0BA10E1 HA0B1E0CA1081 HA0D2U0CA1081 HA0D2A0CA1081 HA1D2U0CA1081 HA1D2A0CA1081 HB1B2J0AA10M1 LZ1D2A0FA0AJ1 LZ1D2P0FA0AL1 VB0B1L4CN48M1 MA002