


FLEX STACK

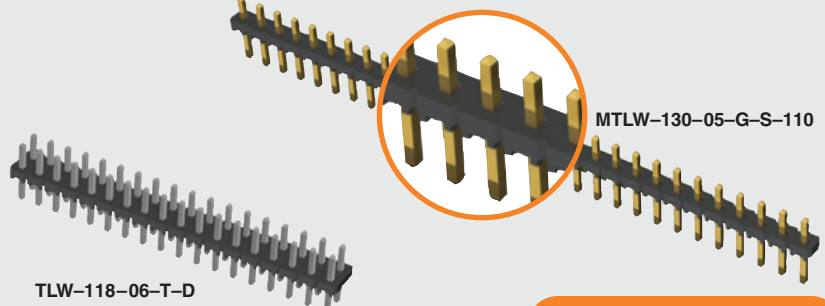

MTLW-130-05-G-S-110

TLW-118-06-T-D

TLW, MTLW SERIES


(2.54 mm) .100"

LOW-PROFILE .025" SQ POST HEADERS

Board Mates:
BSW, CES, SLW, HLE

FEATURES

These headers provide the ultimate low-profile (0.64 mm) .025" square post board stacking system. The high quality Phosphor Bronze terminals are available with a standard short post height (TLW Series) for mating with low-profile sockets, or the post height can be Modified (MTLW Series) to accommodate IDC assemblies and other applications.



TLW	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION																											
01 thru 40 = Single Row		Specify LEAD STYLE from chart		-F = Gold flash on post, Matte Tin on tail	-S = Single Row	-RA = Right-angle (-01 Lead Style only)																											
01 thru 36 = Double Row		-05 & -06		-G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail	-D = Double Row	-“XX” = Polarized Position Specify position for omitted pin.																											
				<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>A</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>N/A</td> <td>(5.84) .230</td> </tr> <tr> <td>-05</td> <td>(4.32) .170</td> <td>(2.67) .105</td> </tr> <tr> <td>-06</td> <td>(3.43) .135</td> <td>(2.67) .105</td> </tr> </tbody> </table>		LEAD STYLE	A	C	-01	N/A	(5.84) .230	-05	(4.32) .170	(2.67) .105	-06	(3.43) .135	(2.67) .105	<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>A</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>N/A</td> <td>(5.84) .230</td> </tr> <tr> <td>-05</td> <td>(4.32) .170</td> <td>(2.67) .105</td> </tr> <tr> <td>-06</td> <td>(3.43) .135</td> <td>(2.67) .105</td> </tr> </tbody> </table>		LEAD STYLE	A	C	-01	N/A	(5.84) .230	-05	(4.32) .170	(2.67) .105	-06	(3.43) .135	(2.67) .105	<p>-T = Matte Tin</p>	
LEAD STYLE	A	C																															
-01	N/A	(5.84) .230																															
-05	(4.32) .170	(2.67) .105																															
-06	(3.43) .135	(2.67) .105																															
LEAD STYLE	A	C																															
-01	N/A	(5.84) .230																															
-05	(4.32) .170	(2.67) .105																															
-06	(3.43) .135	(2.67) .105																															

ALSO AVAILABLE (MOQ Required)

- Other platings

SPECIFICATIONS

For complete specifications see www.samtec.com?TLW or www.samtec.com?MTLW

- Insulator Material:** Black Liquid Crystal Polymer
- Terminal Material:** Phosphor Bronze
- Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Current Rating (TLW/SLW):** 5.2 A per pin (2 pins powered)
- Operating Temp Range:** -55 °C to +105 °C with Tin, -55 °C to +125 °C with Gold
- RoHS Compliant:** Yes
- Lead-Free Solderable:** Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some lengths, styles and options are non-standard, non-returnable. MTLW Series is non-standard, non-returnable.

MTLW	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT																			
01 thru 40 = Single Row		Specify LEAD STYLE from chart			-S = Single Row	-“XXX” = Post Height Dimension (In inches)																			
01 thru 36 = Double Row		<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>-05</td> <td>(8.51) .335</td> </tr> <tr> <td>-06</td> <td>(7.62) .300</td> </tr> <tr> <td>-07</td> <td>(10.92) .430</td> </tr> <tr> <td>-08</td> <td>(13.46) .530</td> </tr> <tr> <td>-09</td> <td>(18.54) .730</td> </tr> <tr> <td>-10</td> <td>(21.08) .830</td> </tr> <tr> <td>-22</td> <td>(16.00) .630</td> </tr> <tr> <td>-23</td> <td>(11.30) .445</td> </tr> <tr> <td>-24</td> <td>(12.19) .480</td> </tr> </tbody> </table>		LEAD STYLE	OAL	-05	(8.51) .335	-06	(7.62) .300	-07	(10.92) .430	-08	(13.46) .530	-09	(18.54) .730	-10	(21.08) .830	-22	(16.00) .630	-23	(11.30) .445	-24	(12.19) .480	<p>-F = Gold flash on post, Matte Tin on tail</p> <p>-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail</p> <p>-G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail</p> <p>-T = Matte Tin</p>	
LEAD STYLE	OAL																								
-05	(8.51) .335																								
-06	(7.62) .300																								
-07	(10.92) .430																								
-08	(13.46) .530																								
-09	(18.54) .730																								
-10	(21.08) .830																								
-22	(16.00) .630																								
-23	(11.30) .445																								
-24	(12.19) .480																								

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#)